

TNC M/F Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter



## AL-LSXM-RT-ME

### Features

- Surge current of 10kA
- Max Power 10W
- Frequency range from 2 to 6 GHz
- Waterproof IP67 rated
- TNC Male to TNC Female connectors
- DC Block
- VSWR <1.2:1
- Low insertion loss
- CE & RoHS compliant
- Directional

### Applications

- Cellular communication systems
- Public safety systems
- Emergency response systems
- Industrial

### Description

RF surge protector (also known as lightning arrester) AL-LSXM-RT-ME from PolyPhaser utilizing a patented spiral inductor design enables an almost instantaneous response to a lightning surge to protect critical hardware while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All PolyPhaser RF surge protector products are available in stock with same day shipping.

### Electrical Specifications

Surge Protector Type DC Handling	Surge Filter DC Block			
Description	Minimum	Typical	Maximum	Units
Frequency Range	2		6	GHz
Impedance		50		Ohms
VSWR			1.2:1	
Insertion Loss		0.1	0.2	dB
Input Power, CW			10	Watts
Surge Current IEC 61000-4-5 8/20µs waveform			10	kA
Throughput Energy for 3kA, 8/20µs waveform			500	nJ

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[TNC M/F Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter AL-LSXM-RT-ME](#)

TNC M/F Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter



## AL-LSXM-RT-ME

### Mechanical Specifications

#### Size

Length	2.7 in [68.58 mm]
Width/Diameter	0.94 in [23.88 mm]
Height	0.94 in [23.88 mm]
Weight	1 lbs [453.59 g]

#### Configuration

Input Connector	TNC Male Reverse Polarity
Output Connector	TNC Female Reverse Polarity

### Environmental Specifications

#### Temperature

Operating Range	-40 to 85 deg C
Storage Range	-40 to +85 deg C

Ingress Protection (IP) Rating

Vibration

IP67

1G at 5Hz to 100Hz

### Compliance Certifications

(see [product page](#) for current document)

### Plotted and Other Data

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[TNC M/F Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter AL-LSXM-RT-ME](#)

TNC M/F Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter



## AL-LSXM-RT-ME

### Typical Performance Data

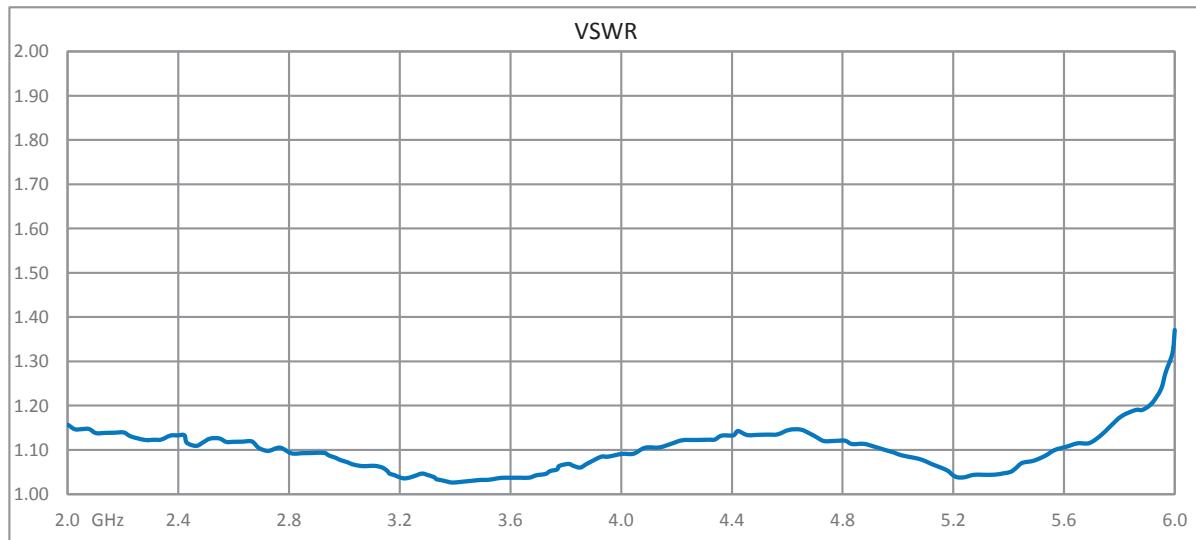


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[TNC M/F Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter AL-LSXM-RT-ME](#)

TNC M/F Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter



## AL-LSXM-RT-ME

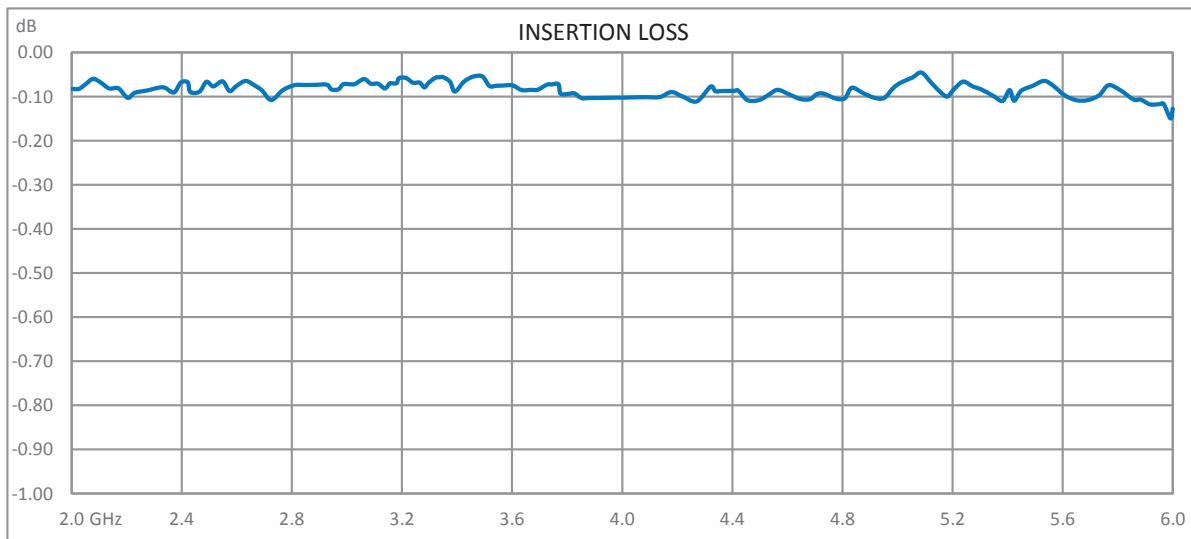

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC M/F Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter AL-LSXM-RT-ME](#)

URL: <https://www.polyphaser.com/tnc-surge-protector-6ghz-filter-al-lsxm-rt-me>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

**AL-LSXM-RT-ME CAD Drawing**

