



6 FT 7/16 to 7/16 M/M Right Angle 195 Series Low Loss Cable Jumper



## CA195LL035-6FT

### Configuration

- Connector 1: 7/16 DIN Male Right Angle
- Connector 2: 7/16 DIN Male
- Cable Type: PPBC-195LL

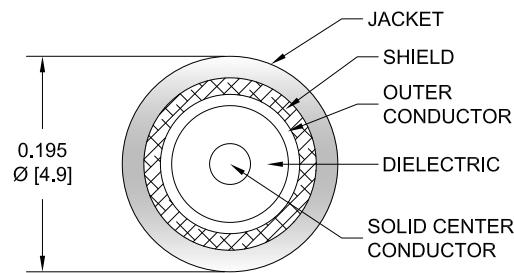

### Features

- LMR Equivalent Coax
- Max Frequency 3 GHz
- Shielding Effectivity > 90 dB
- 80% Phase Velocity
- Low Insertion Loss
- Double Shielded
- PE Jacket
- One Time Bend Radius of 0.5 Inches

### Applications

- General Purpose
- Laboratory Use
- Antenna Installations
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

### Description

PolyPhaser CA195LL035-6FT is a 6 foot 7/16 to 7/16 M/M Right Angle 195 Series Low Loss Cable Jumper is built using high quality components by skilled technicians to ensure a reliable product. The 7/16 M and 7/16 MRA cable jumper connections are designed to industry standard interface dimensions to ensure superior performance. All of these products are available for same day shipment to fulfill your urgent needs. The use of a right angle interface helps when attaching the cable assembly in tight spaces and can reduce strain on the cable/connector interface. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as communications systems, IoT network, Wireless Lan, and many other applications. The CA195LL035-6FT 7/16 to 7/16 cable assembly is the perfect companion to PolyPhaser line of RF surge protection devices particularly when used as an antenna jumper cable.

The 195 Series coax used in these 7/16 to 7/16 assemblies is a 0.195 inch diameter coax with a black PE jacket. This cable's foam PE dielectric is low loss material with a VoP of 80% reducing the attenuation when compared to solid dielectric coax cables. PolyPhaser Low Loss 195 Series coax has a solid center conductor and uses a double shield consisting of a wire braid over a foil tape construction providing >90% shielding effectivity. The construction and materials of the CA195LL035-6FT result in a coax cable assembly with 0.5 inch one time bend radius and a repeat bend radius of 2 inches. The cable assembly's combination of 7/16 to 7/16 M/MRA and 195 Series Low Loss Cable supports a maximum operating frequency of 3000 MHz. Detailed specifications for this configuration includes layout drawings and performance and material specifications. This product is built and tested by our expert technicians to fulfill your cable assembly needs.

Polyolefin heat shrink strain relief boots add additional strength on both ends of this 6 foot assembly. These epoxy filled heat shrinks provide strain relief to help prevent damage from over-bending the assembly ends.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[6 FT 7/16 to 7/16 M/M Right Angle 195 Series Low Loss Cable Jumper CA195LL035-6FT](#)

6 FT 7/16 to 7/16 M/M Right Angle 195 Series Low Loss Cable Jumper



## CA195LL035-6FT

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.5:1	
Velocity of Propagation		80		%
RF Shielding	90			dB
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Operating Voltage (AC)			2,700	Vrms
Jacket Spark			5,000	Vrms

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.54	0.66	0.78	1.02	1.56	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. Insertion Loss is estimated as 0.1 dB per connector and 0.2 dB per right angle connector.

### Mechanical Specifications

#### Size

Length	72 in [182.88 cm]
Diameter	0.195 in [4.95 mm]
Weight	0.649 lbs [294.38 g]

#### Cable

Cable Type	PPBC-195LL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[6 FT 7/16 to 7/16 M/M Right Angle 195 Series Low Loss Cable Jumper CA195LL035-6FT](#)

6 FT 7/16 to 7/16 M/M Right Angle 195 Series Low Loss Cable Jumper



## CA195LL035-6FT

### Connectors

Description	Connector 1	Connector 2
Type	7/16 DIN Male Right Angle	7/16 DIN Male
Specification	IEC 169-4	IEC 61169-4
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Brass, Silver
Contact Plating Specification		5 $\mu$ m minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification		2 $\mu$ m minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification		2 $\mu$ m minimum
Hex Size	32 mm	1 1/4 inch
Torque		18.417 ft-lbs [24.97 Nm]

### Environmental Specifications

#### Temperature

Operating Range

-40 to +85 deg C

### Compliance Certifications

### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 FT 7/16 to 7/16 M/M Right Angle 195 Series Low Loss Cable Jumper CA195LL035-6FT](#)

URL: <https://www.polyphaser.com/6-ft-7-16-to-7-16-m-m-right-angle-195-series-low-loss-cable-jumper-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 FT 7/16 to 7/16 M/M Right Angle 195 Series Low Loss Cable Jumper CA195LL035-6FT](#)

6 FT 7/16 to 7/16 M/M Right Angle 195 Series Low Loss Cable Jumper



## CA195LL035-6FT

---

as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

CA195LL035-6FT CAD Drawing

REV. A		DESCRIPTION INITIAL RELEASE		DATE 07/26/2020	APPROVED SELLIS
REVISIONS					
<p>7/16 MALE RIGHT ANGLE</p> <p>7/16 MALE</p> <p>2X HEAT SHRINK BOOTING</p> <p>LOW LOSS 195 SERIES COAX</p> <p>LABEL (SEE NOTE 1)</p> <p>LENGTH MEASURED FROM CONTACT TO CONTACT</p>					
<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p>DIMENSIONS IN [ ] ARE INCHES</p> <p><b>NOTES:</b></p> <ol style="list-style-type: none"> <li>1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0" FROM THE FRONT OF THE CONNECTOR.</li> </ol> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF POLYPHASER INC. ALL RIGHTS RESERVED.</p> <p>10701 Airport Road Hayden, Idaho 83835 USA Phone: 1.208.635.6400   1.800.882.9110 Fax: 1.208.762.6133 Website: <a href="http://www.PolyPhaser.com">www.PolyPhaser.com</a> E-mail: <a href="mailto:CustomerService@PolyPhaser.com">CustomerService@PolyPhaser.com</a></p> <p>1 1 OF 1</p> <p>SIZE CAGE CODE DRAWN BY A 30992 MV/VEERAPPAN ITEM NO. CA195LL035 REV A</p>					