

10 M Type N to Type N M/M Right Angle 240 Series Low Loss Cable Jumper



CA240LL017-10M

Configuration

- Connector 1: N Male
- Connector 2: N Male Right Angle
- Cable Type: PPBC-240LL

Features

- LMR Equivalent Coax
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Low Insertion Loss
- Double Shielded
- PE Jacket
- One Time Bend Radius of 0.75 Inches

Applications

- General Purpose
- Laboratory Use
- Antenna Installations
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems


Description

PolyPhaser CA240LL017-10M is a 10 meter Type N to Type N M/M Right Angle 240 Series Low Loss Cable Jumper is built using high quality components by skilled technicians to ensure a reliable product. The Type N Male and Type N Male Right Angle cable jumper connections are designed to industry standard interface dimensions to ensure superior performance. All of these products are available for same day shipment to fulfill your urgent needs. The use of a right angle interface helps when attaching the cable assembly in tight spaces and can reduce strain on the cable/connector interface. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as military / defense, Wireless Lan, research and development, and many other RF systems. The CA240LL017-10M Type N to Type N cable assembly is the perfect companion to PolyPhaser line of RF surge protection devices particularly when used as an antenna jumper cable.

The 240 Series coax used in these Type N to Type N assemblies is a 0.24 inch diameter coax with a black PE jacket. This cable's foam PE dielectric is low loss material with a phase velocity of 84% reducing the attenuation when compared to solid dielectric coax cables. PolyPhaser Low Loss 240 Series coax has a solid center conductor and uses a double shield comprised of a wire braid over a foil tape construction providing >90% shielding effectivity. The construction and materials of the CA240LL017-10M result in a coax cable assembly with 0.75 inch one time bend radius and a repeat bend radius of 2.5 inches. The cable assembly's combination of Type N to Type N Male/Male Right Angle and 240 Series Low Loss Cable supports a maximum operating frequency of 5.8 GHz. You can find detailed performance specifications in the product datasheet. Processes and procedures are in place to ensure products meet the published specifications.

For additional strength, these Type N Male to Type N Male Right Angle cable assemblies have polyolefin heat shrink strain relief boots on both ends of the RF Cable Assembly Jumpers. The heat shrink booting uses a double walled epoxy filled material to prolong the life of the assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[10 M Type N to Type N M/M Right Angle 240 Series Low Loss Cable Jumper CA240LL017-10M](#)

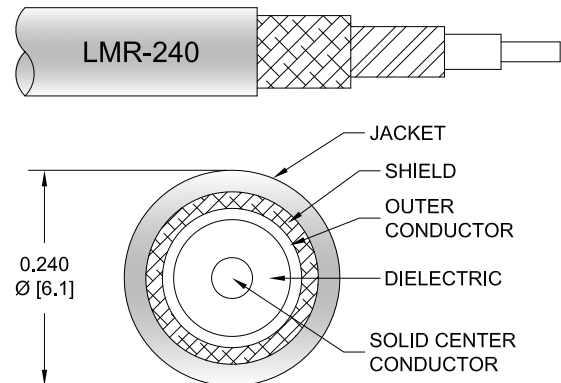

10 M Type N to Type N M/M Right Angle 240 Series Low Loss Cable Jumper



CA240LL017-10M

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.3:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Operating Voltage (AC)			1,500	Vrms
Jacket Spark			5,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Max.)	16.1	20.04	35.79	59.41	90.91	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. Insertion Loss is estimated as 0.15 dB per connector and 0.2 dB per right angle connector.

Mechanical Specifications

Size

Length	393.7 in [10 m]
Diameter	0.24 in [6.1 mm]
Weight	1.15125 lbs [522.2 g]

Cable

Cable Type	PPBC-240LL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.752 in [19.1 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[10 M Type N to Type N M/M Right Angle 240 Series Low Loss Cable Jumper CA240LL017-10M](#)

10 M Type N to Type N M/M Right Angle 240 Series Low Loss Cable Jumper



CA240LL017-10M

Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male Right Angle
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Nexcote
Hex Size	18 mm	
Torque	9 in-lbs [1.02 Nm]	

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Compliance Certifications

Plotted and Other Data

Notes:

- Values at 25°C, sea level.


PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 M Type N to Type N M/M Right Angle 240 Series Low Loss Cable Jumper CA240LL017-10M](https://www.polyphaser.com/10-m-type-n-to-type-n-m-m-right-angle-240-series-low-loss-cable-jumper-p.aspx)

URL: <https://www.polyphaser.com/10-m-type-n-to-type-n-m-m-right-angle-240-series-low-loss-cable-jumper-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

CA240LL017-10M CAD Drawing

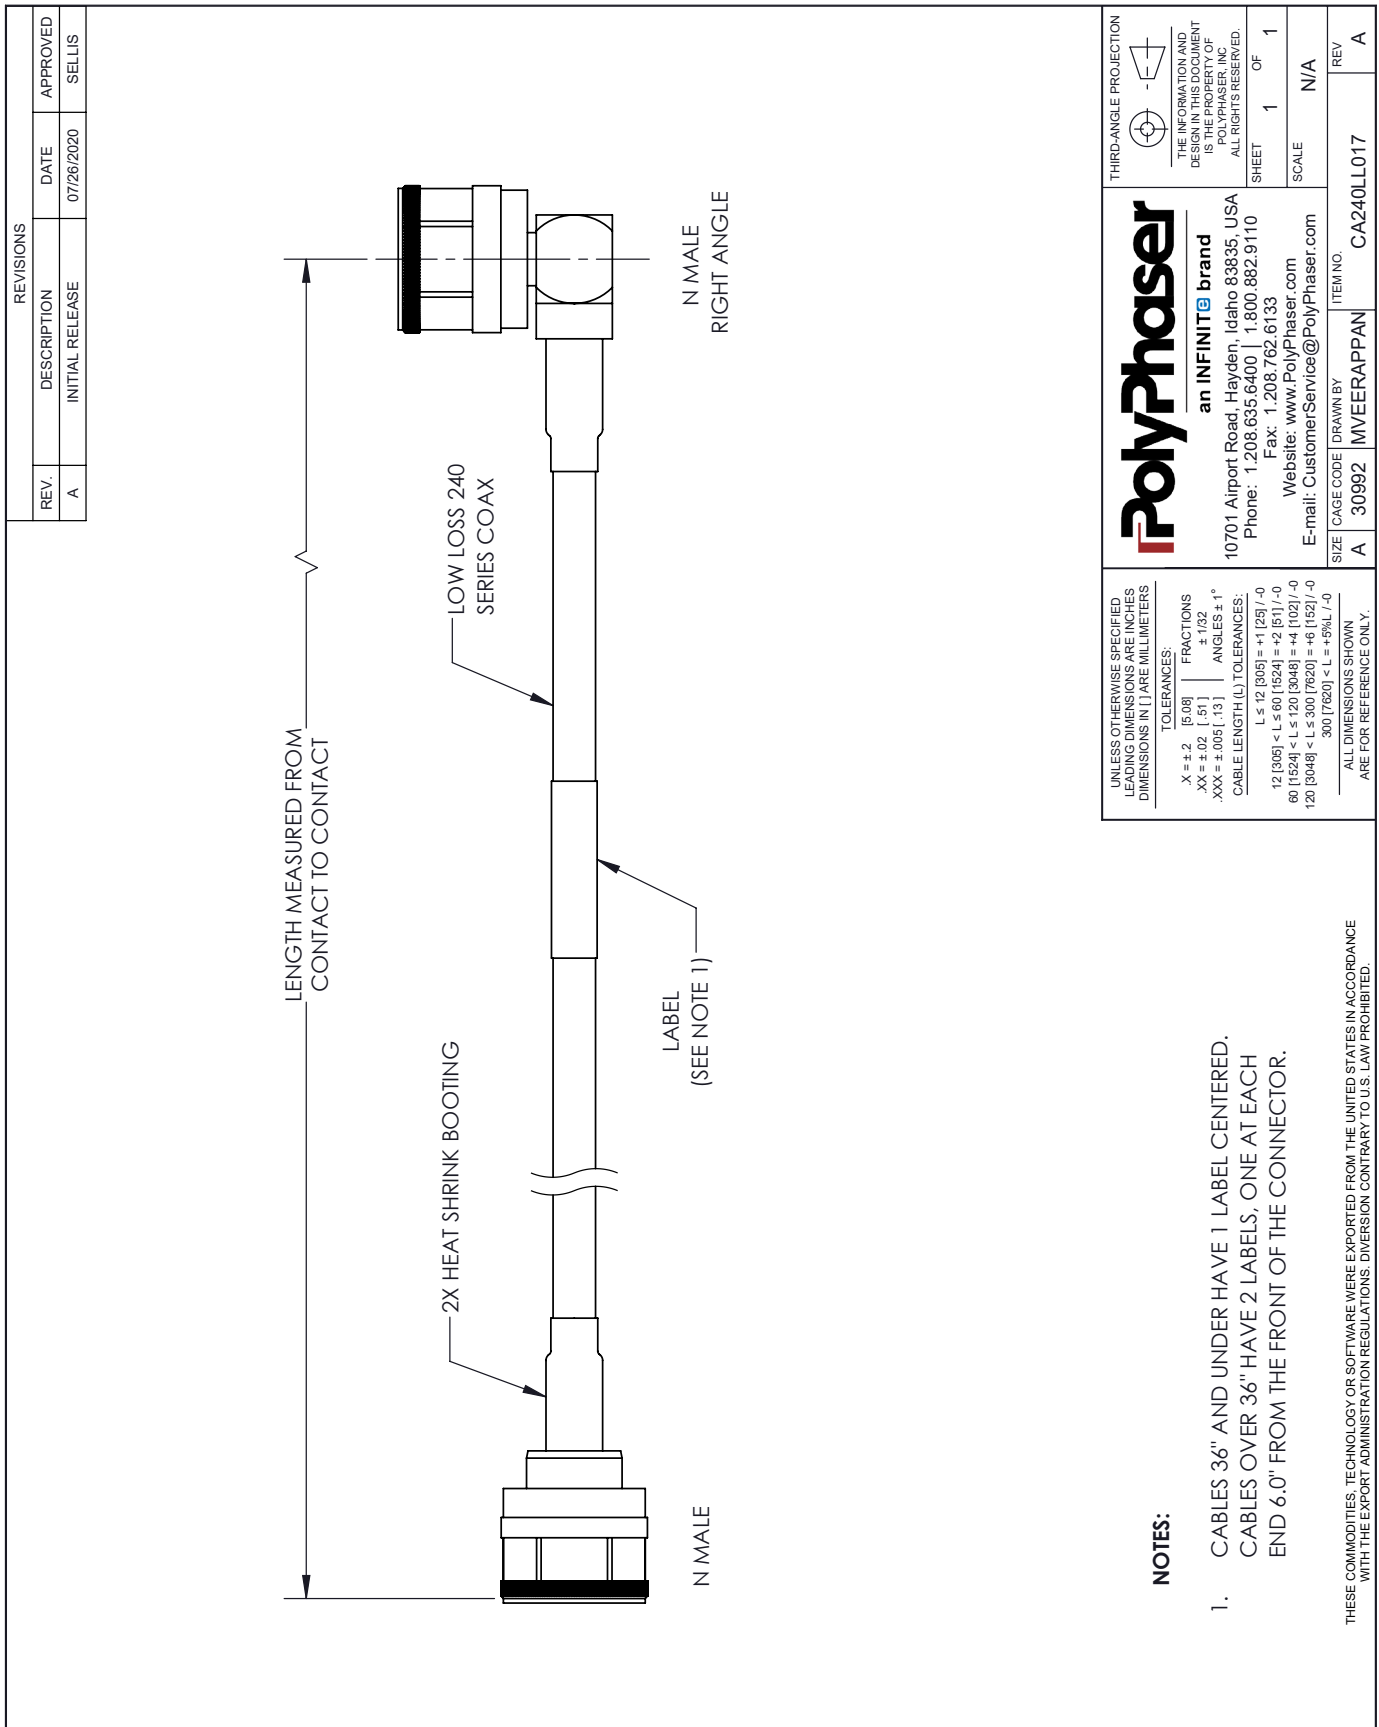

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/26/2020	SELLIS

PolyPhaser
an INFINITE brand

10701 Airport Road, Hayden, Idaho 83835, USA
Phone: 1.208.635.6400 | 1.800.882.9110
Fax: 1.208.762.6133
Website: www.PolyPhaser.com
E-mail: CustomerService@PolyPhaser.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF POLYPHASER. ALL RIGHTS RESERVED.

SHEET 1 OF 1
SCALE N/A

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = +2	[5.08]	FRACTIONS
.XX = +02	[.51]	+1/32
.XXX = +005	[.13]	ANGLES ±1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	±1 [25] / -0
12 [305] < L ≤ 60 [1524]	±2 [51] / -0
60 [1524] < L ≤ 120 [3048]	±4 [102] / -0
120 [3048] < L ≤ 300 [7620]	±6 [152] / -0
300 [7620] < L	±6% L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

SIZE CAGE CODE DRAWN BY ITEM NO.
A 30992 MVEERAPPAN CA240LL017

NOTES:

- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0' FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.