



2 FT 7/16 to 7/16 M/F Bulkhead 240 Series Low Loss Cable Jumper



CA240LL020-2FT

Configuration

- Connector 1: 7/16 DIN Male
- Connector 2: 7/16 DIN Female Bulkhead
- Cable Type: PPBC-240LL

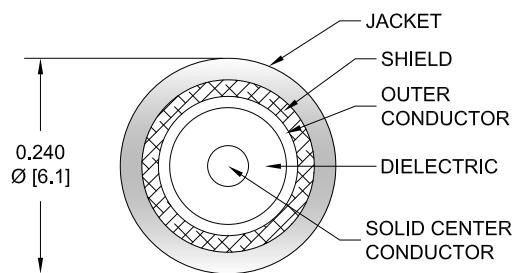

Features

- LMR Equivalent Coax
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Low Insertion Loss
- Double Shielded
- PE Jacket
- One Time Bend Radius of 0.75 Inches

Applications

- General Purpose
- Laboratory Use
- Antenna Installations
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

Description

PolyPhaser CA240LL020-2FT is a 2 FT 7/16 to 7/16 M/F Bulkhead 240 Series Low Loss Cable Jumper is built using high quality components by skilled technicians to ensure a reliable product. The 7/16 Male and 7/16 Female Bulkhead cable jumper connections are designed to industry standard interface dimensions to ensure superior performance. If you have an immediate need, these products are available to ship same day. Female bulkhead interfaces allow cables to be attached to a bracket to fix the cable and reduce unwanted movement. In addition, female bulkhead connectors are often used as an input/output to a piece of equipment or enclosure. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as military / defense, industrial / commercial, Wi-Fi, and many other RF systems. The CA240LL020-2FT 7/16 to 7/16 cable assembly is the perfect companion to PolyPhaser line of RF surge protection devices particularly when used as an antenna jumper cable.

The 240 Series coax used in these 7/16 to 7/16 assemblies is a 0.24 inch diameter coax with a black PE jacket. This cable's foam PE dielectric is low loss material with a phase velocity of 84% reducing the attenuation when compared to solid dielectric coax cables. PolyPhaser Low Loss 240 Series coax has a solid center conductor and uses a double shield comprised of a wire braid over a foil tape construction providing >90% shielding effectivity. The construction and materials of the CA240LL020-2FT result in a coax cable assembly with 0.75 inch one time bend radius and a repeat bend radius of 2.5 inches. The cable assembly's combination of 7/16 to 7/16 Male/Female Bulkhead and 240 Series Low Loss Cable supports a maximum operating frequency of 5.8 GHz. You can find detailed performance specifications in the product datasheet. Processes and procedures are in place to ensure products meet the published specifications.

For additional strength, these 7/16 Male to 7/16 Female Bulkhead cable assemblies have polyolefin heat shrink strain relief boots on both ends of the RF Cable Assembly Jumpers. The heat shrink booting uses a double walled epoxy filled material to prolong the life of the assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[2 FT 7/16 to 7/16 M/F Bulkhead 240 Series Low Loss Cable Jumper CA240LL020-2FT](#)

2 FT 7/16 to 7/16 M/F Bulkhead 240 Series Low Loss Cable Jumper



CA240LL020-2FT

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|-------------|---------|--------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.5:1 | |
| Velocity of Propagation | | 84 | | % |
| RF Shielding | 90 | | | dB |
| Capacitance | | 24.2 [79.4] | | pF/ft [pF/m] |
| Jacket Spark | | | 5,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|-----|------|-----|------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Max.) | 0.28 | 0.3 | 0.38 | 0.5 | 0.66 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Size

| | |
|----------|----------------------|
| Length | 24 in [609.6 mm] |
| Diameter | 0.24 in [6.1 mm] |
| Weight | 0.526 lbs [238.59 g] |

Cable

| | |
|--------------------------------------|---------------------|
| Cable Type | PPBC-240LL |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper |
| Dielectric Type | PE (F) |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |
| Jacket Material | PE, Black |
| Jacket Diameter | 0.24 in [6.1 mm] |
| One Time Minimum Bend Radius | 0.75 in [19.05 mm] |
| Repeated Minimum Bend Radius | 2.5 in [63.5 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[2 FT 7/16 to 7/16 M/F Bulkhead 240 Series Low Loss Cable Jumper CA240LL020-2FT](#)

2 FT 7/16 to 7/16 M/F Bulkhead 240 Series Low Loss Cable Jumper



CA240LL020-2FT

Connectors

| Description | Connector 1 | Connector 2 |
|-----------------------------------|------------------|--------------------------|
| Type | 7/16 DIN Male | 7/16 DIN Female Bulkhead |
| Specification | IEC 169-4 | |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Silver | Beryllium Copper, Silver |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Coupling Nut Material and Plating | Brass, Tri-Metal | |
| Hex Size | 1 1/4 inch | |

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 FT 7/16 to 7/16 M/F Bulkhead 240 Series Low Loss Cable Jumper CA240LL020-2FT](#)

URL: <https://www.polyphaser.com/2-ft-7-16-to-7-16-m-f-bulkhead-240-series-low-loss-cable-jumper-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

CA240LL020-2FT CAD Drawing

