

1 M TNC to TNC M/M Right Angle 240 Series Low Loss Cable Jumper

CA240LL027-1M




Configuration

- Connector 1: TNC Male
- Connector 2: TNC Male Right Angle
- Cable Type: PPBC-240LL

Features

- LMR Equivalent Coax
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Low Insertion Loss
- Double Shielded
- PE Jacket
- One Time Bend Radius of 0.75 Inches

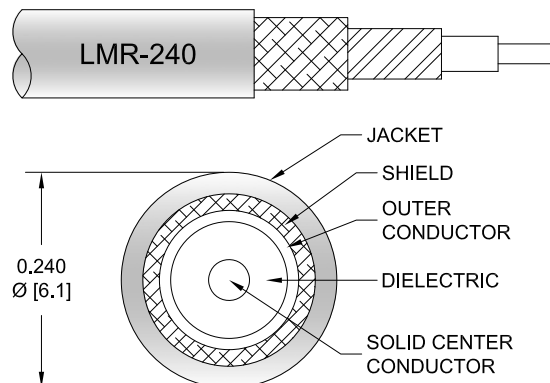

Applications

- General Purpose
- Laboratory Use
- Antenna Installations
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

Description

PolyPhaser CA240LL027-1M is a 1 meter TNC to TNC M/M Right Angle 240 Series Low Loss Cable Jumper is built using high quality components by skilled technicians to ensure a reliable product. The TNC Male and TNC Male Right Angle cable jumper connections are designed to industry standard interface dimensions to ensure superior performance. This product is in stock and available for same day shipping. The use of a right angle interface helps when attaching the cable assembly in tight spaces and can reduce strain on the cable/connector interface. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as Wi-Fi, communications systems, test and measurement, and many other RF systems. The CA240LL027-1M TNC to TNC cable assembly is the perfect companion to PolyPhaser line of RF surge protection devices particularly when used as an antenna jumper cable.

The 240 Series coax used in these TNC to TNC assemblies is a 0.24 inch diameter coax with a black PE jacket. This cable's foam PE dielectric is low loss material with a phase velocity of 84% reducing the attenuation when compared to solid dielectric coax cables. PolyPhaser Low Loss 240 Series coax has a solid center conductor and uses a double shield consisting of a wire braid over a foil tape construction providing >90% shielding effectivity. The construction and materials of the CA240LL027-1M result in a coax cable assembly with 0.75 inch one time bend radius and a repeat bend radius of 2.5 inches. The cable assembly's combination of TNC to TNC Male/Male Right Angle and 240 Series Low Loss Cable supports a maximum operating frequency of 5.8 GHz. You can find detailed performance specifications in the product datasheet. All PolyPhaser assemblies are tested and inspected prior to shipping.

For additional strength, these TNC Male to TNC Male Right Angle cable assemblies have polyolefin heat shrink strain relief boots on both ends of the RF Cable Assembly Jumpers. The heat shrink booting uses a double walled epoxy filled material to prolong the life of the assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[1 M TNC to TNC M/M Right Angle 240 Series Low Loss Cable Jumper CA240LL027-1M](#)

1 M TNC to TNC M/M Right Angle 240 Series Low Loss Cable Jumper

CA240LL027-1M



Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.5:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Jacket Spark			5,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Max.)	1.88	2.27	3.85	6.21	9.36	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. Insertion Loss is estimated as 0.1 dB per connector and 0.2 dB per right angle connector.

Mechanical Specifications

Size

Length	39.37 in [100 cm]
Diameter	0.24 in [6.1 mm]
Weight	0.18243 lbs [82.75 g]

Cable

Cable Type	PPBC-240LL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.752 in [19.1 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[1 M TNC to TNC M/M Right Angle 240 Series Low Loss Cable Jumper CA240LL027-1M](#)

1 M TNC to TNC M/M Right Angle 240 Series Low Loss Cable Jumper

CA240LL027-1M



Connectors

Description	Connector 1	Connector 2
Type	TNC Male	TNC Male Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	Delrin	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating		Brass, Nickel

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 M TNC to TNC M/M Right Angle 240 Series Low Loss Cable Jumper CA240LL027-1M](https://www.polyphaser.com/1-m-tnc-to-tnc-m-m-right-angle-240-series-low-loss-cable-jumper-p.aspx)

URL: <https://www.polyphaser.com/1-m-tnc-to-tnc-m-m-right-angle-240-series-low-loss-cable-jumper-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

1 M TNC to TNC M/M Right Angle 240 Series Low Loss Cable Jumper

CA240LL027-1M CAD Drawing

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/26/2020	SELLIS

LENGTH MEASURED FROM CONTACT TO CONTACT

LOW LOSS 240 SERIES COAX

2X HEAT SHRINK BOOTING

TNC MALE

TNC MALE RIGHT ANGLE

LABEL (SEE NOTE 1)

NOTES:

1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0" FROM THE FRONT OF THE CONNECTOR.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = +2	[5.08]	FRACTIONS
.XX = ±.02	[.51]	±1/32
.XXX = ±.005	[.13]	ANGLES ±1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	±.1 [25]	/-0
12 [305] < L ≤ 60 [1524]	±.2 [51]	/-0
60 [1524] < L ≤ 120 [3048]	±.4 [102]	/-0
120 [3048] < L ≤ 300 [7620]	±.6 [152]	/-0
300 [7620] < L	±.6% L	/-0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PolyPhaser
an INFINITE brand

10701 Airport Road, Hayden, Idaho 83835, USA
Phone: 1.208.635.6400 | 1.800.882.9110
Fax: 1.208.762.6133
Website: www.PolyPhaser.com
E-mail: CustomerService@PolyPhaser.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF POLYPHASER. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	30992	MVEERAPPAN	CA240LL027	A