


100 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper



CA400LL004-100FT


Configuration

- Connector 1: N Male
- Connector 2: N Male Right Angle
- Cable Type: PPBC-400LL



Features

- LMR Equivalent Coax
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Low Insertion Loss
- Double Shielded
- PE Jacket
- One Time Bend Radius of 1 Inch

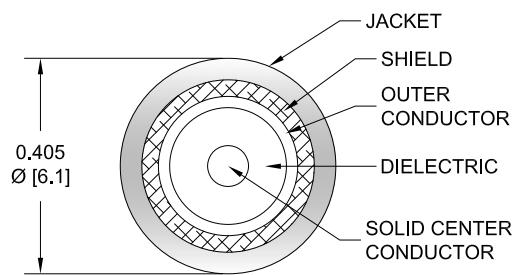

Applications

- General Purpose
- Laboratory Use
- Antenna Installations
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

Description

PolyPhaser CA400LL004-100FT is a 100 foot Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper is built using high quality components by skilled technicians to ensure a reliable product. The Type N Male and Type N Male Right Angle cable jumper connections are designed to industry standard interface dimensions to ensure superior performance. All of these products are available for same day shipment to fulfill your urgent needs. The use of a right angle interface helps when attaching the cable assembly in tight spaces and can reduce strain on the cable/connector interface. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as Wireless Lan, LMR, cellular, and many other applications. The CA400LL004-100FT Type N to Type N cable assembly is the perfect companion to PolyPhaser line of RF surge protection devices particularly when used as an antenna jumper cable.

The 400 Series coax used in these Type N to Type N assemblies is a 0.4" diameter coax with a black Polyethylene jacket. This cable's foam Polyethylene dielectric is low loss material with a VoP of 85% reducing the attenuation when compared to solid dielectric coax cables. PolyPhaser Low Loss 400 Series coax has a solid center conductor and uses a double shield comprised of a wire braid over a foil tape construction providing shielding >90%. The construction and materials of the CA400LL004-100FT result in a coax cable assembly with a one inch one time bend radius and a repeat bend radius of four inches. The cable assembly's combination of Type N to Type N (M)/(MRA) and 400 Series Low Loss Cable supports a maximum operating frequency of 5.8 GHz. Detailed specifications for this configuration includes layout drawings and key performance specifications. This product is built and tested by our expert technicians to fulfill your cable assembly needs.

Polyolefin heat shrink strain relief boots add additional strength on both ends of this 100 foot assembly. This epoxy filled heat shrink will extend the life of these assemblies by distributing the stresses applied to the connector/coax attachment.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[100 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper CA400LL004-100FT](#)

100 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper



CA400LL004-100FT

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.3:1 | |
| Velocity of Propagation | | 85 | | % |
| RF Shielding | 90 | | | dB |
| Capacitance | | 23.9 [78.41] | | pF/ft [pF/m] |
| Operating Voltage (AC) | | | 1,500 | Vrms |
| Jacket Spark | | | 8,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|-------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Max.) | 2.35 | 3.35 | 5.35 | 8.35 | 12.35 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. Insertion Loss is estimated as 0.15 dB per connector and 0.2 dB per right angle connector.

Mechanical Specifications

Size

| | |
|----------|---------------------|
| Length | 1,200 in [30.48 m] |
| Diameter | 0.405 in [10.29 mm] |
| Weight | 6.58 lbs [2.98 Kg] |

Cable

| | |
|--------------------------------------|---------------------|
| Cable Type | PPBC-400LL |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper |
| Dielectric Type | PE (F) |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |
| Jacket Material | PE, Black |
| Jacket Diameter | 0.405 in [10.29 mm] |
| Repeated Minimum Bend Radius | 4 in [101.6 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[100 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper CA400LL004-100FT](#)

100 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper



CA400LL004-100FT

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|----------------------|---------------------|
| Type | N Male | N Male Right Angle |
| Specification | MIL-STD-348A | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Mating Cycles | | 500 |
| Contact Material and Plating | Brass, Silver | Brass, Gold |
| Contact Plating Specification | 70 μ in minimum | 30 μ in minimum |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Nickel | Brass, Tri-Metal |
| Body Plating Specification | 100 μ in minimum | |
| Coupling Nut Material and Plating | Brass, Nickel | Brass, Tri-Metal |
| Coupling Nut Plating Specification | 100 μ in minimum | |

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [100 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper CA400LL004-100FT](#)

URL: <https://www.polyphaser.com/100-ft-type-n-to-type-n-m-m-right-angle-400-series-low-loss-cable-jumper-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

100 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper

CA400LL004-100FT CAD Drawing

