



2 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper



CA400LL004-2FT

Configuration

- Connector 1: N Male
- Connector 2: N Male Right Angle
- Cable Type: PPBC-400LL

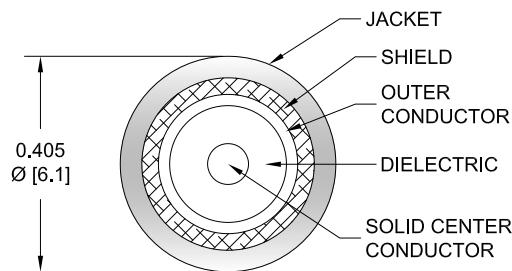

Features

- LMR Equivalent Coax
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Low Insertion Loss
- Double Shielded
- PE Jacket
- One Time Bend Radius of 1 Inch

Applications

- General Purpose
- Laboratory Use
- Antenna Installations
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

Description

PolyPhaser CA400LL004-2FT is a 2 foot Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper is built using high quality components by skilled technicians to ensure a reliable product. The Type N Male and Type N Male Right Angle cable jumper connections are designed to industry standard interface dimensions to ensure superior performance. All of these products are available for same day shipment to fulfill your urgent needs. The use of a right angle interface helps when attaching the cable assembly in tight spaces and can reduce strain on the cable/connector interface. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as Wireless Lan, LMR, cellular, and many other applications. The CA400LL004-2FT Type N to Type N cable assembly is the perfect companion to PolyPhaser line of RF surge protection devices particularly when used as an antenna jumper cable.

The 400 Series coax used in these Type N to Type N assemblies is a 0.4" diameter coax with a black Polyethylene jacket. This cable's foam Polyethylene dielectric is low loss material with a VoP of 85% reducing the attenuation when compared to solid dielectric coax cables. PolyPhaser Low Loss 400 Series coax has a solid center conductor and uses a double shield comprised of a wire braid over a foil tape construction providing shielding >90%. The construction and materials of the CA400LL004-2FT result in a coax cable assembly with a one inch one time bend radius and a repeat bend radius of four inches. The cable assembly's combination of Type N to Type N (M)/(MRA) and 400 Series Low Loss Cable supports a maximum operating frequency of 5.8 GHz. Detailed specifications for this configuration includes layout drawings and key performance specifications. This product is built and tested by our expert technicians to fulfill your cable assembly needs.

Polyolefin heat shrink strain relief boots add additional strength on both ends of this 2 foot assembly. This epoxy filled heat shrink will extend the life of these assemblies by distributing the stresses applied to the connector/coax attachment.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
2 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper CA400LL004-2FT

2 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper



CA400LL004-2FT

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.3:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Operating Voltage (AC)			1,500	Vrms
Jacket Spark			8,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Max.)	0.39	0.41	0.45	0.51	0.59	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. Insertion Loss is estimated as 0.15 dB per connector and 0.2 dB per right angle connector.

Mechanical Specifications

Size

Length	24 in [609.6 mm]
Diameter	0.405 in [10.29 mm]
Weight	0.308 lbs [139.71 g]

Cable

Cable Type	PPBC-400LL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.405 in [10.29 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[2 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper CA400LL004-2FT](#)

2 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper


CA400LL004-2FT
Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Mating Cycles		500
Contact Material and Plating	Brass, Silver	Brass, Gold
Contact Plating Specification	70 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Tri-Metal
Body Plating Specification	100 μ in minimum	
Coupling Nut Material and Plating	Brass, Nickel	Brass, Tri-Metal
Coupling Nut Plating Specification	100 μ in minimum	

Environmental Specifications
Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications
Plotted and Other Data

Notes:

- Values at 25°C, sea level.

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper CA400LL004-2FT](#)

URL: <https://www.polyphaser.com/2-ft-type-n-to-type-n-m-m-right-angle-400-series-low-loss-cable-jumper-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

2 FT Type N to Type N M/M Right Angle 400 Series Low Loss Cable Jumper

CA400LL004-2FT CAD Drawing

