

1 M TNC to TNC M/M 400 Series Low Loss Cable Jumper

CA400LL012-1M




Configuration

- Connector 1: TNC Male
- Connector 2: TNC Male
- Cable Type: PPBC-400LL

Features

- LMR Equivalent Coax
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Low Insertion Loss
- Double Shielded
- PE Jacket
- One Time Bend Radius of 1 Inch

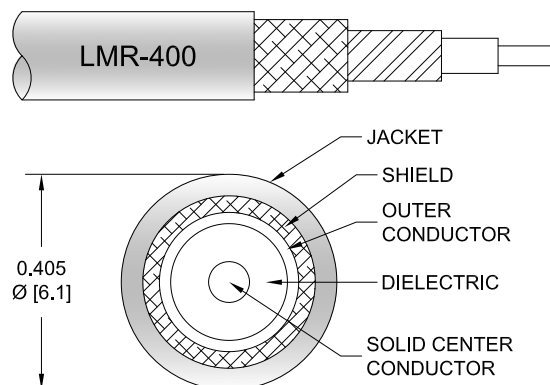

Applications

- General Purpose
- Laboratory Use
- Antenna Installations
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

Description

PolyPhaser CA400LL012-1M is a 1 meter TNC to TNC M/M 400 Series Low Loss Cable Jumper is built using high quality components by skilled technicians to ensure a reliable product. The TNC M cable jumper connections are designed to industry standard interface dimensions to ensure superior performance. All of these products are available for same day shipment to fulfill your urgent needs. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as IoT network, military / defense, laboratory test and measurement, and many other applications. The CA400LL012-1M TNC to TNC cable assembly is the perfect companion to PolyPhaser line of RF surge protection devices particularly when used as an antenna jumper cable.

The 400 Series coax used in these TNC to TNC assemblies is a 0.4 inch diameter coax with a black PE jacket. This cable's foam PE dielectric is low loss material with a VoP of 85% reducing the attenuation when compared to solid dielectric coax cables. PolyPhaser Low Loss 400 Series coax has a solid center conductor and uses a double shield consisting of a wire braid over a foil tape construction providing >90% shielding effectivity. The construction and materials of the CA400LL012-1M result in a coax cable assembly with 1 inch one time bend radius and a repeat bend radius of 4 inches. The cable assembly's combination of TNC to TNC M/M and 400 Series Low Loss Cable supports a maximum operating frequency of 5800 MHz. Detailed specifications for this configuration includes layout drawings and performance and material specifications. This product is built and tested by our expert technicians to fulfill your cable assembly needs.

Polyolefin heat shrink strain relief boots add additional strength on both ends of this 1 meter assembly. These epoxy filled heat shrinks provide strain relief to help prevent damage from over-bending the assembly ends.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[1 M TNC to TNC M/M 400 Series Low Loss Cable Jumper CA400LL012-1M](#)

1 M TNC to TNC M/M 400 Series Low Loss Cable Jumper



CA400LL012-1M

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.03		5.8	GHz
VSWR			1.5:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Capacitance		24 [78.74]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms
Jacket Spark			8,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Max.)	0.99	1.39	2.17	3.35	4.93	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Size

Length	39.37 in [100 cm]
Diameter	0.405 in [10.29 mm]
Weight	0.34397 lbs [156.02 g]

Cable

Cable Type	PPBC-400LL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.4 in [10.16 mm]

One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[1 M TNC to TNC M/M 400 Series Low Loss Cable Jumper CA400LL012-1M](#)

1 M TNC to TNC M/M 400 Series Low Loss Cable Jumper



CA400LL012-1M

Bending Moment	0.5 lbs-ft [0.68 N-m]
Tensile Strength	160 lbs [72.57 Kg]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male	TNC Male
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Brass, Silver
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
-----------------	------------------

Compliance Certifications

Plotted and Other Data

Notes:

- Values at 25°C, sea level.


PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 M TNC to TNC M/M 400 Series Low Loss Cable Jumper CA400LL012-1M](#)

URL: <https://www.polyphaser.com/1-m-tnc-to-tnc-m-m-400-series-low-loss-cable-jumper-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

CA400LL012-1M CAD Drawing

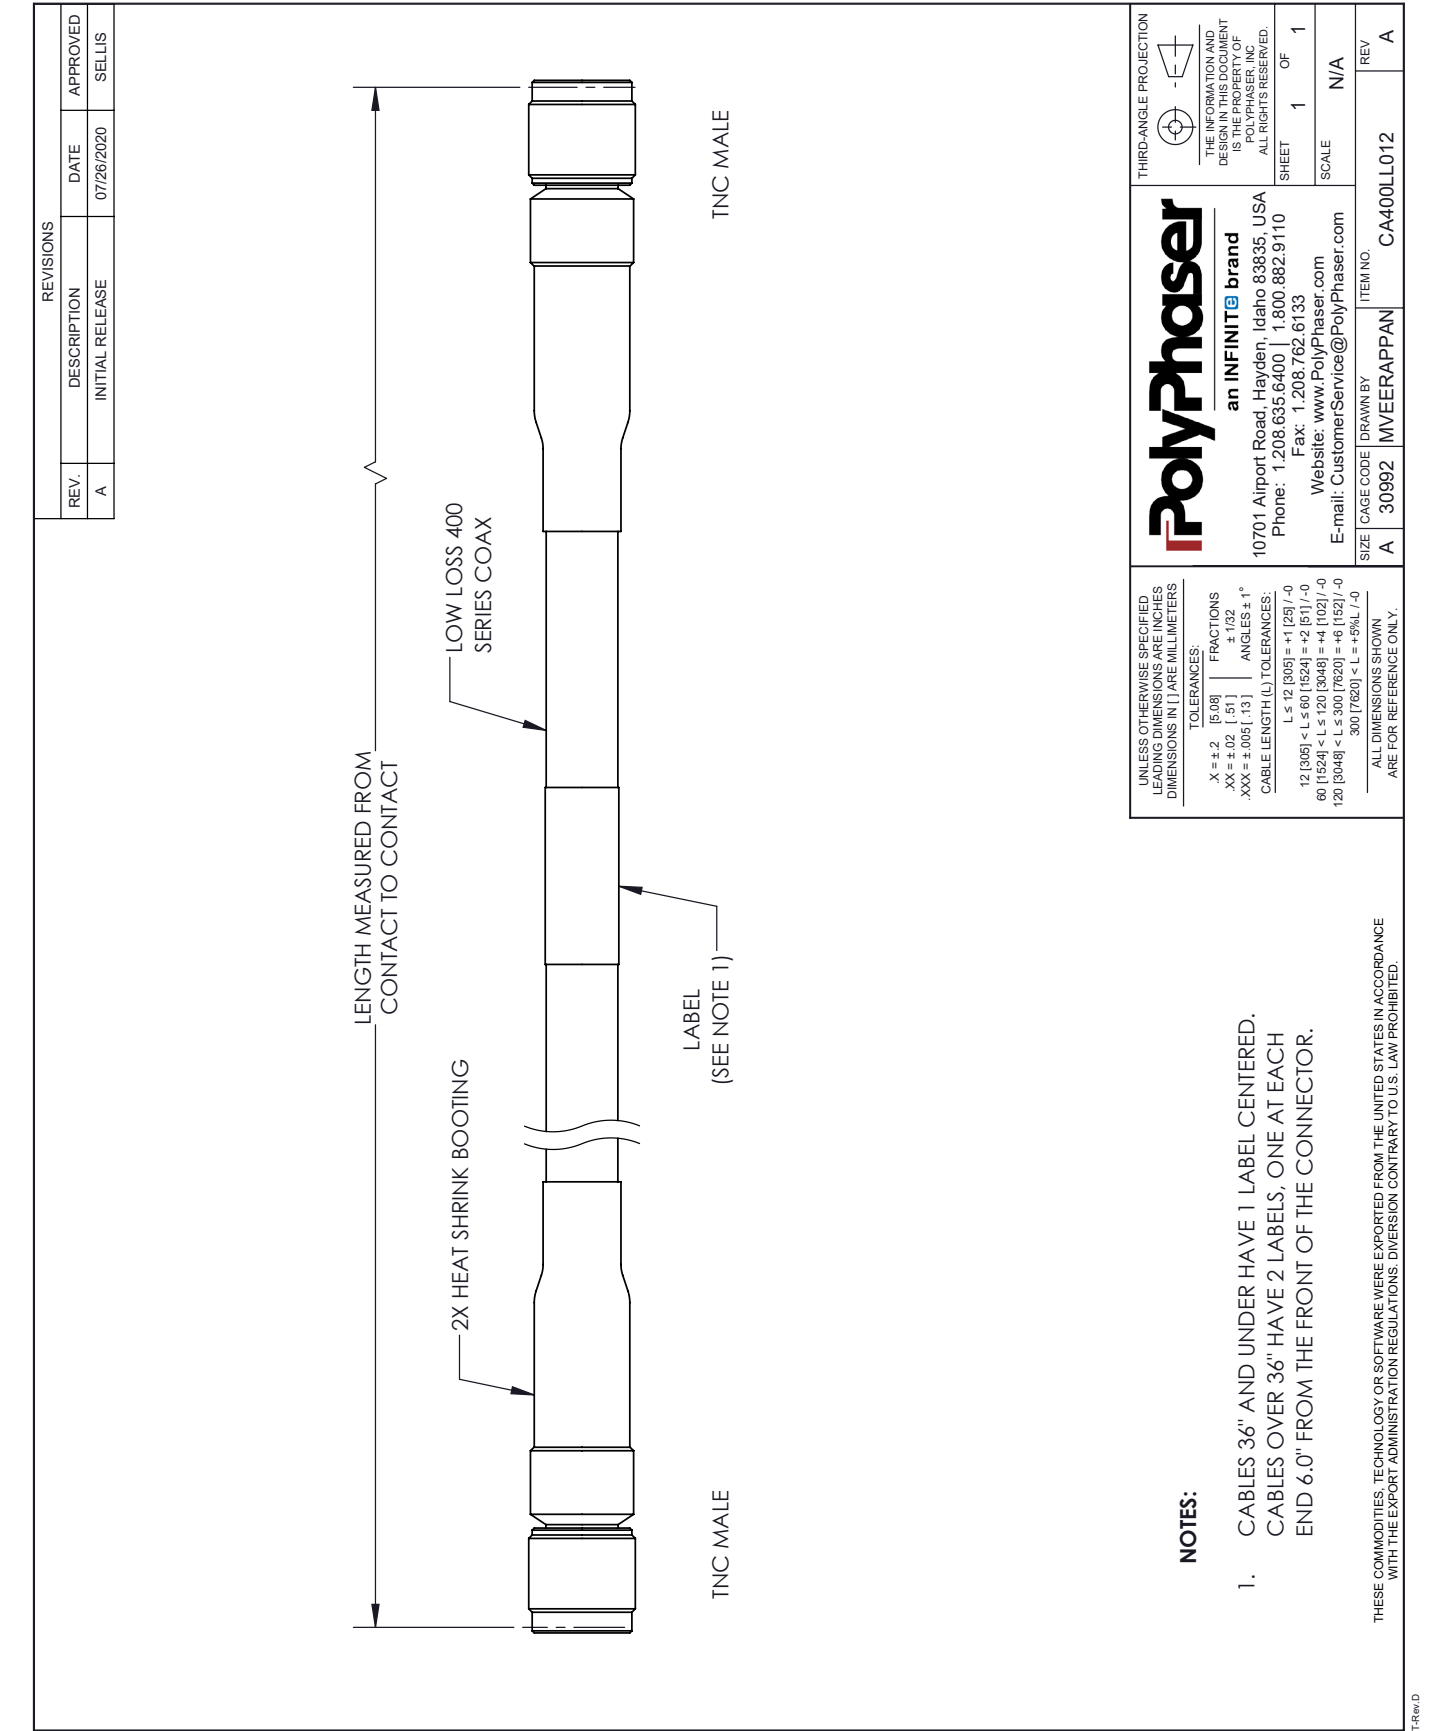

NOTES:

1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

CA400LL012-1M REV 1 | © 2020 Infinite Electronics, Inc. PolyPhaser is a registered trademark of Infinite Electronics, Inc.

+1 800 882 9110 | PolyPhaser.com