

2 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-250-LLPL Low PIM Cable Jumper

## CASPP250LLPL001-2FT




### Configuration

- Connector 1: 4.3-10 Male
- Connector 2: 7/16 DIN Male
- Cable Type: SPP-250-LLPL

### Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- UL 910 Plenum Rated
- FEP Jacket
- Shielding Effectivity > 100 dB
- 100% Tested with PIM Test Results Marked on Cable
- 1.25 Inch Minimum Bend Radius
- Low Loss with Excellent VSWR

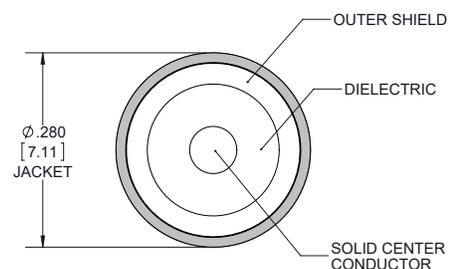

### Applications

- Distributed Antennas Systems (DAS)
- Plenum Installations
- Low PIM Applications
- Multi-Carrier Communication Systems

### Description

PolyPhaser CASPP250LLPL001-2FT is a 2 FT Plenum Rated 4.3-10 to 4.3-10 M Right Angle/M Right Angle SPP-250-LLPL Low PIM Cable Jumper built using high quality components by skilled technicians to ensure a reliable product. The 4.3-10 Male Right Angle to 4.3-10 Male Right Angle jumper connections are designed to industry standard interface dimensions to ensure superior performance. These low PIM corrugated cable assemblies are durable and plenum rated for applications that require these parameters. All PolyPhaser cable assemblies are available for same day shipment to fulfill your urgent needs. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as plenum installations, low PIM applications, distributed antenna systems (DAS), and many other RF systems. The CASPP250LLPL001-2FT 4.3-11 to 4.3-11 low PIM cable assembly is the perfect companion to PolyPhaser line of products, particularly when used as an antenna jumper.

The quarter inch low PIM plenum rated coax used in these 4.3-11 to 4.3-11 assemblies is a .250 inch diameter copper corrugated coax with a blue FEP jacket. This cable's PTFE dielectric is low loss material with a phase velocity of 76% and offers excellent passive intermodulation (PIM) performance better than -160 dBc. The construction of the quarter inch copper corrugated jumper results in a minimum bend radius of 1.25 inches. The cable assembly's combination of 4.3-11 to 4.3-11 M Right Angle/M Right Angle and Times Microwave's SPP-250-LLPL low PIM plenum rated cable supports a maximum operation frequency of 5.8 GHz. Each cable assembly is installed with heat shrink booting on each end and a PIM label with the measured PIM level. You can find detailed performance specifications in the product datasheet. All PolyPhaser assemblies are tested and inspected prior to shipping.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[2 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-250-LLPL Low PIM Cable Jumper CASPP250LLPL001-2FT](#)

2 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-250-LLPL Low PIM Cable Jumper



**CASPP250LLPL001-2FT**

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	100			dB
Passive Intermodulation			-160	dBc
Capacitance		27 [88.58]		pF/ft [pF/m]
Inductance		0.067 [0.22]		uH/ft [uH/m]
DC Resistance Inner Conductor		3 [9.84]		Ω/1000ft [Ω/Km]
Operating Voltage (AC)			750	Vrms

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.45	0.7	1	2.5	5.8	GHz
Insertion Loss (Max.)	0.28	0.29	0.31	0.39	0.5	dB

Electrical Specification Notes:

PIM test results vary between cables

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1dB of connector loss.

**Mechanical Specifications**

**Size**

Length 24 in [609.6 mm]

Weight 0.39 lbs [176.9 g]

**Cable**

Cable Type SPP-250-LLPL

Impedance 50 Ohms

Inner Conductor Type Solid

Inner Conductor Material and Plating Copper, Bare

Dielectric Type PTFE

Number of Shields 1

Shield Layer 1 Helically Corrugated Copper Tube

Outer Conductor Material and Plating Copper

Outer Conductor Diameter 0.25 in [6.35 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[2 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-250-LLPL Low PIM Cable Jumper CASPP250LLPL001-2FT](#)

2 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-250-LLPL Low PIM Cable Jumper



## CASPP250LLPL001-2FT

Jacket Material	FEP, Blue
Jacket Diameter	0.28 in [7.11 mm]
One Time Minimum Bend Radius	1.25 in [31.75 mm]

### Connectors

Description	Connector 1	Connector 2
Type	4.3-10 Male	7/16 DIN Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Brass, Silver
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Seal Gasket Material	Silicone Rubber	

### Environmental Specifications

#### Temperature

Operating Range	-55 to +200 deg C
Storage Range	-55 to +200 deg C
Plenum Rating	UL910

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[2 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-250-LLPL Low PIM Cable Jumper CASPP250LLPL001-2FT](#)

2 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-250-LLPL Low PIM Cable Jumper

## CASPP250LLPL001-2FT



### Compliance Certifications

#### Plotted and Other Data

Notes:

- Values at 25°C, sea level.


PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-250-LLPL Low PIM Cable Jumper CASPP250LLPL001-2FT](#)

URL: <https://www.polyphaser.com/2-ft-plenum-rated-43-10-to-7-16-din-m-m-spp-250-llpl-low-pim-cable-jumper-caspp250llpl001-2ft-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

CASPP250LLPL001-2FT CAD Drawing

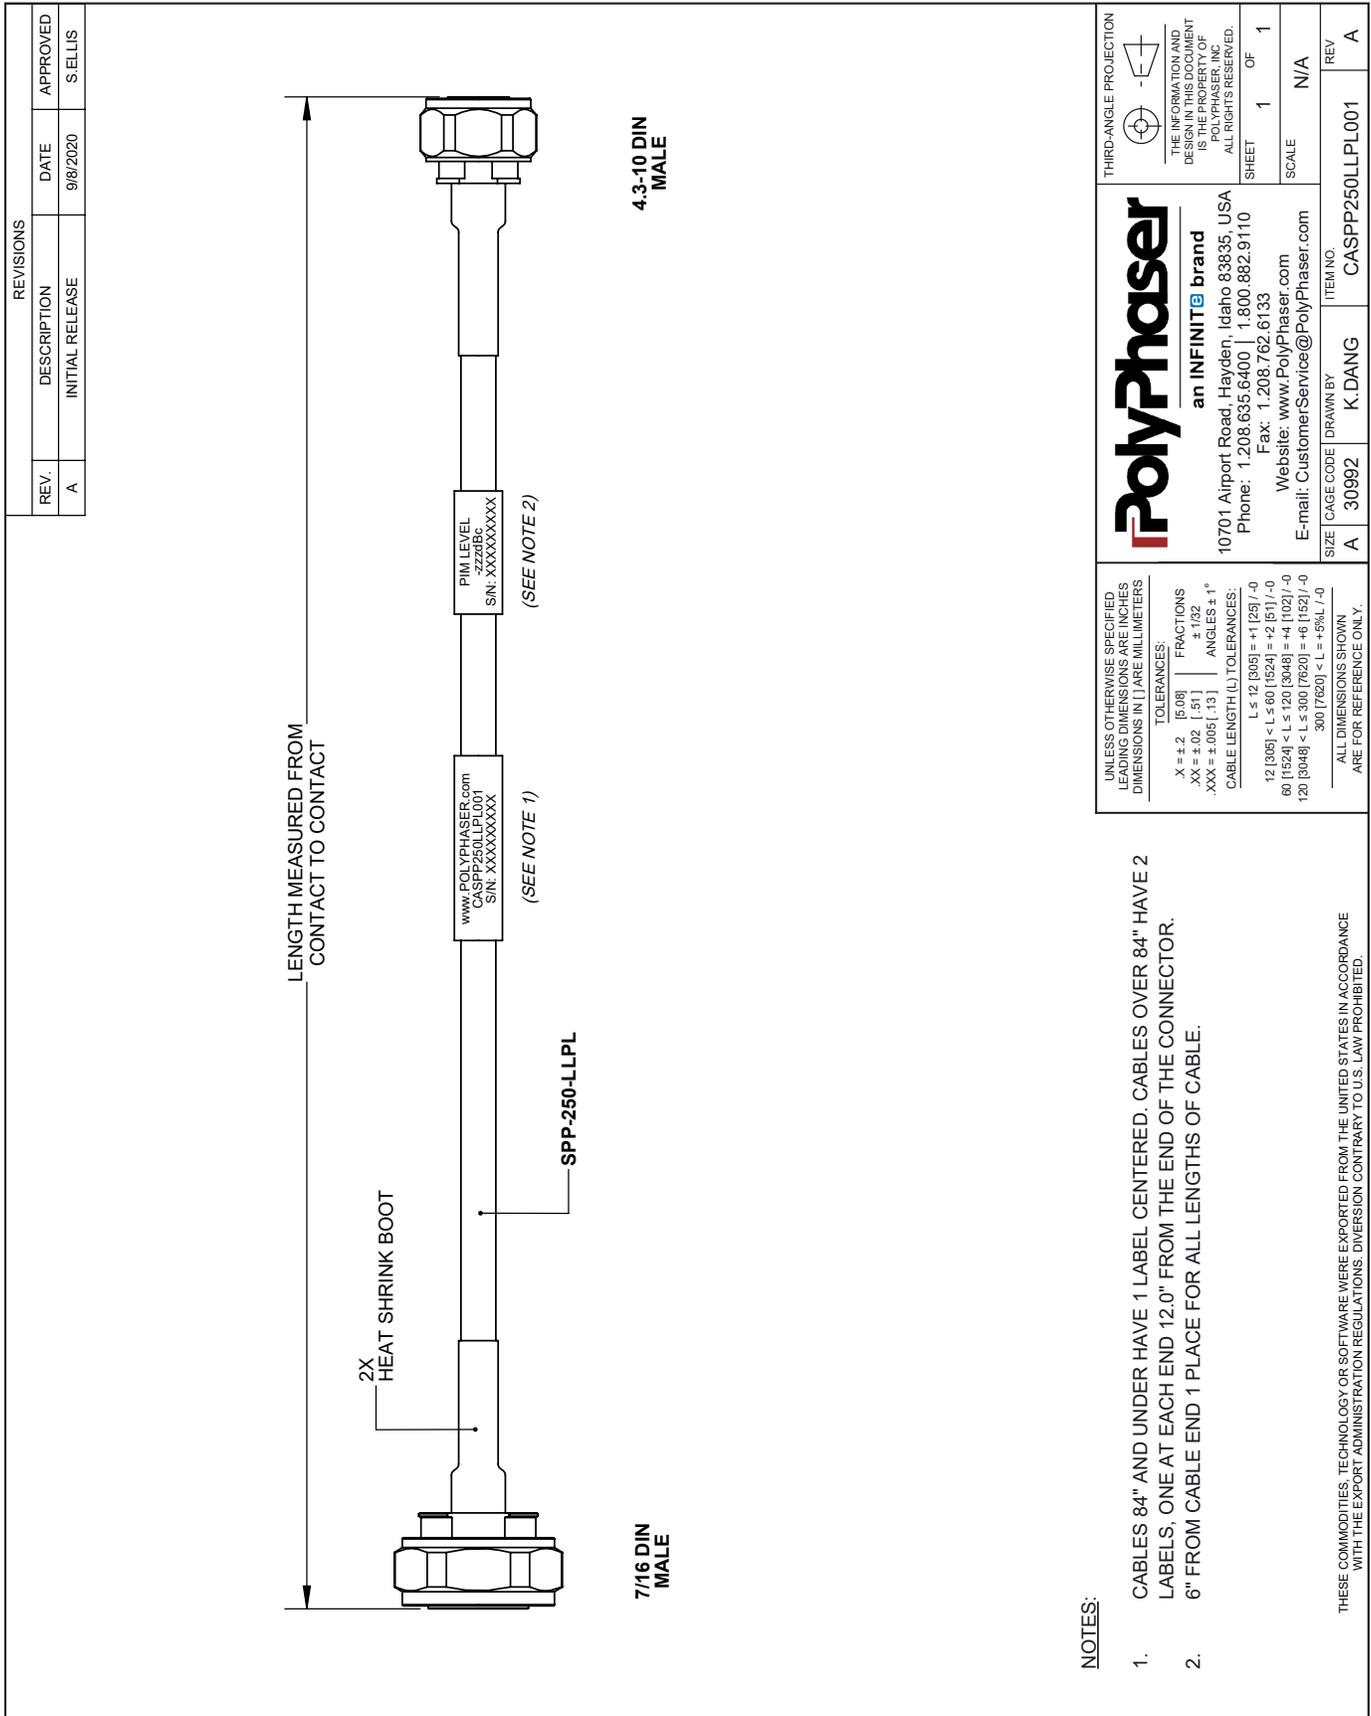

NOTES:

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE END OF THE CONNECTOR.
2. 6" FROM CABLE END 1 PLACE FOR ALL LENGTHS OF CABLE.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <p>X = +2 [ 5.08 ]      FRACTIONS      +1/32</p> <p>.XX = +0.2 [ .51 ]      ANGLES ±1°</p> <p>.XXX = +0.005 [ .13 ]</p> <p>CABLE LENGTH (L) TOLERANCES:</p> <p>L ≤ 12 [305] = +1 [25] / -0</p> <p>12 [305] &lt; L ≤ 60 [1524] = +2 [51] / -0</p> <p>60 [1524] &lt; L ≤ 120 [3048] = +4 [102] / -0</p> <p>120 [3048] &lt; L ≤ 300 [7620] = +6 [152] / -0</p> <p>300 [7620] &lt; L = +6%L / -0</p> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>		<p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF POLYPHASER, INC. ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p>	
<p><b>PolyPhaser</b> an INFINITE brand</p> <p>10701 Airport Road, Hayden, Idaho 83835, USA Phone: 1.208.635.6400   1.800.882.9110 Fax: 1.208.762.6133 Website: www.PolyPhaser.com E-mail: CustomerService@PolyPhaser.com</p>		<p>ITEM NO. CASPP250LLPL001</p>	<p>REV A</p>
<p>REV. A</p>	<p>DESCRIPTION INITIAL RELEASE</p>	<p>DATE 9/8/2020</p>	<p>APPROVED S.ELLIS</p>