

10 FT Plenum Rated 4.3-10 to Type N F/M SPP-250-LLPL Low PIM Cable Jumper




CASPP250LLPL041-10FT

Configuration

- Connector 1: 4.3-10 Female
- Connector 2: N Male
- Cable Type: SPP-250-LLPL

Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- UL 910 Plenum Rated
- FEP Jacket
- Shielding Effectivity > 100 dB
- 100% Tested with PIM Test Results Marked on Cable
- 1.25 Inch Minimum Bend Radius
- Low Loss with Excellent VSWR

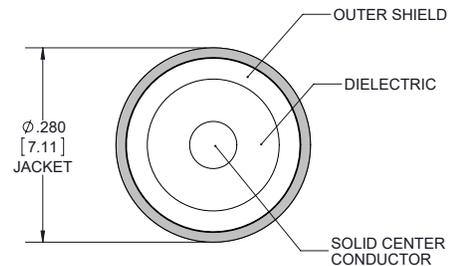

Applications

- Distributed Antennas Systems (DAS)
- Low PIM Applications
- Plenum Installations
- Multi-Carrier Communication Systems

Description

PolyPhaser CASPP250LLPL041-10FT is a 10 FT Plenum Rated 4.3-10 to Type N F/M SPP-250-LLPL Low PIM Cable Jumper built using high quality components by skilled technicians to ensure a reliable product. The 4.3-10 Female to Type N Male jumper connections are designed to industry standard interface dimensions to ensure superior performance. These low PIM corrugated cable assemblies are durable and plenum rated for applications that require these parameters. All PolyPhaser cable assemblies are available for same day shipment to fulfill your urgent needs. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as plenum installations, low PIM applications, distributed antenna systems (DAS), and many other RF systems. The CASPP250LLPL041-10FT 4.3-14 to Type N low PIM cable assembly is the perfect companion to PolyPhaser line of products, particularly when used as an antenna jumper.

The quarter inch low PIM plenum rated coax used in these 4.3-14 to Type N assemblies is a .250 inch diameter copper corrugated coax with a blue FEP jacket. This cable's PTFE dielectric is low loss material with a phase velocity of 76% and offers excellent passive intermodulation (PIM) performance better than -160 dBc. The construction of the quarter inch copper corrugated jumper results in a minimum bend radius of 1.25 inches. The cable assembly's combination of 4.3-14 to Type N F/M and Times Microwave's SPP-250-LLPL low PIM plenum rated cable supports a maximum operation frequency of 5.8 GHz. Each cable assembly is installed with heat shrink booting on each end and a PIM label with the measured PIM level. You can find detailed performance specifications in the product datasheet. All PolyPhaser assemblies are tested and inspected prior to shipping.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[10 FT Plenum Rated 4.3-10 to Type N F/M SPP-250-LLPL Low PIM Cable Jumper CASPP250LLPL041-10FT](#)

10 FT Plenum Rated 4.3-10 to Type N F/M SPP-250-LLPL Low PIM Cable Jumper



CASPP250LLPL041-10FT

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 76 | | % |
| RF Shielding | 100 | | | dB |
| Passive Intermodulation | | -165 | -160 | dBc |
| Capacitance | | 27 [88.58] | | pF/ft [pF/m] |
| Inductance | | 0.067 [0.22] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 3 [9.84] | | Ω/1000ft [Ω/Km] |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 0.45 | 0.7 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Max.) | 0.51 | 0.64 | 0.76 | 1.25 | 1.96 | dB |

Electrical Specification Notes:

PIM test results vary between cables

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of $0.1 \cdot \sqrt{\text{FGHz}}$ dB per connector.

Mechanical Specifications

Size

| | |
|----------|---------------------|
| Length | 120 in [304.8 cm] |
| Diameter | 0.94 in [23.88 mm] |
| Weight | 0.91 lbs [412.77 g] |

Cable

| | |
|--------------------------------------|----------------------------------|
| Cable Type | SPP-250-LLPL |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper, Bare |
| Dielectric Type | PTFE |
| Number of Shields | 1 |
| Shield Layer 1 | Helically Corrugated Copper Tube |
| Outer Conductor Material and Plating | Copper |
| Outer Conductor Diameter | 0.25 in [6.35 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[10 FT Plenum Rated 4.3-10 to Type N F/M SPP-250-LLPL Low PIM Cable Jumper CASPP250LLPL041-10FT](#)

10 FT Plenum Rated 4.3-10 to Type N F/M SPP-250-LLPL Low PIM Cable Jumper



CASPP250LLPL041-10FT

| | |
|------------------------------|-----------------------|
| Jacket Material | FEP, Blue |
| Jacket Diameter | 0.28 in [7.11 mm] |
| One Time Minimum Bend Radius | 1.25 in [31.75 mm] |
| Bending Moment | 0.8 lbs-ft [1.08 N-m] |

Connectors

| Description | Connector 1 | Connector 2 |
|---------------------------------------|-------------------------|-------------------------|
| Type | 4.3-10 Female | N Male |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Phosphor Bronze, Silver | Phosphor Bronze, Silver |
| Contact Plating Specification | 200 µin | 196 µin |
| Dielectric Type | PTFE | PTFE |
| Outer Conductor Material and Plating | Brass, Tri-Metal | |
| Outer Conductor Plating Specification | 80 µin | |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Body Plating Specification | 80 µin | 118 µin |
| Coupling Nut Material and Plating | | Brass, Tri-Metal |
| Coupling Nut Plating Specification | | 118 µin |
| Torque | | 9.74 in-lbs [1.1 Nm] |

Environmental Specifications

Temperature

| | |
|-----------------|-------------------|
| Operating Range | -55 to +200 deg C |
| Storage Range | -55 to +200 deg C |
| Plenum Rating | UL910 |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[10 FT Plenum Rated 4.3-10 to Type N F/M SPP-250-LLPL Low PIM Cable Jumper CASPP250LLPL041-10FT](#)



10 FT Plenum Rated 4.3-10 to Type N F/M SPP-250-LLPL Low PIM Cable Jumper



CASPP250LLPL041-10FT

Compliance Certifications

Plotted and Other Data

Notes:

- Values at 25°C, sea level.


PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 FT Plenum Rated 4.3-10 to Type N F/M SPP-250-LLPL Low PIM Cable Jumper CASPP250LLPL041-10FT](#)

URL: <https://www.polyphaser.com/10-ft-plenum-rated-4.3-10-to-type-n-f-m-spp-250-llpl-low-pim-cable-jumper-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

CASPP250LLPL041-10FT CAD Drawing

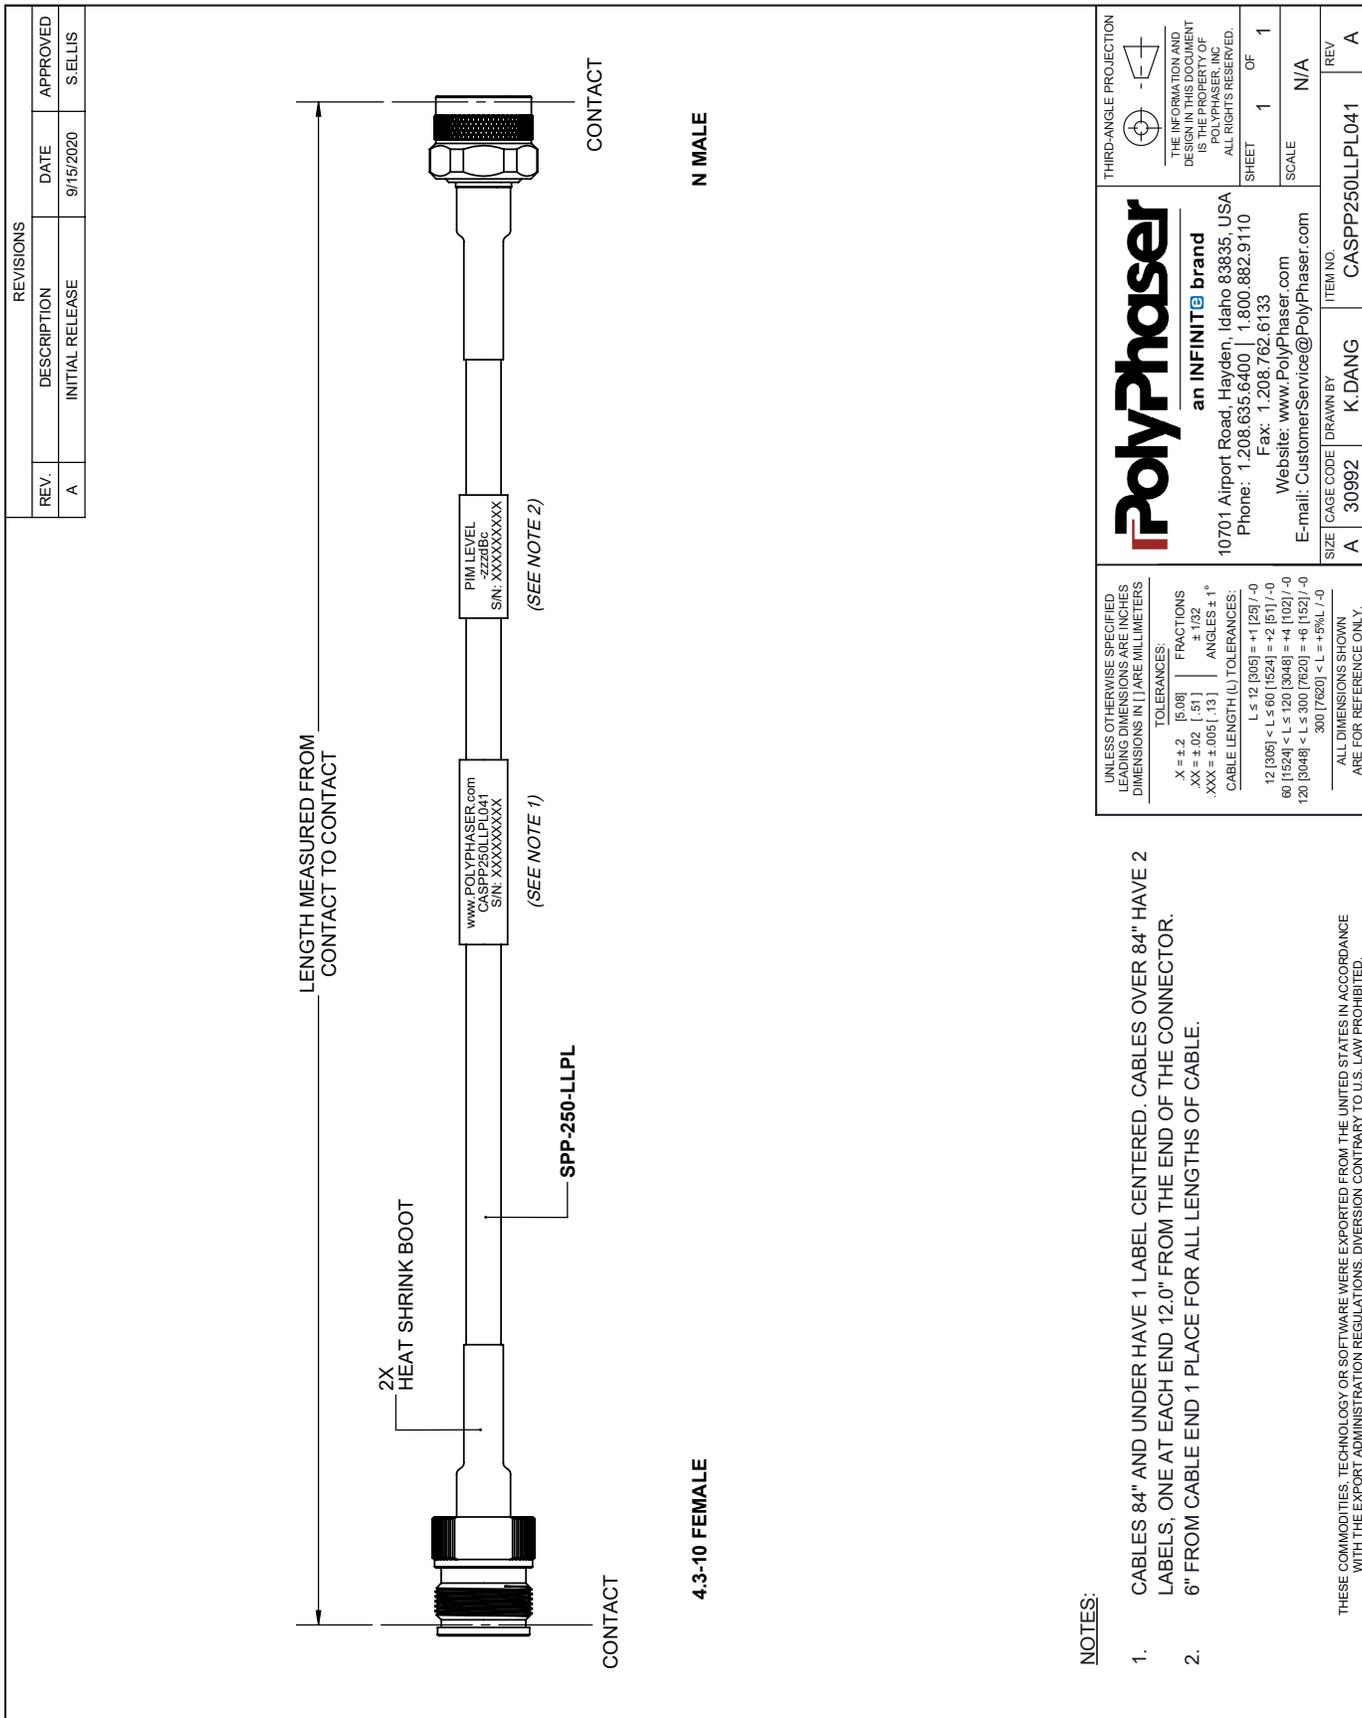

| REVISIONS | | | |
|-----------|-----------------|-----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 9/15/2020 | SELLIS |

NOTES:

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE END OF THE CONNECTOR.
2. 6" FROM CABLE END 1 PLACE FOR ALL LENGTHS OF CABLE.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

| | |
|--|--|
| <p>PolyPhaser an INFINITE brand</p> <p>10701 Airport Road, Hayden, Idaho 83835, USA Phone: 1.208.635.6400 1.800.882.9110 Fax: 1.208.762.6133 Website: www.PolyPhaser.com E-mail: CustomerService@PolyPhaser.com</p> | <p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p> |
| | <p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <p>X = +2 [5.08] FRACTIONS +1/32</p> <p>.XX = ± 0.2 [5.1] ANGLES ± 1°</p> <p>.XXX = ± 0.05 [1.3]</p> <p>CABLE LENGTH (L) TOLERANCES:</p> <p>L ≤ 12 [305] = +1 [25] / -0</p> <p>12 [305] < L ≤ 60 [1524] = +2 [51] / -0</p> <p>60 [1524] < L ≤ 120 [3048] = +4 [102] / -0</p> <p>120 [3048] < L ≤ 300 [7620] = +6 [152] / -0</p> <p>300 [7620] < L = +6%L / -0</p> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p> |
| <p>SIZE A CAGE CODE 30992 DRAWN BY K.DANG</p> | <p>ITEM NO. CASPP250LLPL041</p> |