


8 7 6 5 4 3 2 1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISI			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/23/2021	PHOSPODAR

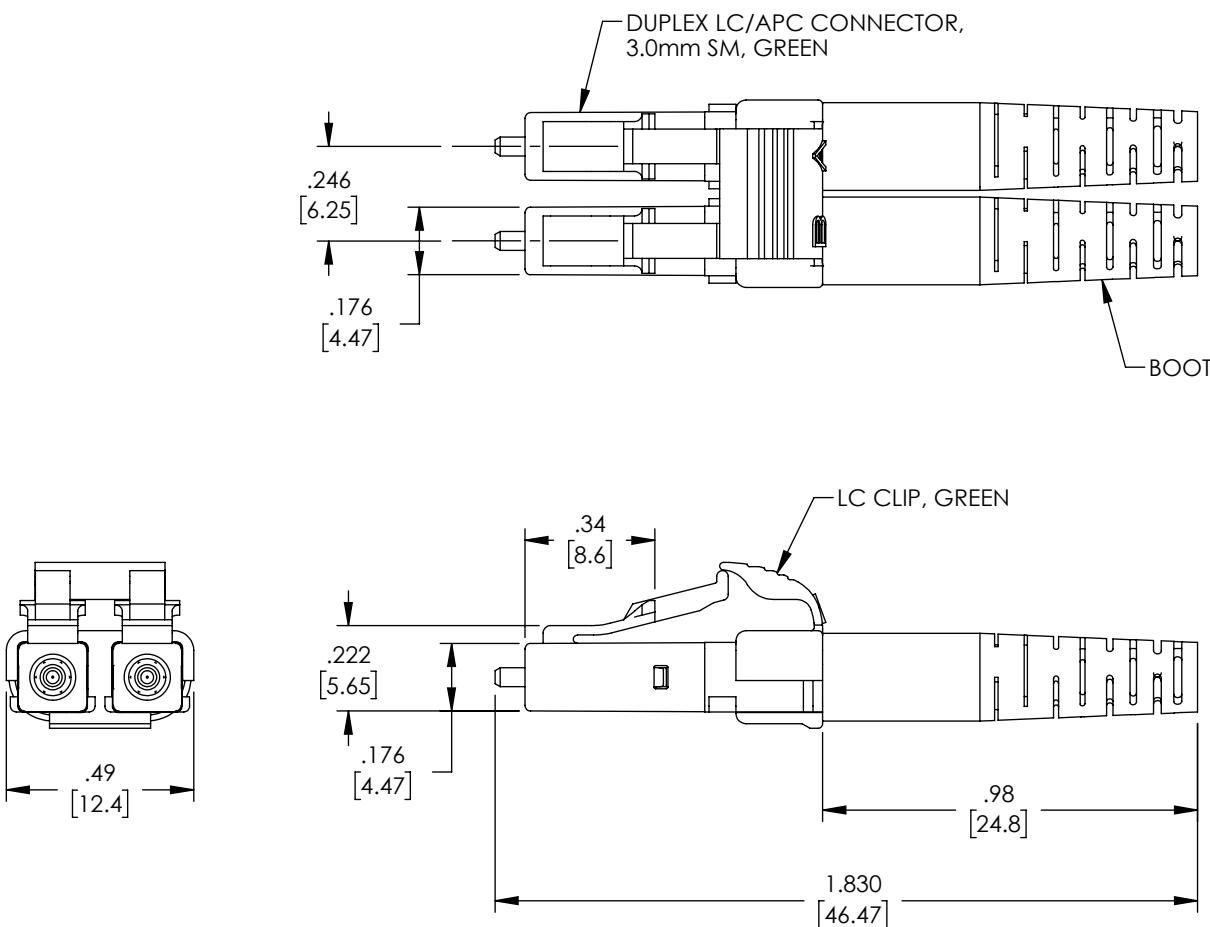

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. CONNECTOR INCLUDES 2 DUST CAPS (NOT SHOWN).
3. CONNECTOR ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041
OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = $+1$ [25] / -0 > 12 [305] ≤ 60 [1524] = $+2$ [51] / -0 > 60 [1524] ≤ 120 [3048] = $+4$ [102] / -0 > 120 [3048] ≤ 300 [7620] = $+6$ [152] / -0 > 300 [7620] = $+5\%$ / -0	DRAWN BY DZINN	07/23/2021	
	CHECKED BY BPUCHASKI	07/23/2021	
	APPROVED BY PHOSPODAR	07/23/2021	
CATEGORY FIBER OPTIC			
PRODUCT DESCRIPTION FIBER CONNECTOR, LC/APC DUPLEX, FOR 3.0MM SMF, COLOR, MIDDLE BOOT			
SIZE A CAGE CODE 30992 ITEM NO. FCO-LAS0D30-0M00			REV. A
SCALE: NONE CAD FILE: FCO-LAS0D30-0M00.SLDDRW			SHEET 1 OF 1