


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/28/2021	PHOSPODAR

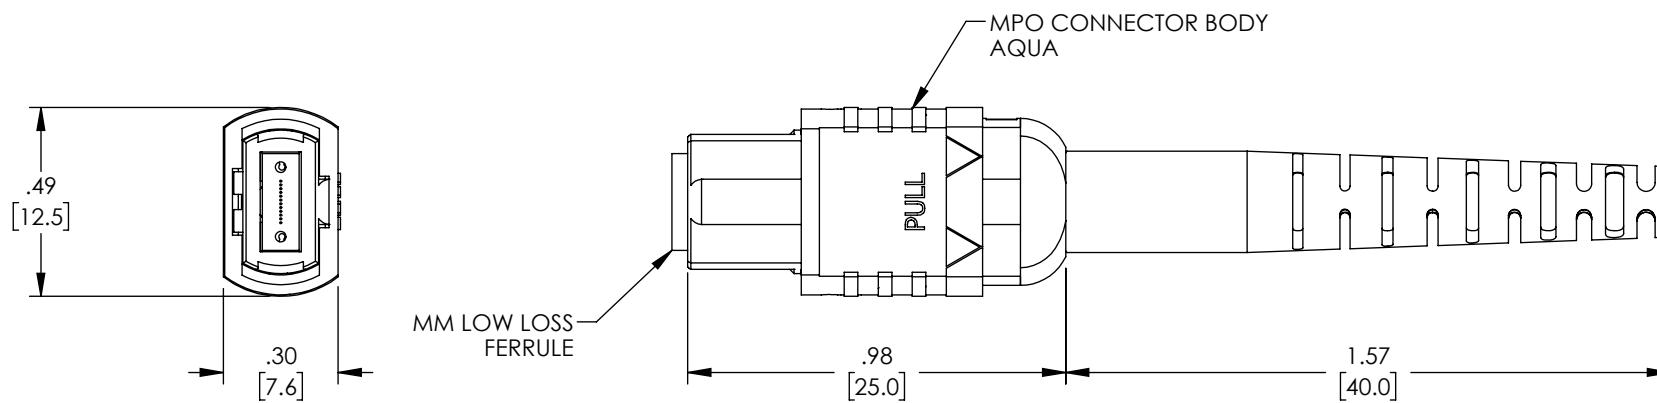

## NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. CONNECTOR INCLUDES A DUST CAP (NOT SHOWN).
3. CONNECTOR ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

## REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm].	APPROVALS	DATE	 <b>PolyPhaser</b> <small>an INFINITi brand</small>	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041		
OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = $\pm 1$ [25] / -0 $> 12$ [305] $\leq 60$ [1524] = $\pm 2$ [51] / -0 $> 60$ [1524] $\leq 120$ [3048] = $\pm 4$ [102] / -0 $> 120$ [3048] $\leq 300$ [7620] = $\pm 6$ [152] / -0 $> 300$ [7620] = $\pm 5%$ / -0	DRAWN BY DZINN	07/28/2021		CATEGORY  <b>FIBER OPTIC</b>		
	CHECKED BY BPUCHASKI	07/28/2021				
	APPROVED BY PHOSPODAR	07/28/2021				
ALL OTHER DIMENSIONAL TOLERANCES: $.X = \pm .2$ [5] $.XX = \pm .02$ [5] $.XXX = \pm .005$ [13]	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION  <b>FIBER CONNECTOR, MPO FEMALE, 12 FIBER FOR 3.0MM MMF, AQUA, LOW-LOSS</b>				
	COLOR VARIATIONS MAY OCCUR		SIZE <b>A</b>	CAGE CODE <b>30992</b>	ITEM NO. <b>FCO-MPFMM1230-AQ0P</b>	REV <b>A</b>
			SCALE: NONE	CAD FILE: FCO-MPFMM1230-AQ0P.SLDDRW		SHEET 1 OF 1