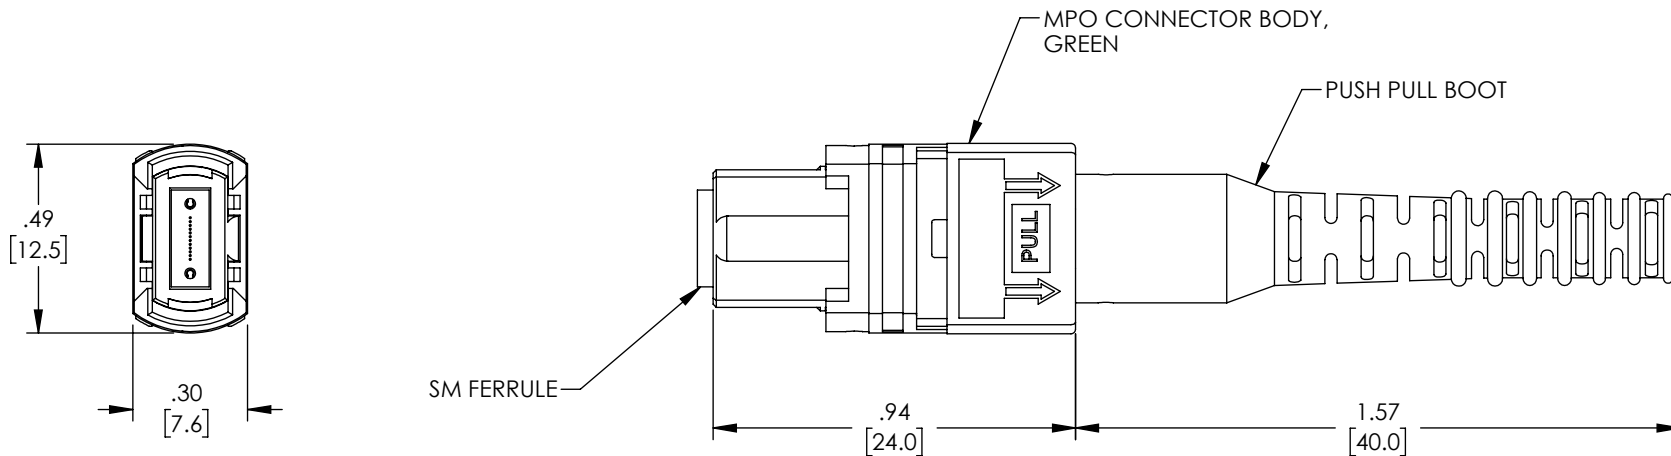


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-----------------|------------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 07/28/2021 | PHOSPODAR |
| | | | |
| | | | |





NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. CONNECTOR INCLUDES A DUST CAP (NOT SHOWN).
3. CONNECTOR ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

| | | | | | | | | | |
|---|--|--|--|------------|--|--|-------------------------------------|---|------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] | | APPROVALS | | DATE | |  an INFINITI brand | | 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041 | |
| OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 | | DRAWN BY DZINN | | 07/28/2021 | | CATEGORY FIBER OPTIC | | | |
| | | CHECKED BY BPUCHASKI | | 07/28/2021 | | | | | |
| | | APPROVED BY PHOSPODAR | | 07/28/2021 | | | | | |
| ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13] | | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | | | | PRODUCT DESCRIPTION FIBER CONNECTOR, MPO FEMALE, 12 FIBER, FOR 3.0MM SMF, GREEN, PULL BOOT | | | |
| THIRD-ANGLE PROJECTION  | | COLOR VARIATIONS MAY OCCUR | | | | SIZE A | CAGE CODE 30992 | ITEM NO. FCO-MPF5M1230-GRP0 | REV. A |
| | | | | | | SCALE: NONE | CAD FILE: FCO-MPF5M1230-GRP0.SLDDRW | | SHEET 1 OF 1 |