
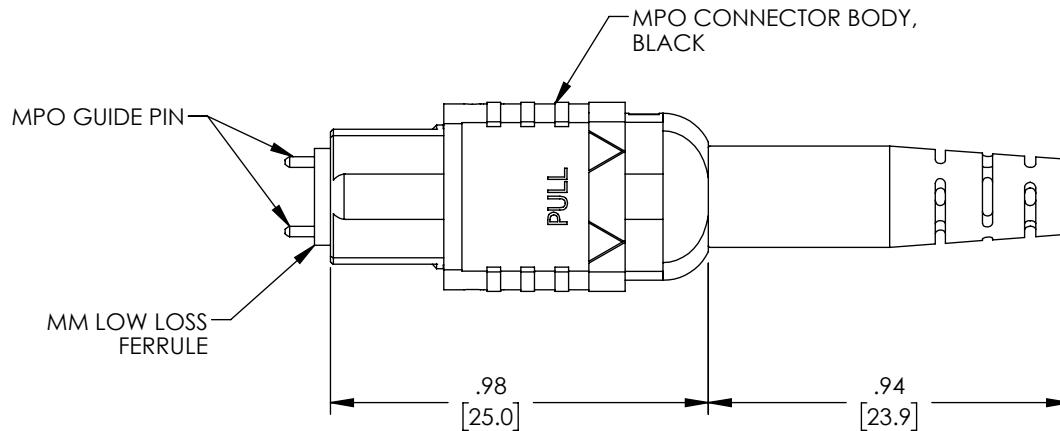


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISI

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/30/2021	PHOSPODAR



NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. CONNECTOR INCLUDES A DUST CAP (NOT SHOWN).
3. CONNECTOR ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
 ≤ 12 [305] = $+1$ [25] / -0
 > 12 [305] ≤ 60 [1524] = $+2$ [51] / -0
 > 60 [1524] ≤ 120 [3048] = $+4$ [102] / -0
 > 120 [3048] ≤ 300 [7620] = $+6$ [152] / -0
 > 300 [7620] = $+5\%$ / -0

ALL OTHER DIMENSIONAL TOLERANCES:
 $.X = \pm .2$ [5] FRACTIONS
 $.XX = \pm .02$ [5] $\pm 1/32$
 $.XXX = \pm .005$ [1.3] ANGLES $\pm 1^\circ$

THIRD-ANGLE PROJECTION



APPROVALS

DATE

DRAWN BY

DZINN

07/30/2021

CHECKED BY

BPUCHASKI

07/30/2021

APPROVED BY

PHOSPODAR

07/30/2021

CATEGORY

PolyPhaser
an INFINITI brand

10701 Airport Road,
Hayden, ID 83835
Phone: 1.208.635.6400
Fax: 1.208.955.2041

FIBER OPTIC

PRODUCT DESCRIPTION

FIBER CONNECTOR, MPO MALE, 12 FIBER, FOR
4.0MM MMF, BLACK, SHORT BOOT, LOW-LOSS

SIZE

A

30992

FCO-MPMM1240-BKSP

REV.

A

SCALE: NONE

CAD FILE: FCO-MPMM1240-BKSP.SLDDRW

SHEET 1 OF 1