



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/03/21	PHOSPODAR

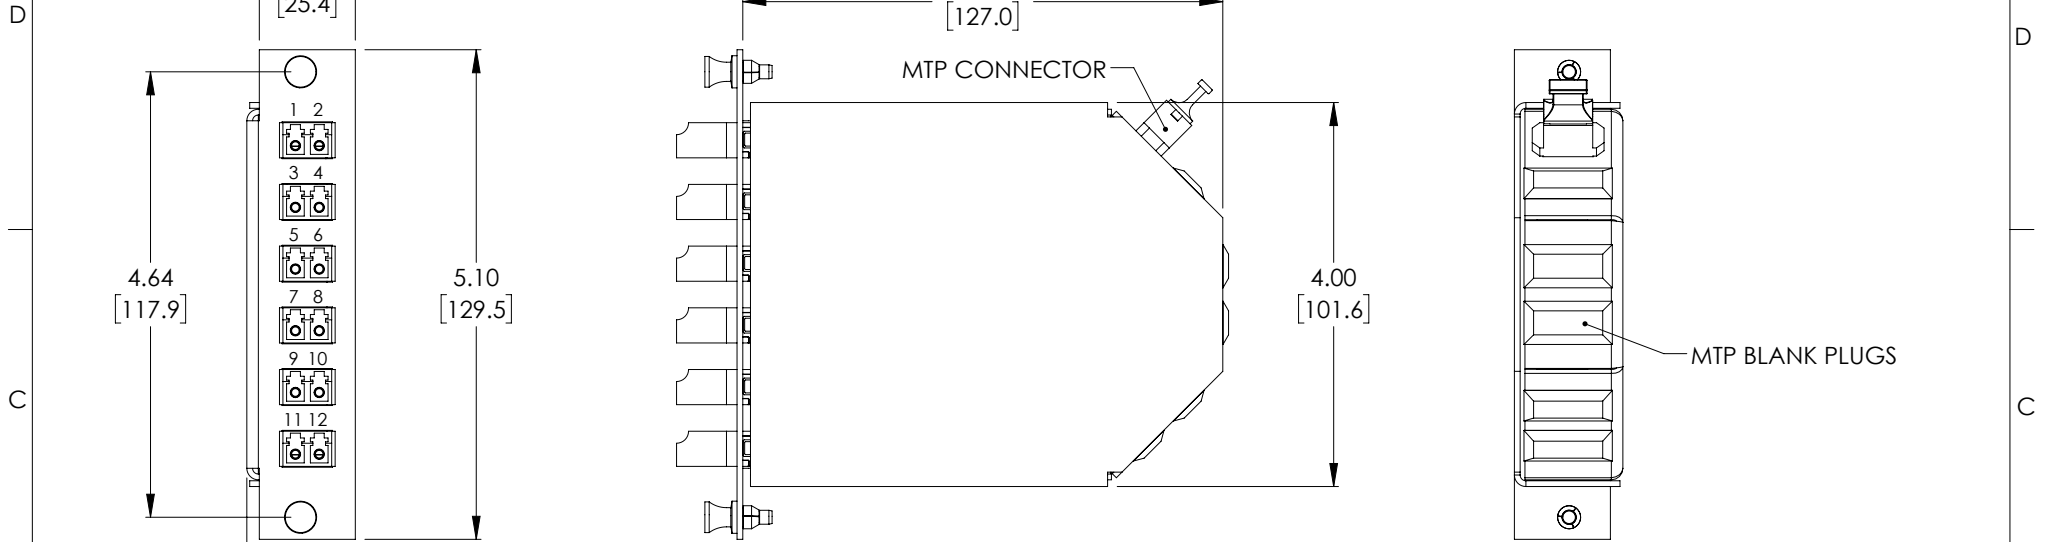

FANOUT TABLE		
LC	COLOR	MTP
P1	BLUE	1
P2	ORANGE	2
P3	GREEN	3
P4	BROWN	4
P5	GRAY	5
P6	WHITE	6
P7	RED	7
P8	BLACK	8
P9	YELLOW	9
P10	VIOLET	10
P11	PINK	11
P12	AQUA	12

ROTATE 90°

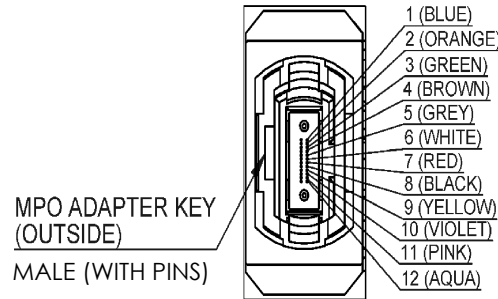


MODEL NO.	DESCRIPTION	FIBER TYPE	LC ADAPTER COLOR
FPAL-LCD12-MP1-SMCR	MTP Male 12 Fiber to 6 Duplex LC 12 Port SMF	SMF OS1 9/125μm	BLUE

MPO		LC/UPC	
INSERTION LOSS	RETURN LOSS	INSERTION LOSS	RETURN LOSS
≤0.7dB	≥45dB	≤0.30dB	≥50dB

- NOTES:
1. GUARANTEED VALUE ON IL AND RL AS WHOLE MODULE.
 2. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
 3. COUPLERS SHALL BE SHIPPED WITH DUST CAPS INSTALLED. (NOT SHOWN)
 4. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITI® brand		10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DMAAY		05/25/21		CATEGORY FIBER OPTICS			
		CHECKED BY PHOSPODAR		06/03/21					
		APPROVED BY PHOSPODAR		06/03/21					
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [1.3] ANGLES ± 1°		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION FIBER ADAPTER PANEL LGX STYLE CASSETTE 6					
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 30992		ITEM NO. FPAL-LCD12-MP1-SMCR	
				SCALE: NONE		CAD FILE: FPAL-LCD12-MP1-SMCR.SLDDRW		SHEET 1 OF 1	