
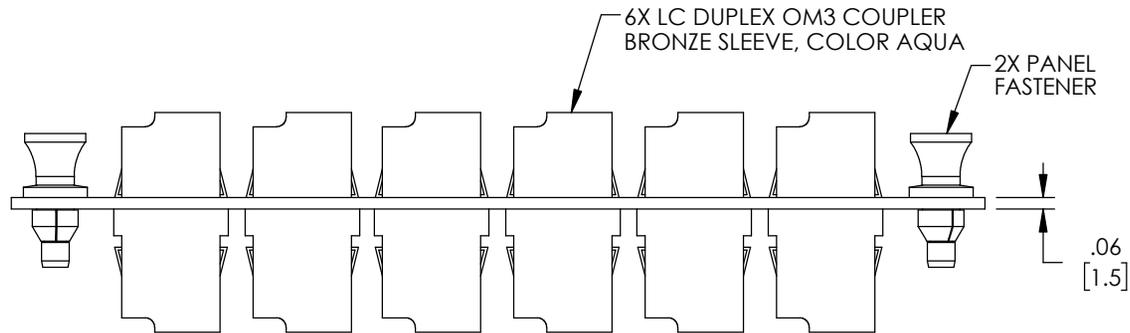


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|--|------------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 06/03/2021 | PHOSPODAR |
| B | ECN 11212 ROTATE MOUNTING POSITION OF COUPLERS | 07/16/2021 | PHOSPODAR |
| | | | |

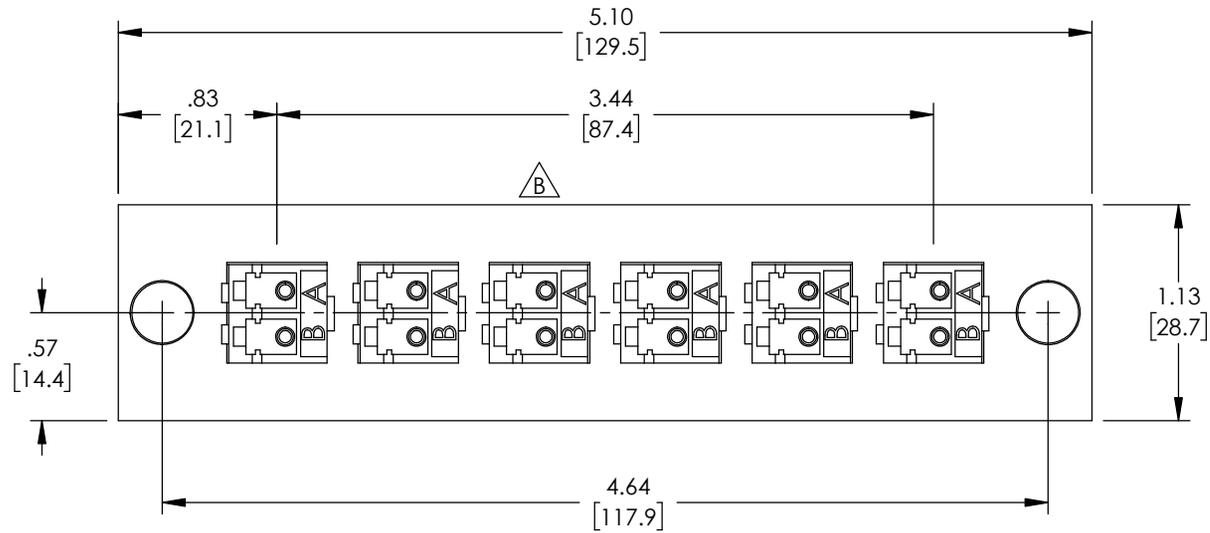


NOTES:

1. FINISH: BLACK POWDER COAT.
2. RECOMMENDED MOUNTING HOLE FOR MATING FASTENER:
Ø.252 +.002/.000.
3. ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
4. ALL DIMENSIONS FOR REFERENCE ONLY.
5. COUPLERS SUPPLIED WITH DUST CAPS, NOT SHOWN.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

| | | | |
|---|--|----------------------------------|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5] FRACTIONS ± 1/32 .XX = ±.02 [.5] ANGLES ± 1° .XXX = ±.005 [1.3] | APPROVALS | DATE |  10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041 |
| | DRAWN BY DMAY | 06/01/2021 | |
| | APPROVED BY PHOSPODAR | 06/03/2021 | CATEGORY FIBER OPTIC SUB PANELS |
| THIRD-ANGLE PROJECTION  | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | COLOR VARIATIONS MAY OCCUR | PRODUCT DESCRIPTION FIBER ADAPTER PANEL LC DUPLEX 6 AQUA CONNECTOR |
| | SIZE A | CAGE CODE 30992 | ITEM NO. FPAL-LCD6-AQ-M3BR |
| | SCALE: NONE | CAD FILE: fpaHcd6-aq-m3br.SLDDRW | REV. B |
| | | | SHEET 1 OF 1 |