


8 7 6 5 4 3 2 1  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REV DESCRIPTION DATE APPROVED

A INITIAL RELEASE 06/02/21 PHOSPODAR

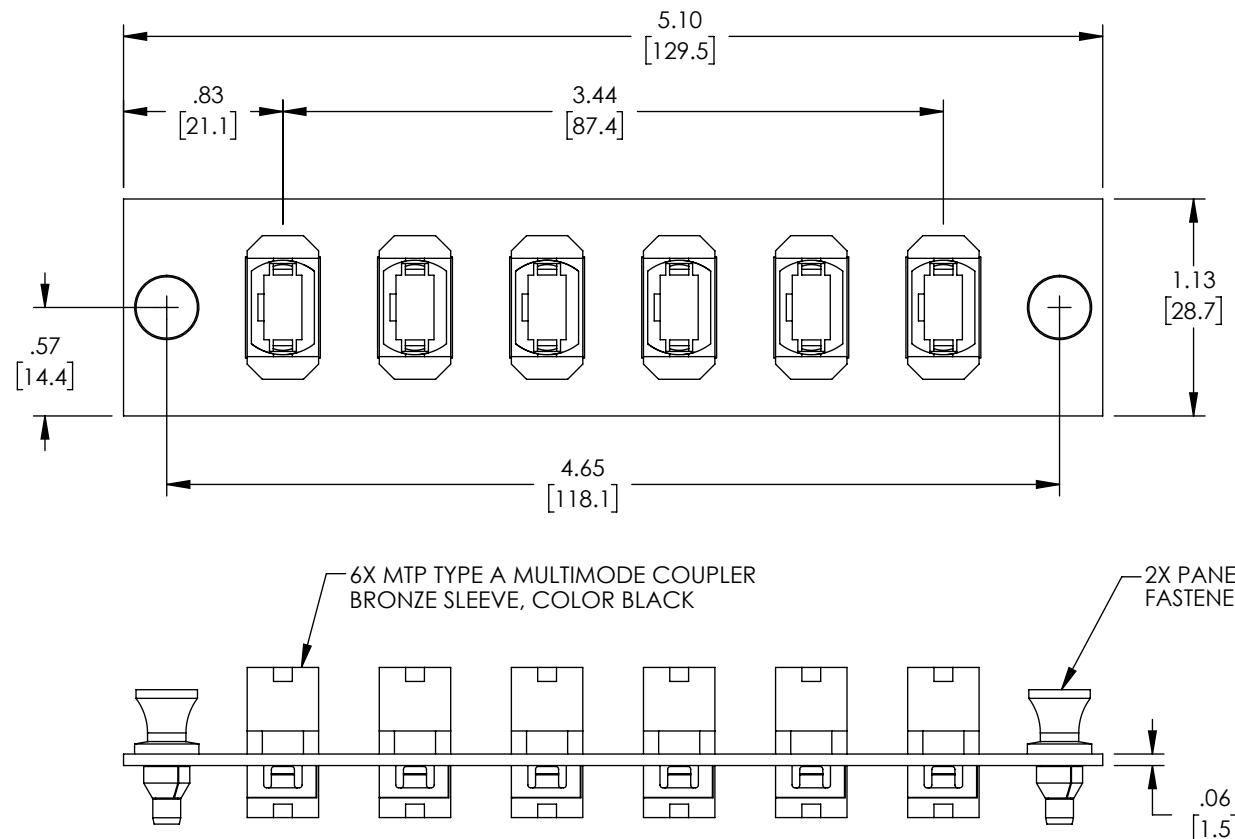

NOTES:

1. FINISH: BLACK POWDER COAT.
2. RECOMMENDED MOUNTING HOLE FOR MATING FASTENER:  
 $\varnothing .252 +.002/.000$ .
3. ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
4. ALL DIMENSIONS FOR REFERENCE ONLY.
5. COUPLERS SUPPLIED WITH DUST CAPS, NOT SHOWN.

**REGULATORY COMPLIANCE:**

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:  
 $\leq 12$  [305] =  $+1$  [25] / -0  
 $> 12$  [305]  $\leq 60$  [1524] =  $+2$  [51] / -0  
 $> 60$  [1524]  $\leq 120$  [3048] =  $+4$  [102] / -0  
 $> 120$  [3048]  $\leq 300$  [7620] =  $+6$  [152] / -0  
 $> 300$  [7620] =  $+5\%$  / -0

ALL OTHER DIMENSIONAL TOLERANCES:

$.X = \pm .2$  [5]  
 $.XX = \pm .02$  [.5]  
 $.XXX = \pm .005$  [.13]

FRACTIONS  
 $\pm 1/32$   
 ANGLES  $\pm 1^\circ$

THIRD-ANGLE PROJECTION

COLOR VARIATIONS  
 MAY OCCUR

APPROVALS

DRAWN BY

DMAY

06/02/21

CHECKED BY

PHOSPODAR

06/02/21

APPROVED BY

PHOSPODAR

06/02/21

DATE

DATE

06/02/21

DATE