

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISI

DESCRIPTION


DATE

APPROVED

A INITIAL RELEASE

06/03/21

PHOSPODAR

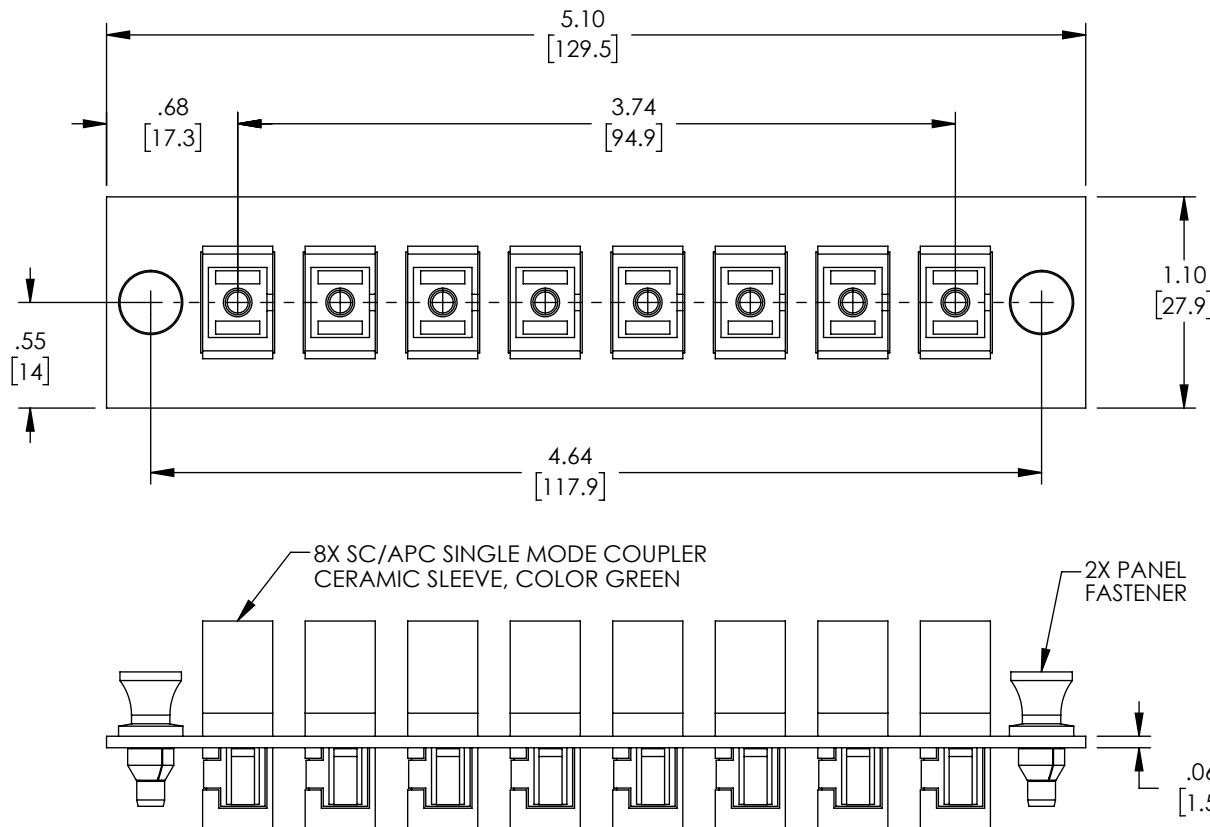

NOTES:

1. FINISH: BLACK POWDER COAT.
2. RECOMMENDED MOUNTING HOLE FOR MATING FASTENER:
Ø.252 +.002/.000.
3. ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
4. ALL DIMENSIONS FOR REFERENCE ONLY.
5. COUPLERS SUPPLIED WITH DUST CAPS, NOT SHOWN.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm].

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] FRACTIONS
.XX = ± .02 [5] ± 1/32
.XXX = ± .005 [1.3] ANGLES ± 1°



APPROVALS

DRAWN BY

DMAY

05/26/21

CHECKED BY

PHOSPODAR

06/03/21

APPROVED BY

PHOSPODAR

06/03/21

DATE

05/26/21

06/03/21

06/03/21

PolyPhaser
an INFINIT brand

10701 Airport Road,
Hayden, ID 83835
Phone: 1.208.635.6400
Fax: 1.208.955.2041

FIBER OPTIC SUB PANELS

PRODUCT DESCRIPTION
FIBER ADAPTER PANEL SC/APC
SIMPLEX 8 GREEN

SIZE	CAGE CODE	ITEM NO.	REV.
A	30992	FPAL-SA8-GN-SMCR	A
SCALE: NONE	CAD FILE: FPAL-SA8-GN-SMCR.SLDDRW	SHEET 1 OF 1	