
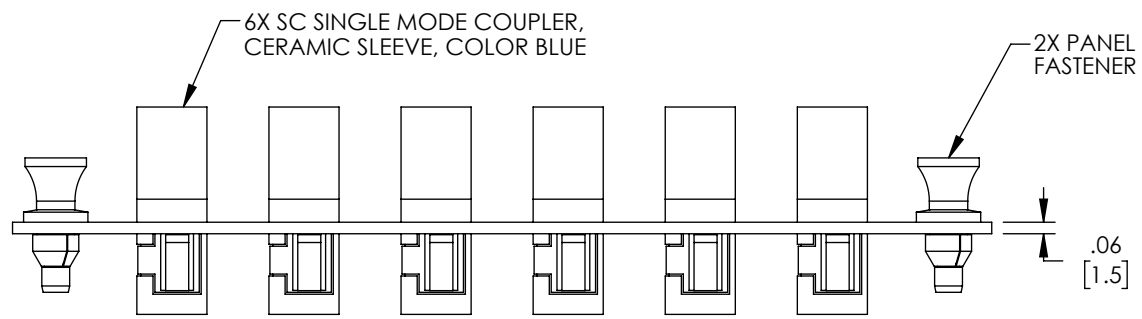


8 7 6 5 4 3 2 1


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/03/21	PHOSPODAR

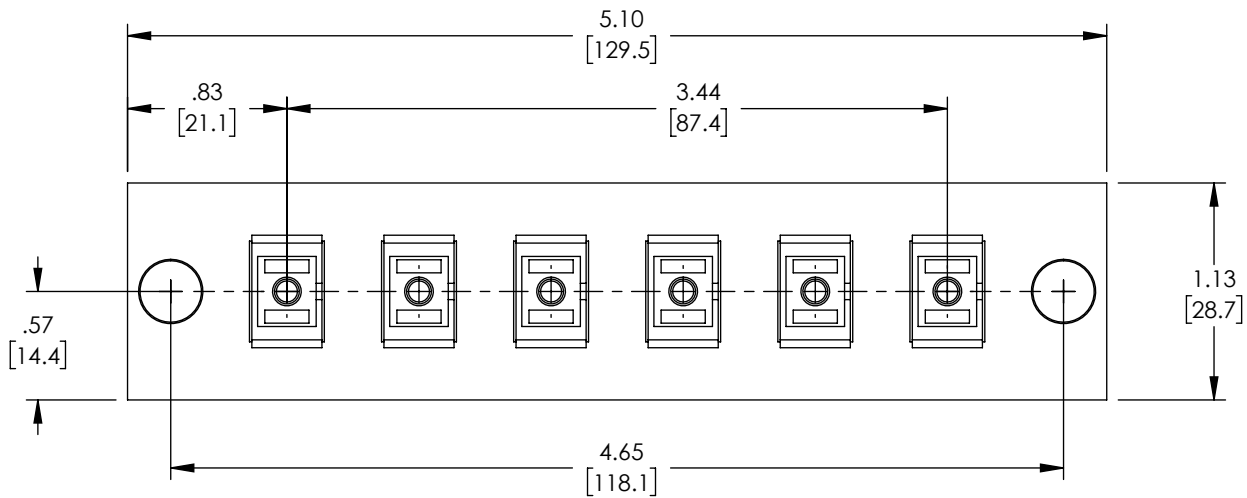

- NOTES:
1. FINISH: BLACK POWDER COAT.
 2. RECOMMENDED MOUNTING HOLE FOR MATING FASTENER:
Ø.252 +.002/.000.
 3. ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
 4. ALL DIMENSIONS FOR REFERENCE ONLY.
 5. COUPLERS SUPPLIED WITH DUST CAPS, NOT SHOWN.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		<div><div><div><div></div><div>PolyPhaser</div><div>an INFINITI® brand</div></div></div><div>10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041</div></div>			
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]		DRAWN BY DMAY		05/26/21				CATEGORY	
		CHECKED BY PHOSPODAR		06/03/21				FIBER OPTIC SUB PANELS	
		APPROVED BY PHOSPODAR		06/03/21		PRODUCT DESCRIPTION			
		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		FIBER ADAPTER PANEL SC SIMPLEX 6 BLUE CONNECTOR					
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 30992	ITEM NO. FPAL-SC6-BL-SMCR	REV. A		
				SCALE: NONE		CAD FILE: FPAL-SC6-BL-SMCR.SLDDRW	SHEET 1 OF 1		