


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/03/21	PHOSPODAR

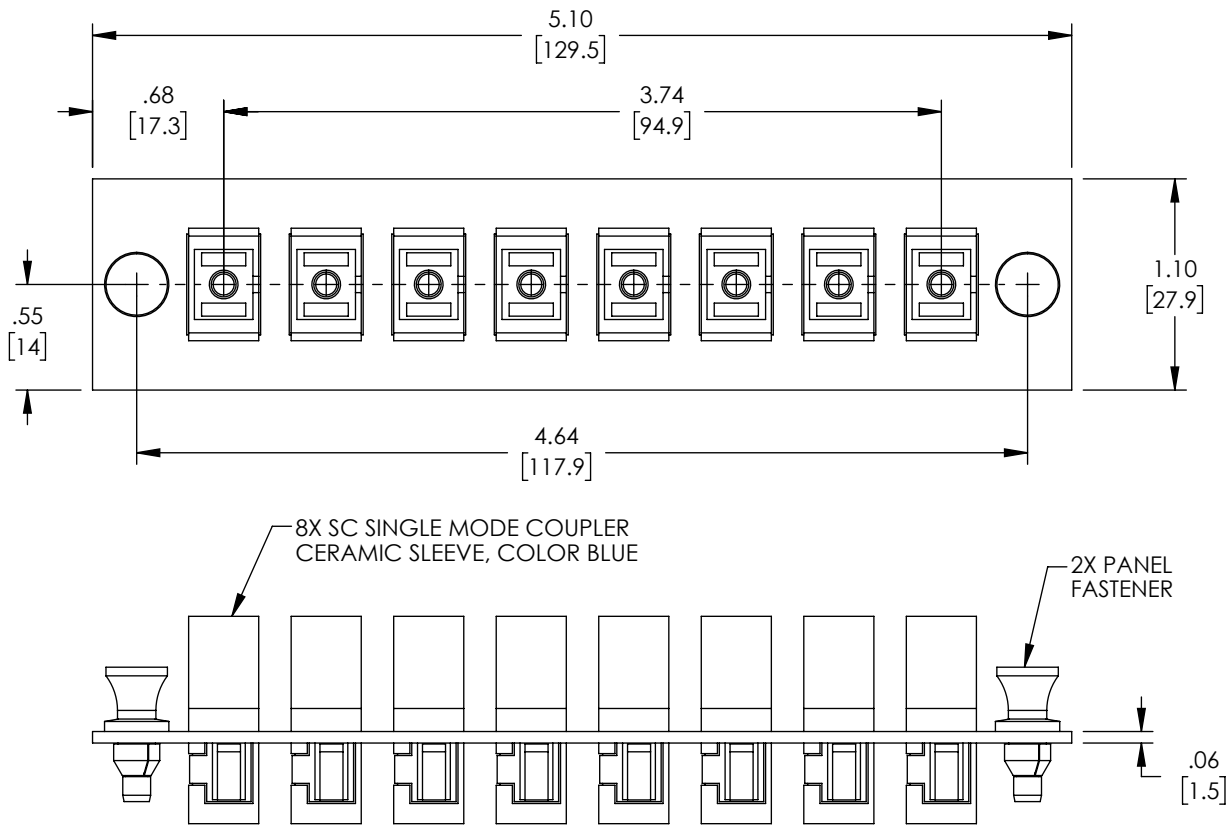

NOTES:

1. FINISH: BLACK POWDER COAT.
2. RECOMMENDED MOUNTING HOLE FOR MATING FASTENER:  
Ø.252 +.002/-.000.
3. ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
4. ALL DIMENSIONS FOR REFERENCE ONLY.
5. COUPLERS SUPPLIED WITH DUST CAPS, NOT SHOWN.

**REGULATORY COMPLIANCE:**  
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		<div><div><div></div><div>PolyPhaser</div><div>an INFINITI® brand</div></div></div>		10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DMAY		05/26/21		CATEGORY		FIBER OPTIC SUB PANELS	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]      FRACTIONS .XX = ± .02 [.5]      ± 1/32 .XXX = ± .005 [.13]      ANGLES ± 1°		CHECKED BY PHOSPODAR		06/03/21					
		APPROVED BY PHOSPODAR		06/03/21					
THIRD-ANGLE PROJECTION 		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY				PRODUCT DESCRIPTION FIBER ADAPTER PANEL SC SIMPLEX 8 BLUE			
		COLOR VARIATIONS MAY OCCUR				SIZE A	CAGE CODE 30992	ITEM NO. FPAL-SC8-BL-SMCR	REV. A
SCALE: NONE						CAD FILE: FPAL-SC8-BL-SMCR.SLDDRW		SHEET 1 OF 1	