


8 7 6 5 4 3 2 1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/17/2021	PHOSPODAR

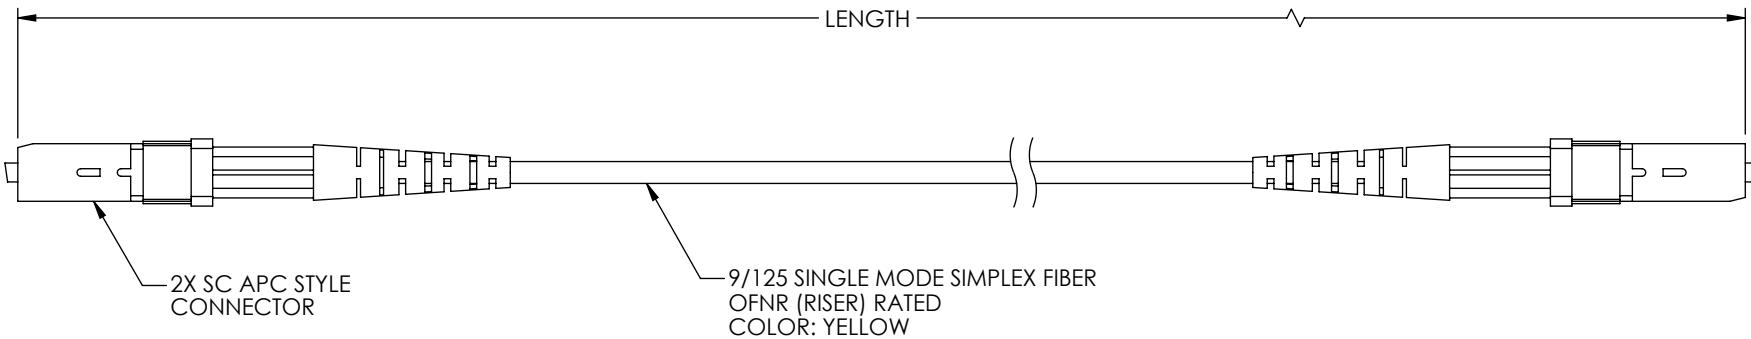

PART NUMBER	LENGTH METERS [FEET]
FPC1SASA-OSMRY30-01	1.0 [3.3]
FPC1SASA-OSMRY30-02	2.0 [6.6]
FPC1SASA-OSMRY30-03	3.0 [9.8]
FPC1SASA-OSMRY30-05	5.0 [16.4]

NOTES:

1. SC/APC CONNECTOR ASSEMBLY POLISH TYPE: 8° APC
2. ALL CONNECTORS ACCCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	PolyPhaser an INFINITE brand	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DMAY	05/13/2021			
	CHECKED BY PHOSPODAR	05/17/2021			
	APPROVED BY PHOSPODAR	05/17/2021			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°			SC/APC TO SC/APC SINGLEMODE SIMPLEX		
THIRD-ANGLE PROJECTION			COLOR VARIATIONS MAY OCCUR	SIZE A CAGE CODE 30992 ITEM NO. FPC1SASA-OSMRY30 REV. A	
			SCALE: NONE	CAD FILE: FPC1SASA-OSMRY30.SLDDRW SHEET 1 OF 1	