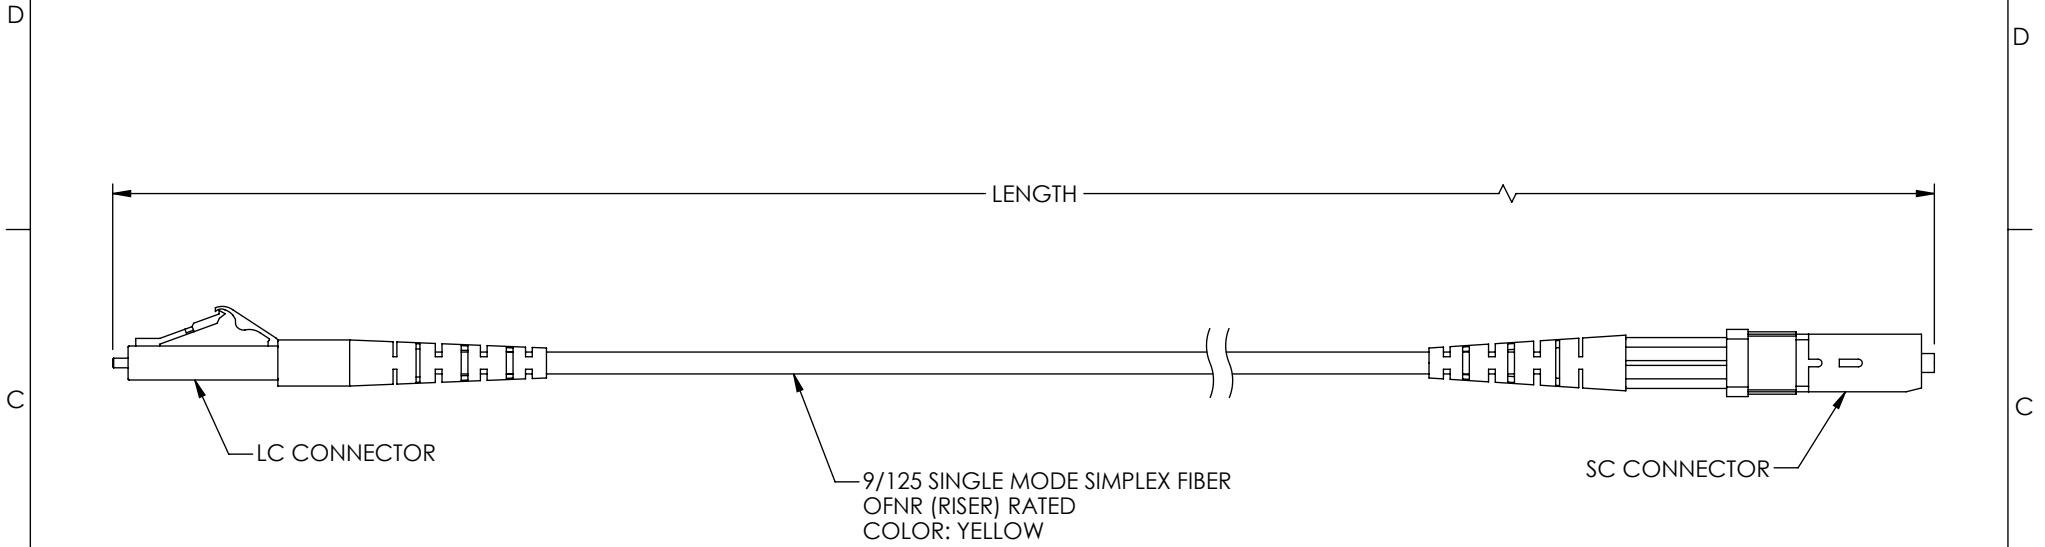


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/17/2021	PHOSPODAR





PART NUMBER	LENGTH METERS [FEET]
FPC1SCLC-OSMRY30-01	1.0 [3.3]
FPC1SCLC-OSMRY30-02	2.0 [6.6]
FPC1SCLC-OSMRY30-03	3.0 [9.8]
FPC1SCLC-OSMRY30-05	5.0 [16.4]

NOTES:

- LC CONNECTOR ASSEMBLY POLISH TYPE: PC
SC CONNECTOR ASSEMBLY POLISH TYPE: PC
- ALL CONNECTORS ACCOMPANIED WITH A DUST
CAP INSTALLED (NOT SHOWN).
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(ROHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		<div> an INFINITO brand</div> <div>10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041</div>	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DMAY		05/13/2021			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]		CHECKED BY PHOSPODAR		05/17/2021			
THIRD-ANGLE PROJECTION 		APPROVED BY PHOSPODAR		05/17/2021		CATEGORY FIBER OPTICS	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION SC TO LC SINGLEMODE SIMPLEX					
COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 30992	ITEM NO. FPC1SCLC-OSMRY30		REV. A	
		SCALE: NONE		CAD FILE: FPC1SCLC-OSMRY30.SLDDRW			SHEET 1 OF 1