


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISI

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASES	05/17/2021	PHOSPODAR

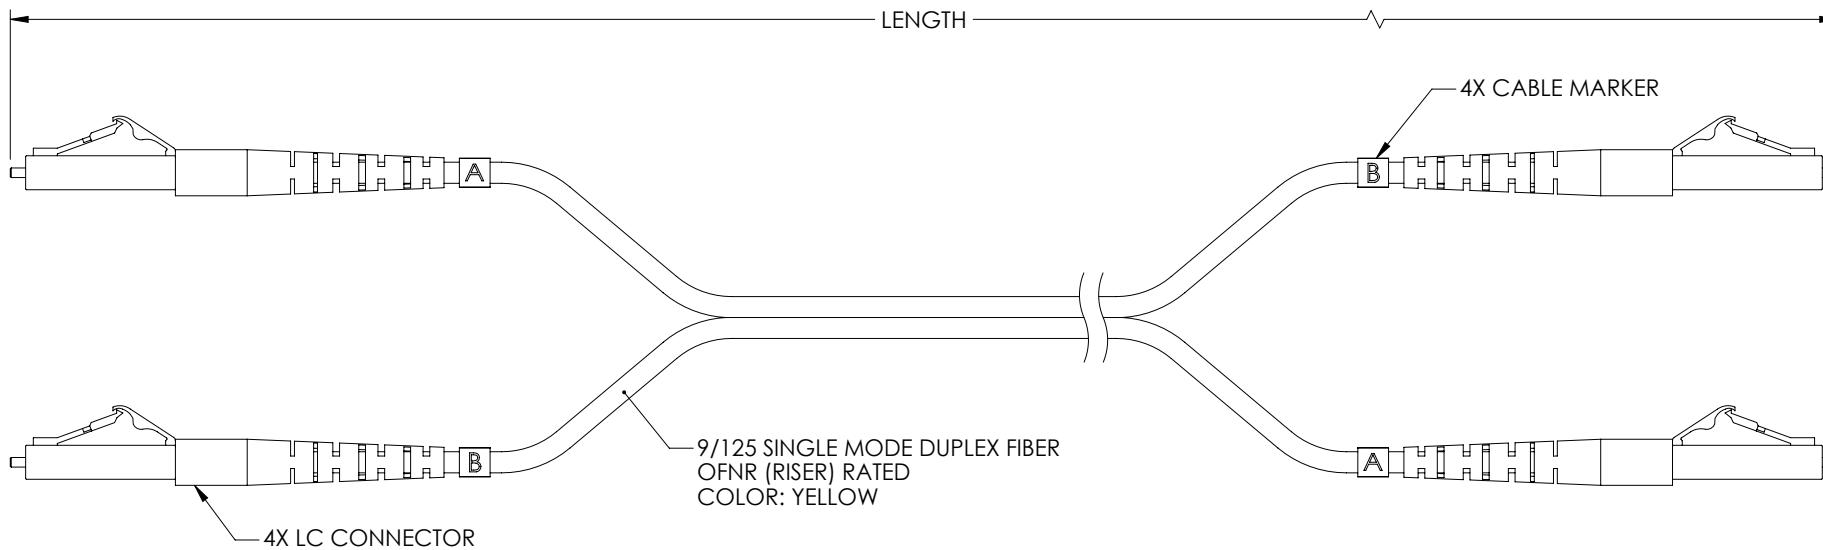

PART NUMBER	LENGTH METERS [FEET]
FPC2LCLC-0SMRY30-01	1.0 [3.3]
FPC2LCLC-0SMRY30-02	2.0 [6.6]
FPC2LCLC-0SMRY30-03	3.0 [9.8]
FPC2LCLC-0SMRY30-04	4.0 [13.1]
FPC2LCLC-0SMRY30-05	5.0 [16.4]
FPC2LCLC-0SMRY30-10	10.0 [32.8]
FPC2LCLC-0SMRY30-15	15.0 [49.2]

NOTES:

1. LC CONNECTOR ASSEMBLY POLISH TYPE: PC
2. ALL CONNECTORS ACCCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	PolyPhaser an INFINIT [®] brand	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DMAY	05/11/2021			
	CHECKED BY PHOSPODAR	05/17/2021			
	APPROVED BY PHOSPODAR	05/17/2021			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [5] ± 1/32 .XXX = ± .005 [13] ANGLES ± 1°			DUAL LC TO DUAL LC SINGLEMODE DUPLEX		
THIRD-ANGLE PROJECTION			SIZE A	CAGE CODE 30992	
COLOR VARIATIONS MAY OCCUR			ITEM NO. FPC2LCLC-0SMRY30	REV. A	
SCALE: NONE			CAD FILE: FPC2LCLC-0SMRY30.SLDDRW	SHEET 1 OF 1	