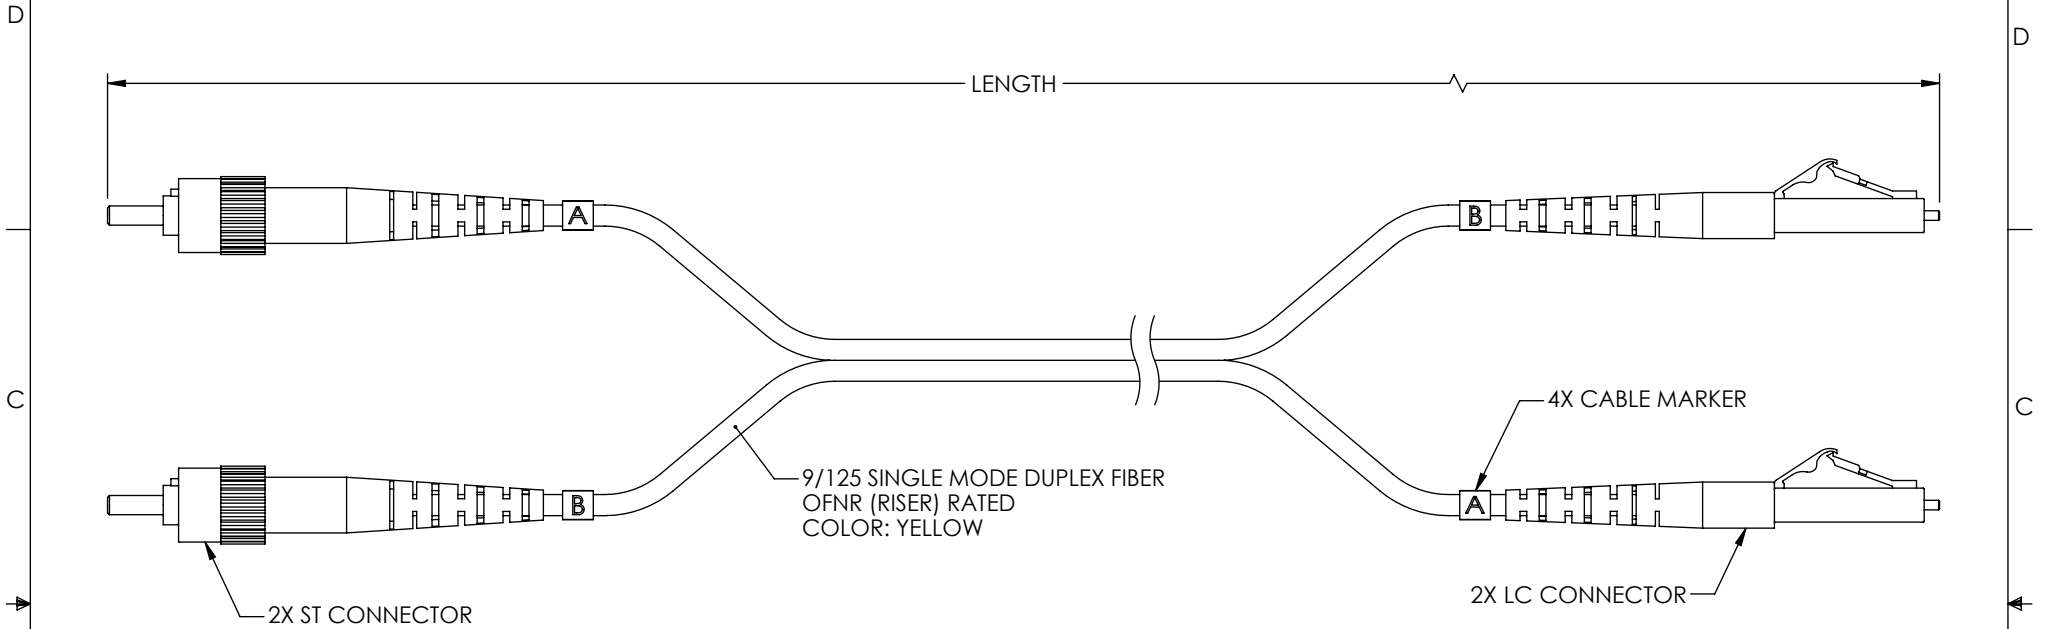


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/17/2021	PHOSPODAR





PART NUMBER	LENGTH METERS [FEET]
FPC2STLC-OSMRY30-01	1.0 [3.3]
FPC2STLC-OSMRY30-02	2.0 [6.6]
FPC2STLC-OSMRY30-03	3.0 [9.8]
FPC2STLC-OSMRY30-05	5.0 [16.4]

NOTES:

- ST CONNECTOR ASSEMBLY POLISH TYPE: PC  
LC CONNECTOR ASSEMBLY POLISH TYPE: PC
- ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:  
CE2011/65/EU(ROHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		<div> an INFINITI® brand</div> <div>10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041</div>		
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DMAY		05/12/2021				
		CHECKED BY PHOSPODAR		05/17/2021				
		APPROVED BY PHOSPODAR		05/17/2021				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]      FRACTIONS .XX = ± .02 [.5]      ± 1/32 .XXX = ± .005 [.13]      ANGLES ± 1°		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY  FIBER OPTICS				
THIRD-ANGLE PROJECTION 				PRODUCT DESCRIPTION  ST TO LC SINGLEMODE DUPLEX				
COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 30992		ITEM NO. FPC2STLC-OSMRY30		REV. A
		SCALE: NONE		CAD FILE: FPC2STLC-OSMRY30.SLDDRW				SHEET 1 OF 1