


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/2021	PHOSPODAR



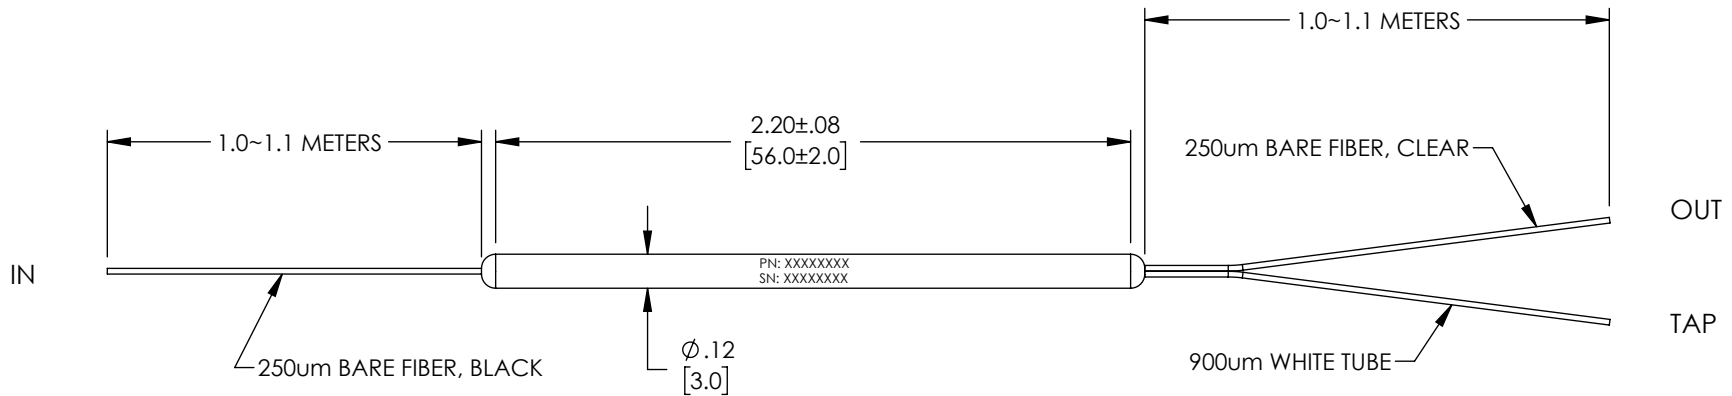

ITEM NUMBER	SPLIT	WAVELENGTHS	INSERTION LOSS PER SPLIT	PDL	RETURN LOSS
		nm	dB	dB	dB
FTAP-FMM-5050-F	50/50	850 ± 10	≤ 4.0	≤ 0.15	≥ -55

#### NOTES:

1. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

#### REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0  ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]      FRACTIONS ± 1/32 .XX = ± .02 [.5]    ANGLES ± 1° .XXX = ± .005 [.13]  THIRD-ANGLE PROJECTION 	APPROVALS	DATE	 an INFINITI brand  10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041			
	DRAWN BY DMAY	05/07/2021				
	CHECKED BY PHOSPODAR	05/10/2021	CATEGORY	FIBER OPTIC		
	APPROVED BY PHOSPODAR	05/10/2021				
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION			
			Passive Optical Tap,MMF no connectors			
COLOR VARIATIONS MAY OCCUR			SIZE <b>A</b>	CAGE CODE <b>30992</b>	ITEM NO. FTAP-FMM-xxxx-F	REV. <b>A</b>
			SCALE: NONE		CAD FILE: FTAP-FMM-xxxx-F.SLDDRW	SHEET 1 OF 1