


8 7 6 5 4 3 2 1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/2021	PHOSPODAR

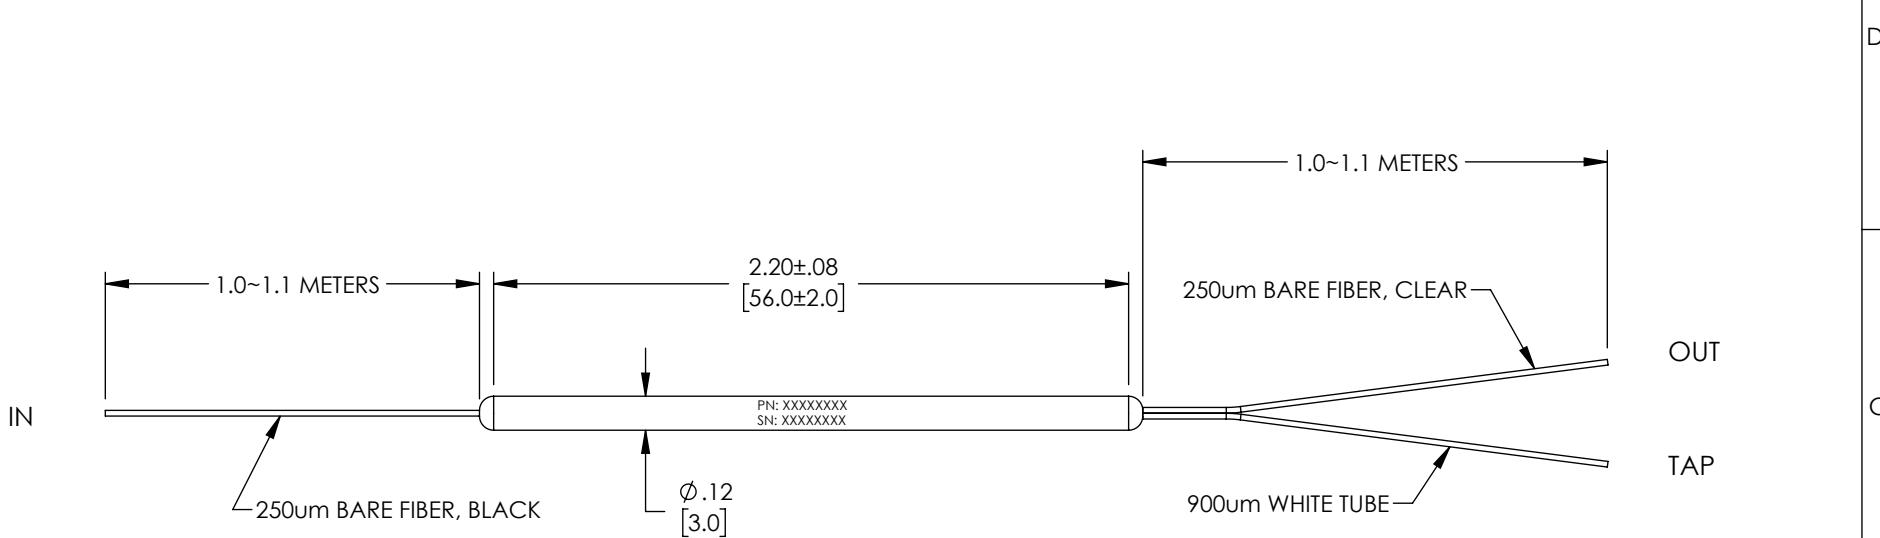

ITEM NUMBER	SPLIT	WAVELENGTHS nm	INSERTION LOSS PER SPLIT dB	PDL	RETURN LOSS dB
				1310±10	1550±10
FTAP-FSM-5050-F	50/50		3.8		
FTAP-FSM-6040-F	60/40		2.9/5.0		
FTAP-FSM-7030-F	70/30		2.2/6.4	≤ 0.15	≥ -55
FTAP-FSM-8020-F	80/20		1.4/8.5		
FTAP-FSM-9010-F	90/10		0.8/12.7		

NOTES:

1. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	PolyPhaser an INFINIT [®] brand	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041
	DRAWN BY DMAY	05/07/2021		
	CHECKED BY PHOSPODAR	05/10/2021		
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	APPROVED BY PHOSPODAR	05/10/2021	CATEGORY	FIBER OPTIC
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [5] ± 1/32 .XXX = ± .005 [1.3] ANGLES ± 1°	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION
THIRD-ANGLE PROJECTION	COLOR VARIATIONS MAY OCCUR			SIZE A CAGE CODE 30992 ITEM NO. FTAP-FSM-xxxx-F REV. A SCALE: NONE CAD FILE: FTAP-FSM-xxxx-F.SLDDRW SHEET 1 OF 1