


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/6/21	PHOSPODAR

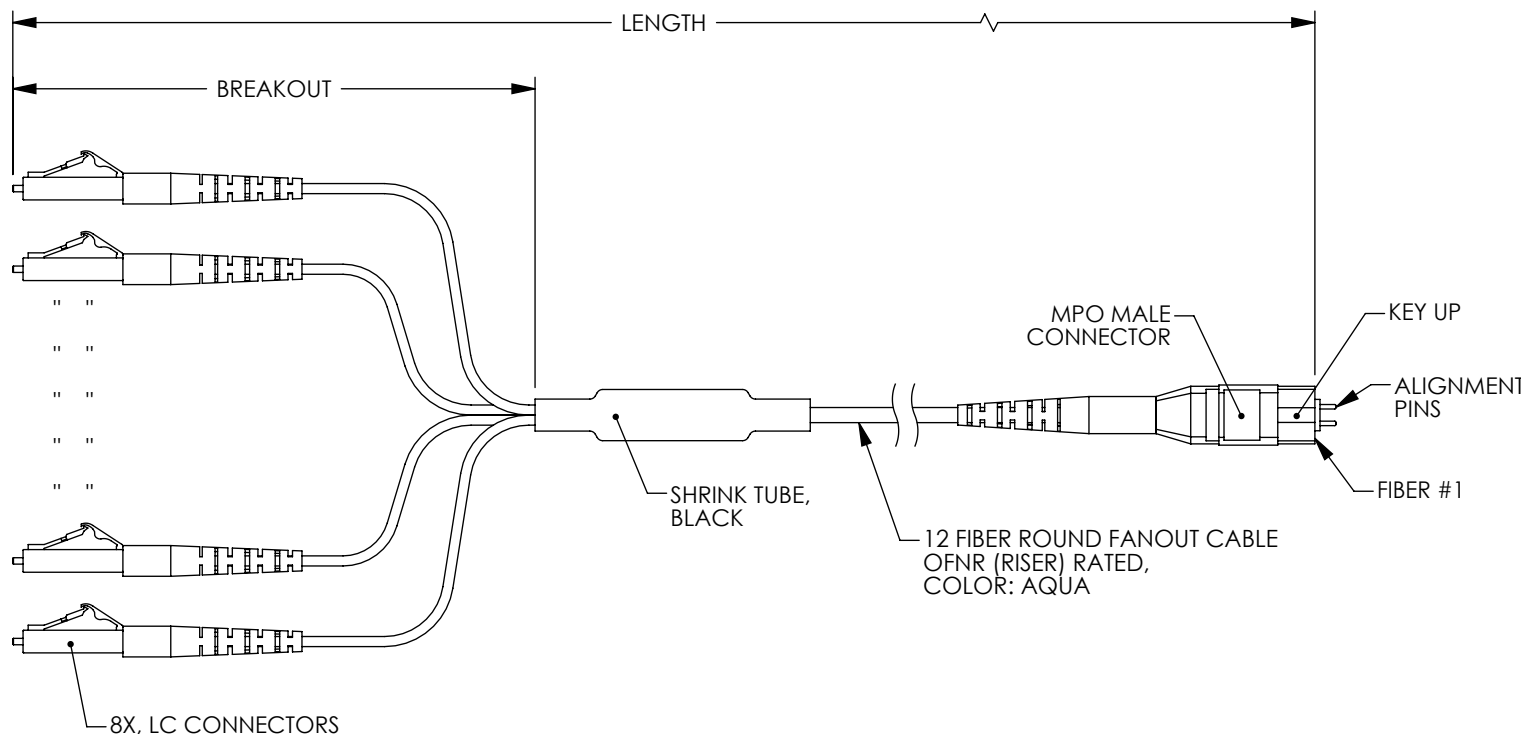

WIRING MAP	
MPO FIBER #	LC COLOR
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	-
6	-
7	-
8	-
9	YELLOW
10	PURPLE
11	ROSE
12	AQUA

PART NUMBER	FIBER MODE	LENGTH METERS [FEET]	BREAKOUT METERS [FEET]
MFO-M8M4-LCR-1	50/125 MULTIMODE OM4	1.0 [3.28]	.61 [2.0]
MFO-M8M4-LCR-3	50/125 MULTIMODE OM4	3.0 [9.84]	.61 [2.0]
MFO-M8M4-LCR-5	50/125 MULTIMODE OM4	5.0 [16.40]	.61 [2.0]
MFO-M8M4-LCR-10	50/125 MULTIMODE OM4	10.0 [32.81]	.61 [2.0]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		PolyPhaser an INFINITI® brand 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041				
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DMAY		7/27/21		CATEGORY FIBER OPTICS				
		CHECKED BY PHOSPODAR		8/6/21						
		APPROVED BY PHOSPODAR		8/6/21						
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY				PRODUCT DESCRIPTION Fan-Out Cable, MPO Male to LC, 8 Fibers, OM4, OFNR Jacket, Aqua				
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR				SIZE A	CAGE CODE 30992	ITEM NO. MFO-M8M4-LCR	REV. A	
						SCALE: NONE		CAD FILE: MFO-M8M4-LCR.SLDDRW		SHEET 1 OF 1

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)