

8 7 6 5 4 3 2 1  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

| REVISIONS |                 |        |           |
|-----------|-----------------|--------|-----------|
| REV       | DESCRIPTION     | DATE   | APPROVED  |
| A         | INITIAL RELEASE | 8/6/21 | PHOSPODAR |
|           |                 |        |           |
|           |                 |        |           |
|           |                 |        |           |

D

D

C

C


B

B

A

A

| WIRING MAP<br>TYPE B |        |    |
|----------------------|--------|----|
| J1                   | COLOR  | J2 |
| 1                    | BLUE   | 12 |
| 2                    | ORANGE | 11 |
| 3                    | GREEN  | 10 |
| 4                    | BROWN  | 9  |
| 5                    |        | 8  |
| 6                    |        | 7  |
| 7                    |        | 6  |
| 8                    |        | 5  |
| 9                    | YELLOW | 4  |
| 10                   | PURPLE | 3  |
| 11                   | ROSE   | 2  |
| 12                   | AQUA   | 1  |

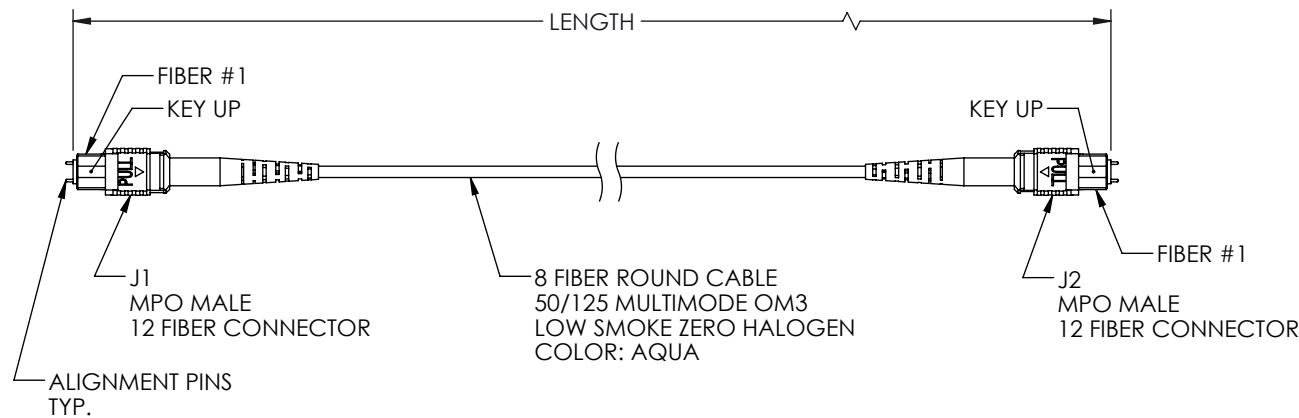

| PART NUMBER     | METERS [FEET] |
|-----------------|---------------|
| MPC-MM8M3-BZ-1  | 1.0 [3.28]    |
| MPC-MM8M3-BZ-3  | 3.0 [9.84]    |
| MPC-MM8M3-BZ-5  | 5.0 [16.40]   |
| MPC-MM8M3-BZ-10 | 10.0 [32.81]  |

#### REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

|   |                          |  |                                 |                           |                                 |  |  |
|---|--------------------------|--|---------------------------------|---------------------------|---------------------------------|--|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]   | APPROVALS                | DATE   | PolyPhaser<br>an INFINITE brand | CATEGORY                  | FIBER OPTICS                    |  |  |
| OVERALL CABLE LENGTH TOLERANCE:<br>≤12 [305] = +1 [25] / -0<br>>12 [305] ≤60 [1524] = +2 [51] / -0<br>>60 [1524] ≤120 [3048] = +4 [102] / -0<br>>120 [3048] ≤300 [7620] = +6 [152] / -0<br>>300 [7620] = +5% / -0 | DRAWN BY<br>DMAY         | 7/22/21  |                                 |                           |                                 |  |  |
|   | CHECKED BY<br>PHOSPODAR  | 8/6/21   |                                 |                           |                                 |  |  |
|   | APPROVED BY<br>PHOSPODAR | 8/6/21   |                                 |                           |                                 |  |  |
| ALL OTHER DIMENSIONAL TOLERANCES:<br>.X = ± .2 [5]      FRACTIONS<br>.XX = ± .02 [.5]      ± 1/32<br>.XXX = ± .005 [.13]      ANGLES ± 1°   |                          |  |                                 |                           |                                 |  |  |
| THIRD-ANGLE PROJECTION  |                          | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | PRODUCT DESCRIPTION             |                           |                                 |  |  |
|   |                          | COLOR VARIATIONS MAY OCCUR                               | SIZE<br><b>A</b>                | CAGE CODE<br><b>30992</b> | ITEM NO.<br><b>MPC-MM8M3-BZ</b> |  |  |
|   |                          |  | REV.<br><b>A</b>                |                           |                                 |  |  |
| SCALE: NONE   |                          | CAD FILE: MPC-MM8M3-BZ.SLDDRW                            | SHEET 1 OF 1                    |                           |                                 |  |  |