


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

WIRING MAP			
LC	COLOR	1X12	REF DES
1	BLUE	1	J1
2	ORANGE	2	
3	GREEN	3	
4	BROWN	4	
5	GRAY	5	
6	WHITE	6	
7	RED	7	
8	BLACK	8	
9	YELLOW	9	
10	PURPLE	10	
11	ROSE	11	
12	AQUA	12	

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/13/21	PHOSPODAR

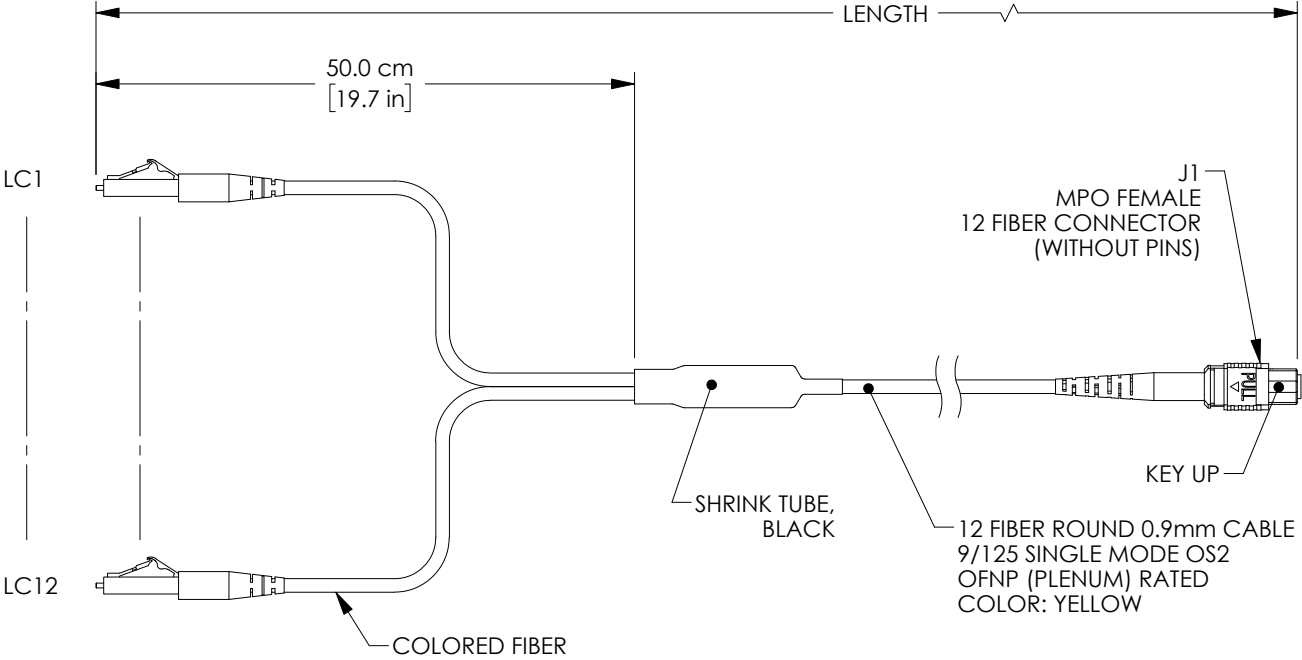

PART NUMBER	METERS (FEET)
MPF12SM-09LCR-1	1.0 (3.28)
MPF12SM-09LCR-3	3.0 (9.84)
MPF12SM-09LCR-5	5.0 (16.40)
MPF12SM-09LCR-10	10.0 (32.81)

NOTES:

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A CLEAR POLY BAG AND LABELED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITI brand 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DFRISIELLO		08/13/2021			
		CHECKED BY PHOSPODAR		08/13/2021		CATEGORY	
		APPROVED BY PHOSPODAR		08/13/2021		FIBER OPTICS	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION MPO w/o pins to LC fanout fiber, 0.9mm diameter, 12 fiber, OS2 9/125um			
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 30992	ITEM NO. MPF12SM-09LCR	REV. A
				SCALE: NONE		CAD FILE: MPF12SM-09LCR.SLDDRW	
						SHEET 1 OF 1	