


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

WIRING MAP


PAIR	LC	1X24	REF DES
P1	1	1	J1
	13	13	
P2	2	2	
	14	14	
P3	3	3	
	15	15	
P4	4	4	
	16	16	
P5	5	5	
	17	17	
P6	6	6	
	18	18	
P7	7	7	
	19	19	
P8	8	8	
	20	20	
P9	9	9	
	21	21	
P10	10	10	
	22	22	
P11	11	11	
	23	23	
P12	12	12	
	24	24	

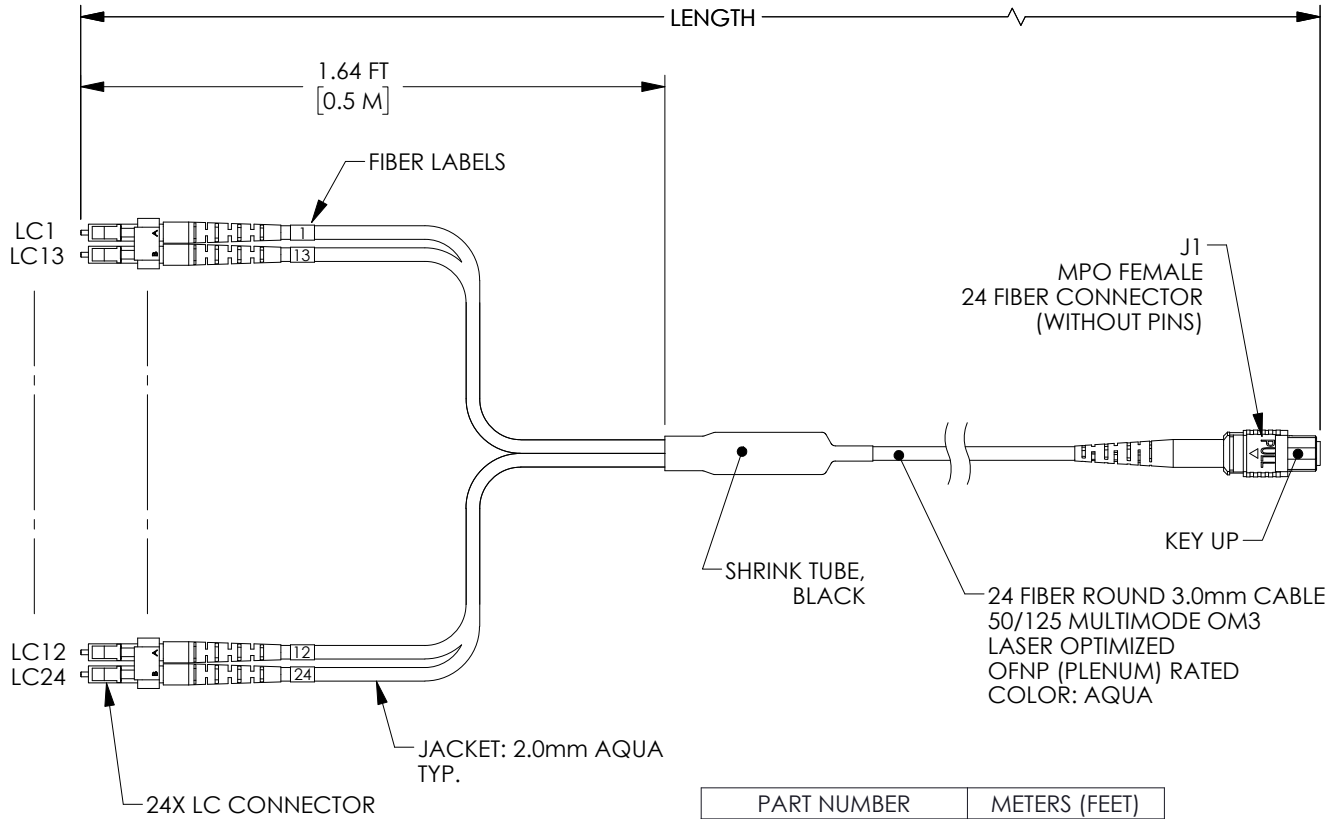

PART NUMBER	METERS (FEET)
MPF24M3-20LCR-1	1.0 (3.28)
MPF24M3-20LCR-3	3.0 (9.84)
MPF24M3-20LCR-5	5.0 (16.40)
MPF24M3-20LCR-10	10.0 (32.81)

NOTES:

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A CLEAR POLY BAG AND LABELED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITI brand 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041			
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤1524 [1524] = +2 [51] / -0 >60 [1524] ≤3048 [3048] = +4 [102] / -0 >120 [3048] ≤7620 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DFRISIELLO		08/16/2021					
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5] FRACTIONS .XX = ±.02 [.5] ± 1/32 .XXX = ±.005 [.13] ANGLES ± 1°		CHECKED BY PHOSPODAR		08/16/2021					
THIRD-ANGLE PROJECTION 		APPROVED BY PHOSPODAR		08/16/2021					
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY FIBER OPTICS				PRODUCT DESCRIPTION MPO w/o pins to LC fanout fiber, 2.0mm diameter, 24 fiber, OM3 50/125um			
COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 30992				ITEM NO. MPF24M3-20LCR	REV. A
		SCALE: NONE		CAD FILE: MPF24M3-20LCR.SLDDRW				SHEET 1 OF 1	