


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.


WIRING MAP

PAIR	LC	1X24	REF DES
P1	1	1	J1
	13	13	
P2	2	2	
	14	14	
P3	3	3	
	15	15	
P4	4	4	
	16	16	
P5	5	5	
	17	17	
P6	6	6	
	18	18	
P7	7	7	
	19	19	
P8	8	8	
	20	20	
P9	9	9	
	21	21	
P10	10	10	
	22	22	
P11	11	11	
	23	23	
P12	12	12	
	24	24	

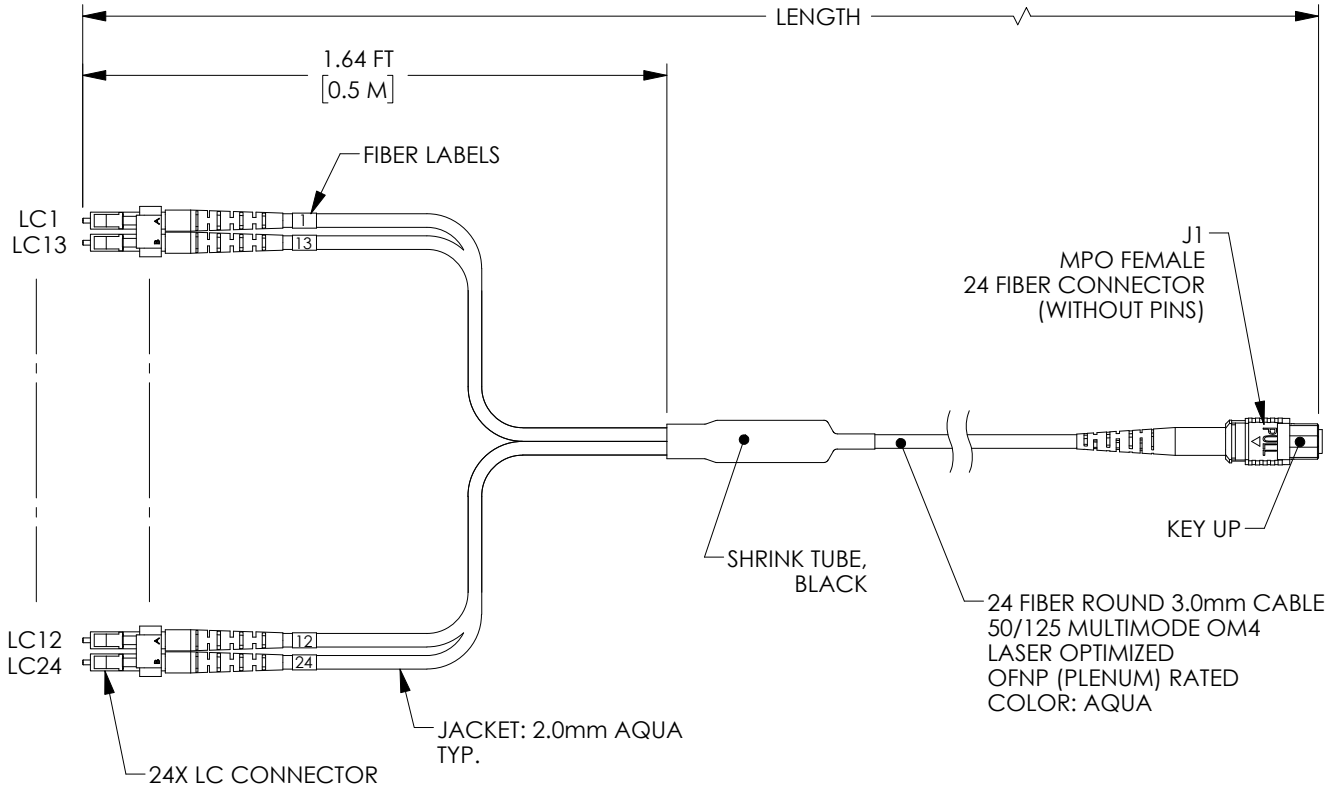

PART NUMBER	METERS (FEET)
MPF24M4-20LCR-1	1.0 (3.28)
MPF24M4-20LCR-3	3.0 (9.84)
MPF24M4-20LCR-5	5.0 (16.40)
MPF24M4-20LCR-10	10.0 (32.81)

- NOTES:
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A CLEAR POLY BAG AND LABELED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 an INFINITI brand 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041
	DRAWN BY DFRISIELLO	08/16/2021	
	CHECKED BY PHOSPODAR	08/16/2021	
	APPROVED BY PHOSPODAR	08/16/2021	
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY FIBER OPTICS
	COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION MPO w/o pins to LC fanout fiber, 2.0mm diameter, 24 fiber, OM4 50/125um
	SIZE A	CAGE CODE 30992	ITEM NO. MPF24M4-20LCR
	SCALE: NONE	CAD FILE: MPF24M4-20LCR.SLDDRW	REV. A