


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

WIRING MAP

PAIR	LC	1X24	REF DES
P1	1	1	P1
	13	13	
P2	2	2	
	14	14	
P3	3	3	
	15	15	
P4	4	4	
	16	16	
P5	5	5	
	17	17	
P6	6	6	
	18	18	
P7	7	7	
	19	19	
P8	8	8	
	20	20	
P9	9	9	
	21	21	
P10	10	10	
	22	22	
P11	11	11	
	23	23	
P12	12	12	
	24	24	

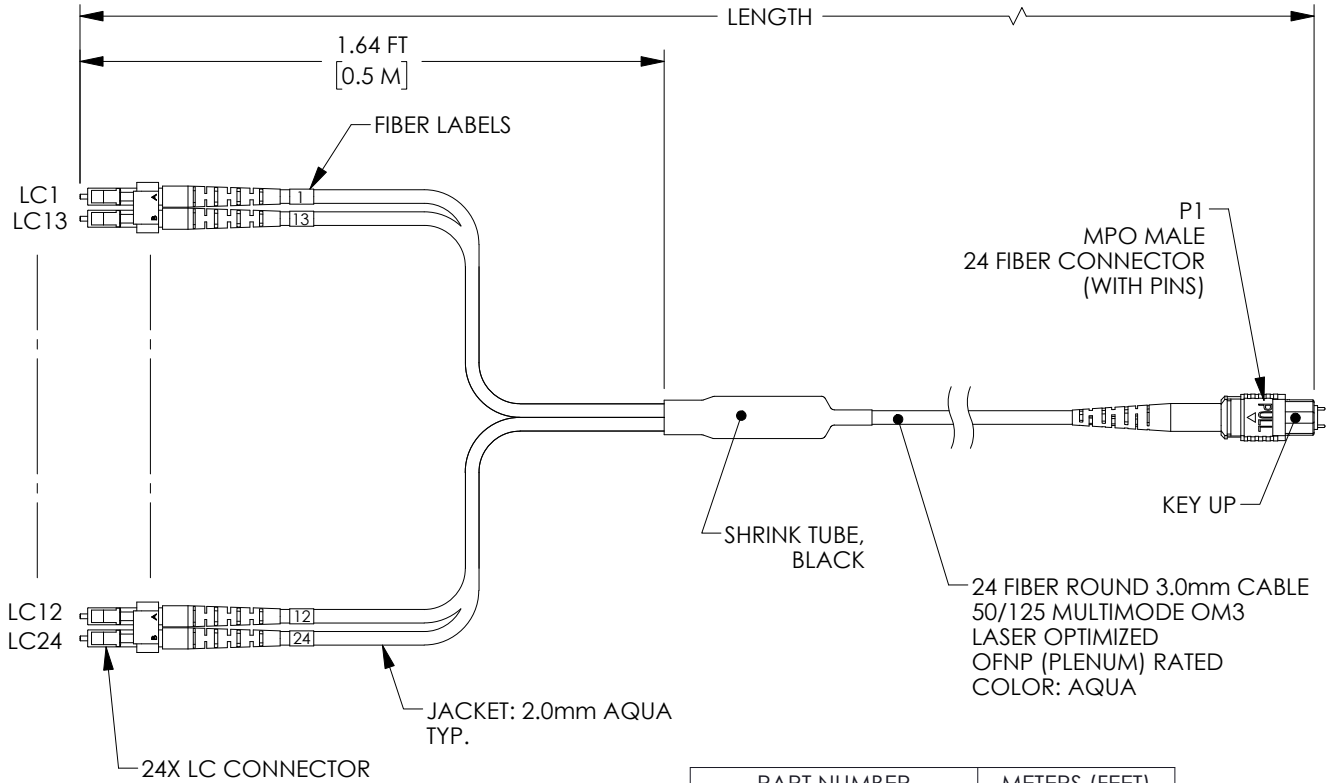

PART NUMBER	METERS (FEET)
MPM24M3-20LCR-1	1.0 (3.28)
MPM24M3-20LCR-3	3.0 (9.84)
MPM24M3-20LCR-5	5.0 (16.40)
MPM24M3-20LCR-10	10.0 (32.81)

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A CLEAR POLY BAG AND LABELED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITI brand		10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DFRISIELLO		08/16/2021		CATEGORY		FIBER OPTICS	
CHECKED BY PHOSPODAR		08/16/2021		APPROVED BY PHOSPODAR		08/16/2021			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] .XX = ± .02 [.5] .XXX = ± .005 [.13]		FRACTIONS ± 1/32 ANGLES ± 1°		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION MPO w/ pins to LC fanout fiber, 2.0mm diameter, 24 fiber, OM3 50/125um			
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 30992		ITEM NO. MPM24M3-20LCR	
				SCALE: NONE		CAD FILE: MPM24M3-20LCR.SLDDRW		REV. A	
								SHEET 1 OF 1	