


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/16/21	PHOSPODAR

## WIRING MAP

PAIR	LC	1X24	REF DES
P1	1	1	
	13	13	
P2	2	2	
	14	14	
P3	3	3	
	15	15	
P4	4	4	
	16	16	
P5	5	5	
	17	17	
P6	6	6	
	18	18	
P7	7	7	
	19	19	
P8	8	8	
	20	20	
P9	9	9	
	21	21	
10	10	10	
	22	22	
P11	11	11	
	23	23	
P12	12	12	
	24	24	

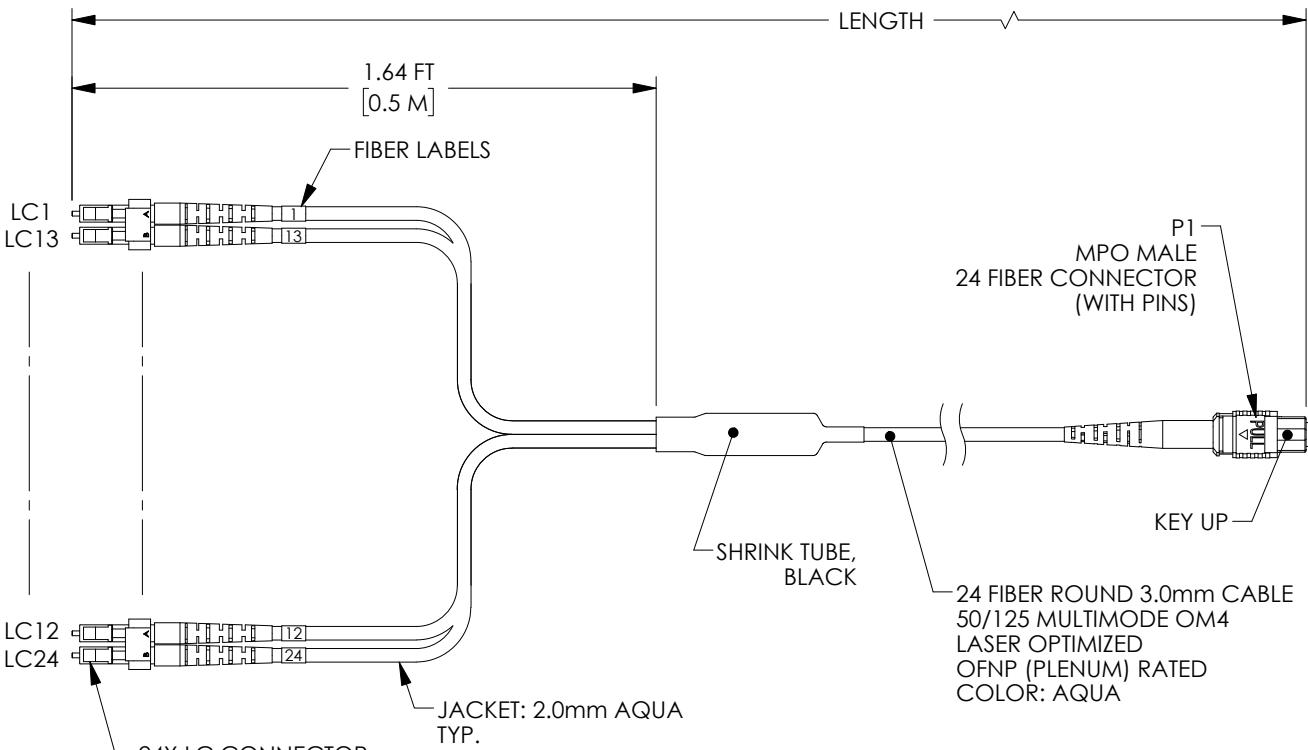

PART NUMBER	METERS (FEET)
MPM24M4-20LCR-1	1.0 (3.28)
MPM24M4-20LCR-3	3.0 (9.84)
MPM24M4-20LCR-5	5.0 (16.40)
MPM24M4-20LCR-10	10.0 (32.81)

## NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A CLEAR POLY BAG AND LABELED.

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:  $\pm 12$  [305] =  $+1$  [25] / -0  
 $>12$  [305]  $\pm 60$  [1524] =  $\pm 12$  [3048] =  $\pm 4$  [102] / -0  
 $>60$  [1524]  $\pm 120$  [3048] =  $\pm 40$  [1024] / -0  
 $>120$  [3048]  $\pm 300$  [7620] =  $\pm 60$  [152] / -0  
 $>300$  [7620] =  $\pm 5%$  / -0

ALL OTHER DIMENSIONAL TOLERANCES

$XX = \pm .2$ [5]	FRACTIONS
$.XX = \pm .02$ [.5]	$\pm 1/32$
$.XXX = \pm .005$ [.13]	ANGLES $\pm 1^\circ$

THIRD-ANGLE PROJECTION



APPROVALS	DATE
DRAWN BY <b>DFRISIELLO</b>	08/16/2022
CHECKED BY <b>PHOSPODAR</b>	08/16/2022
APPROVED BY	

PolyPhaser  
an INFINIT<sup>®</sup> brand

10701 Airport Road,  
Hayden, ID 83835  
Phone: 1.208.635.6400  
Fax: 1.208.955.2041

FIBER OPTICS

**PRODUCT DESCRIPTION**

SIZE		CAGE CODE	ITEM NO.	REV.
<b>A</b>		<b>30992</b>	<b>MPM24M4-20LCR</b>	<b>A</b>
SCALE: NONE		CAD FILE: MPM24M4-20LCR.SLDDRW		SHEET 1 OF 1