


8 7 6 5 4 3 2 1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

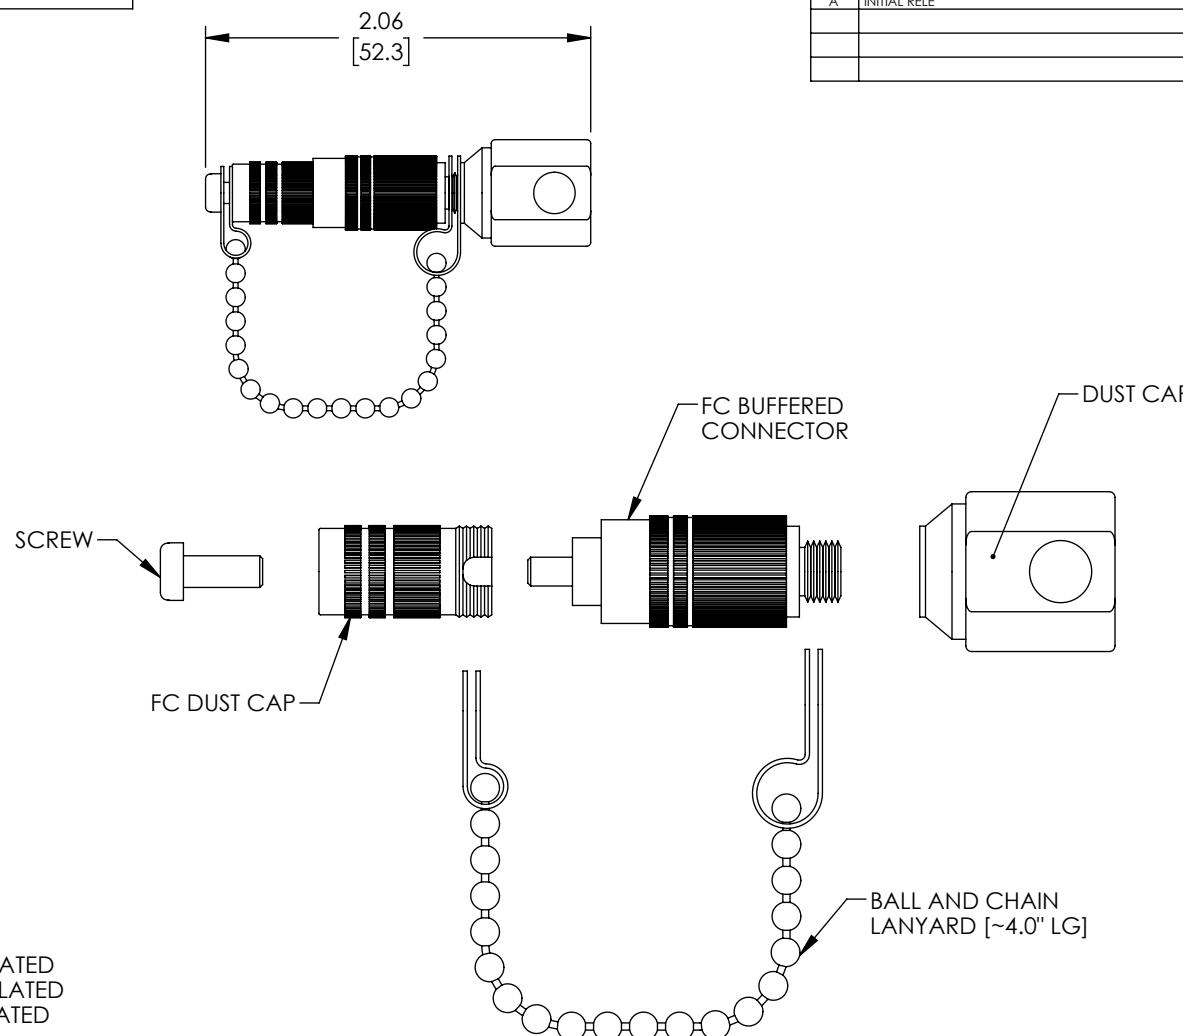

NOTES:

MATERIALS:

HOUSING: DIE-CAST ZINC, NICKEL PLATED
DUST CAPS: DIE-CAST ZINC, NICKEL PLATED
LANYARD: DIE-CAST ZINC, NICKEL PLATED

MALE FC CONNECTOR ASSEMBLY POLISH TYPE: PC
FEMALE FC CONNECTOR ASSEMBLY POLISH TYPE: PC

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE		PHOSPODAR

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	PolyPhaser an INFINITE brand	CATEGORY	FIBER OPTICS
OVERALL CABLE LENGTH TOLERANCE:	DRAWN BY DMAY	05/26/21			
$\leq 12 [305] = +1 [25] / -0$ $> 12 [305] \leq 60 [1524] = +2 [51] / -0$ $> 60 [1524] \leq 120 [3048] = +4 [102] / -0$ $> 120 [3048] \leq 300 [7620] = +6 [152] / -0$ $> 300 [7620] = +5\% / -0$	CHECKED BY PHOSPODAR	06/01/21			
ALL OTHER DIMENSIONAL TOLERANCES: $.X = \pm .2 [5]$ $.XX = \pm .02 [.5]$ $.XXX = \pm .005 [.13]$	APPROVED BY PHOSPODAR	06/01/21			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY					
THIRD-ANGLE PROJECTION		COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 30992	ITEM NO. OFA-FCB9-G-000MMTO
			REV. A	SCALE: NONE	CAD FILE: OFA-FCB9-G-000MMTO.SLDDRW
SHEET 1 OF 1					