
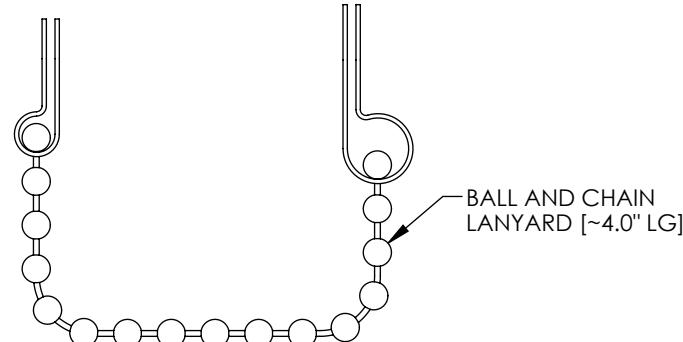
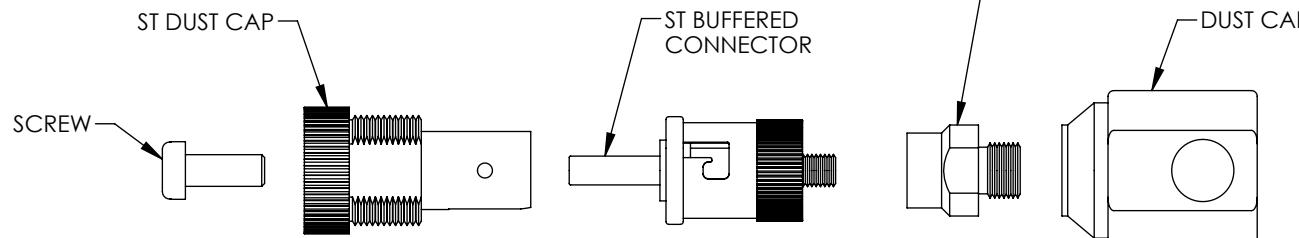


8 7 6 5 4 3 2 1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE		PHOSPODAR

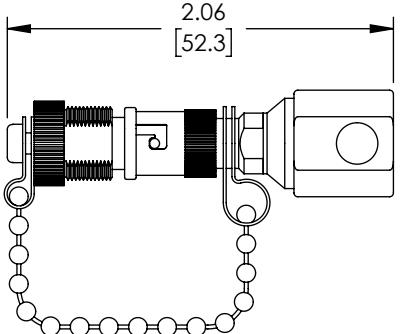

NOTES:

MATERIALS:

HOUSING: DIE-CAST ZINC, NICKEL PLATED
DUST CAPS: DIE-CAST ZINC, NICKEL PLATED
LANYARD: DIE-CAST ZINC, NICKEL PLATED

MALE ST CONNECTOR ASSEMBLY POLISH TYPE: PC
FEMALE ST CONNECTOR ASSEMBLY POLISH TYPE: PC

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	CATEGORY	FIBER OPTICS	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DMAY	05/26/21			
	CHECKED BY PHOSPODAR	06/01/21			
	APPROVED BY PHOSPODAR	06/01/21			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION	
THIRD-ANGLE PROJECTION	COLOR VARIATIONS MAY OCCUR			ST Buffered Fiber Adapter for 900um fiber	
	SIZE A	CAGE CODE 30992	ITEM NO. OFA-STB9-G-000MMTO	REV. A	
	SCALE: NONE	CAD FILE: OFA-STB9-G-000MMTO.SLDDRW		SHEET 1 OF 1	