




8 7 6 5 4 3 2 1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/01/21	PHOSPODAR

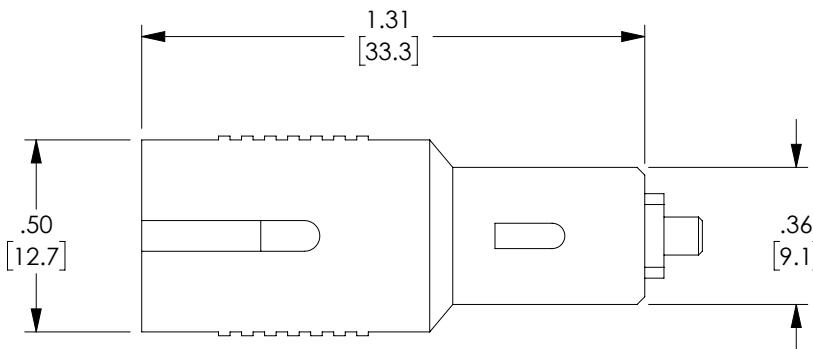


SC FEMALE

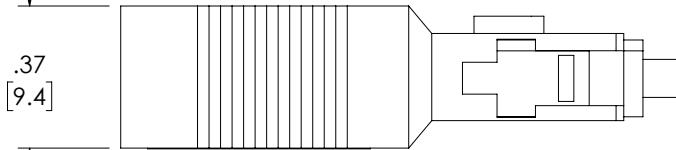

.37
[9.4]



SC MALE

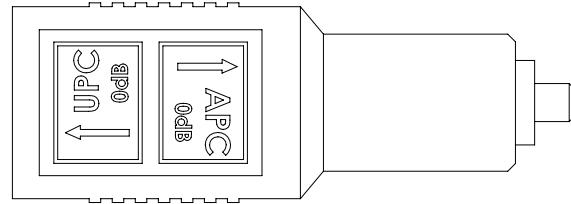

NOTES:

MATERIALS:

HOUSING: METAL

SLEEVE: ZIRCONIA

FEMALE SC CONNECTOR ASSEMBLY POLISH TYPE: UPC
MALE SC CONNECTOR ASSEMBLY POLISH TYPE: APC

ALL DIMESNIONS ARE FOR REFERENCE ONLY.

ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
 ≤ 12 [305] = $+1$ [25] / -0
 > 12 [305] ≤ 60 [1524] = $+2$ [51] / -0
 > 60 [1524] ≤ 120 [3048] = $+4$ [102] / -0
 > 120 [3048] ≤ 300 [7620] = $+6$ [152] / -0
 > 300 [7620] = $+5\%$ / -0

ALL OTHER DIMENSIONAL TOLERANCES:
 $.X = \pm .2$ [5] FRACTIONS
 $.XX = \pm .02$ [5] $\pm 1/32$
 $.XXX = \pm .005$ [.13] ANGLES $\pm 1^\circ$

THIRD-ANGLE PROJECTION



CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

COLOR VARIATIONS
MAY OCCUR

APPROVALS

DRAWN BY

DMAY

05/26/21

CHECKED BY

PHOSPODAR

06/01/21

APPROVED BY

PHOSPODAR

06/01/21

DATE

06/01/21

CATEGORY

PolyPhaser
an INFINIT brand

10701 Airport Road,
Hayden, ID 83835
Phone: 1.208.635.6400
Fax: 1.208.955.2041

FIBER OPTICS

PRODUCT DESCRIPTION
Hybrid Fiber Adapter Single mode
SC/UPC Female to SC/APC Male

SIZE	CAGE CODE	ITEM NO.	REV.
A	30992	OFA-SUFSAM-A-0ZOMMT	A

SCALE: NONE CAD FILE: OFA-SUFSAM-A-0ZOMMT.SLDDRW SHEET 1 OF 1