


8 7 6 5 4 3 2 1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/2021	PHOSPODAR

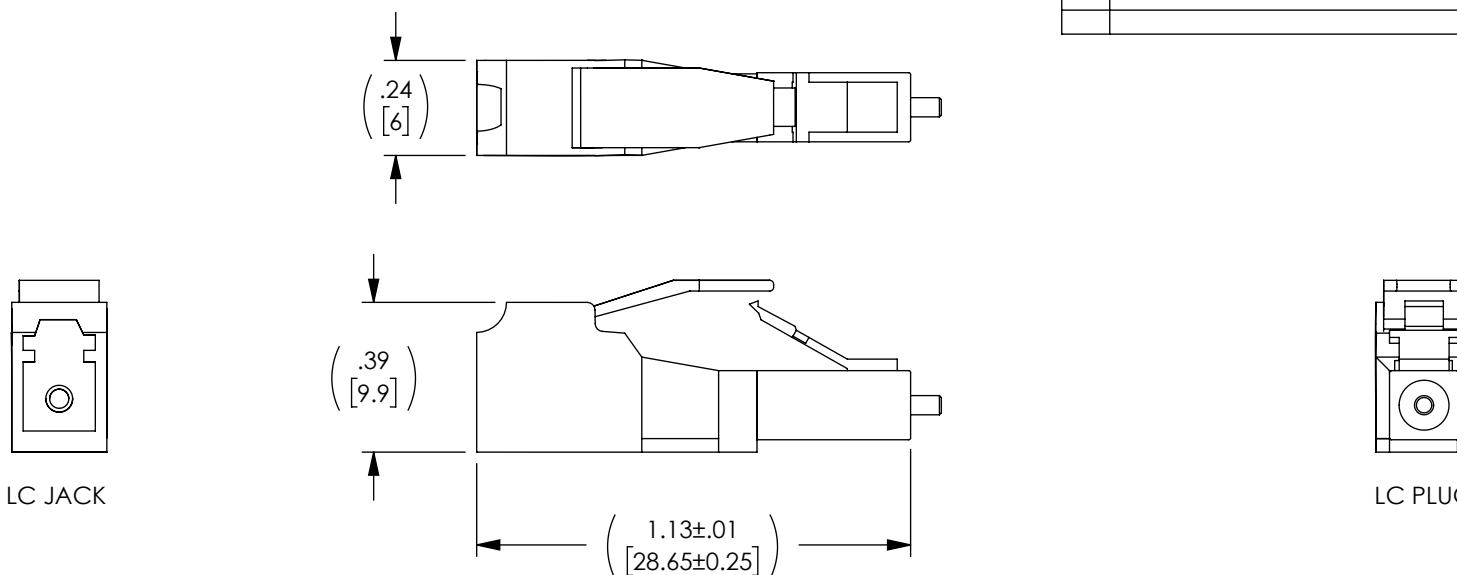

MODEL	ATTENUATION	BACK REFLECTION
OFAT-LCA-01	1dB	≤ -60dB
OFAT-LCA-02	2dB	≤ -60dB
OFAT-LCA-03	3dB	≤ -60dB
OFAT-LCA-07	7dB	≤ -60dB
OFAT-LCA-12	12dB	≤ -60dB
OFAT-LCA-18	18dB	≤ -60dB

NOTES:

1. ATTENUATOR UTILIZES "APC" POLISH.
2. OPERATING TEMPERATURE RANGE: -40° C TO +75° C.
3. SINGLE MODE WAVELENGTH RANGE: 1310-1550 nm.
4. ATTENUATOR IS PACKAGED TWO WITH DUST CAPS INSTALLED (NOT SHOWN).
5. ATTENUATOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	PolyPhaser an INFINIT brand	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DMAY	05/06/2021		
CHECKED BY PHOSPODAR	05/10/2021			
APPROVED BY PHOSPODAR	05/10/2021	CATEGORY	FIBER OPTICS	
PRODUCT DESCRIPTION				
FIBER LC APC ATTENUATOR				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A	CAGE CODE 30992	ITEM NO. OFAT-LCA
THIRD-ANGLE PROJECTION	COLOR VARIATIONS MAY OCCUR	REV. A	SCALE: NONE	CAD FILE: OFAT-LCA.SLDDRW
				SHEET 1 OF 1