


8 7 6 5 4 3 2 1  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISI			
REV	DESCRIPTION	DATE	APPROVED
E	INITIAL RELEASE	05/10/2021	PHOSPODAR

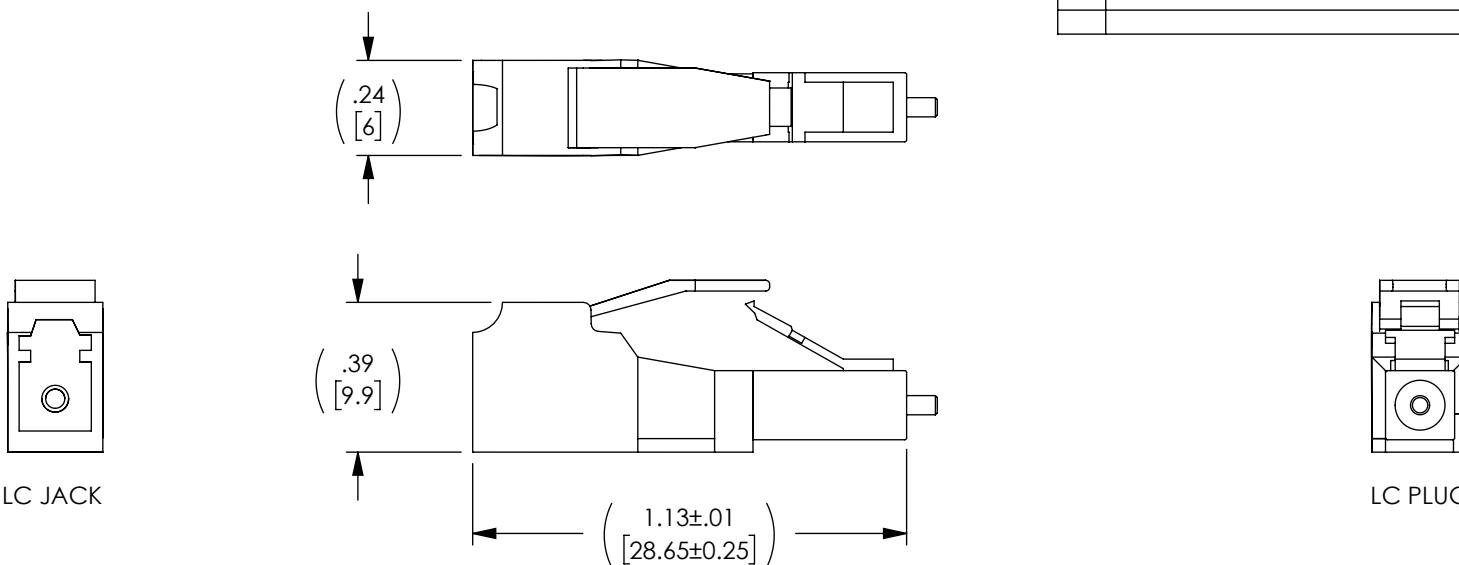

MODEL	ATTENUATION	BACK REFLECTION
OFAT-LCU-01	1dB	≤ -55dB
OFAT-LCU-02	2dB	≤ -55dB
OFAT-LCU-03	3dB	≤ -55dB
OFAT-LCU-07	7dB	≤ -55dB
OFAT-LCU-12	12dB	≤ -55dB
OFAT-LCU-18	18dB	≤ -55dB

#### NOTES:

1. ATTENUATOR UTILIZES "UPC" POLISH.
2. OPERATING TEMPERATURE RANGE: -40° C TO +75° C.
3. SINGLE MODE WAVELENGTH RANGE: 1310-1550 nm.
4. ATTENUATOR IS PACKAGED TWO WITH DUST CAPS INSTALLED (NOT SHOWN).
5. ATTENUATOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

#### REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	PolyPhaser an INFINIT brand	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DMAY	05/06/2021		
CHECKED BY PHOSPODAR	05/10/2021			
APPROVED BY PHOSPODAR	05/10/2021			
CATEGORY		FIBER OPTICS		
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]      FRACTIONS .XX = ± .02 [.5]      ± 1/32 .XXX = ± .005 [.13]      ANGLES ± 1°		FIBER LC UPC ATTENUATOR		
THIRD-ANGLE PROJECTION		COLOR VARIATIONS MAY OCCUR		SIZE <b>A</b>
				CAGE CODE <b>30992</b>
				ITEM NO. <b>OFAT-LCU</b>
		REV. <b>A</b>		
SCALE: NONE		CAD FILE: OFAT-LCU.SLDDRW		SHEET 1 OF 1