


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/2021	PHOSPODAR

D


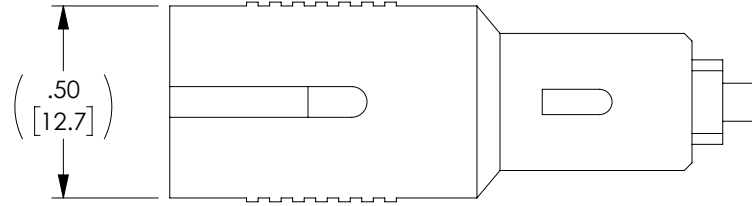


D

C



SC JACK

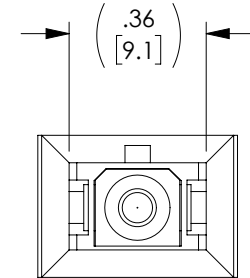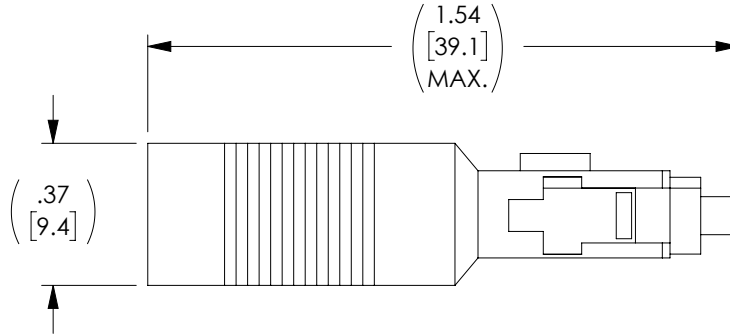

SC PLUG

C

B

MODEL	ATTENUATION	BACK REFLECTION
OFAT-SCA-01	1dB	≤ -60dB
OFAT-SCA-02	2dB	≤ -60dB
OFAT-SCA-03	3dB	≤ -60dB
OFAT-SCA-07	7dB	≤ -60dB
OFAT-SCA-12	12dB	≤ -60dB
OFAT-SCA-18	18dB	≤ -60dB


B

NOTES:

1. ATTENUATOR UTILIZES "UPC" POLISH.
2. OPERATING TEMPERATURE RANGE: -40° C TO +75° C.
3. SINGLE MODE WAVELENGTH RANGE: 1310-1550 nm.
4. ATTENUATOR IS PACKAGED TWO WITH DUST CAPS INSTALLED (NOT SHOWN).
5. ATTENUATOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS	DATE	 an INFINITO brand		10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DMAY	05/06/2021			CATEGORY	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°		CHECKED BY PHOSPODAR	05/10/2021	PRODUCT DESCRIPTION		FIBER SC APC ATTENUATOR	
THIRD-ANGLE PROJECTION 		APPROVED BY PHOSPODAR	05/10/2021	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		FIBER SC APC ATTENUATOR	
COLOR VARIATIONS MAY OCCUR		REF		SIZE A	CAGE CODE 30992	ITEM NO. OFAT-SCA	REV. A
				SCALE: NONE	CAD FILE: OFAT-SCA.SLDDRW		SHEET 1 OF 1

A