


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/01/21	PHOSPODAR

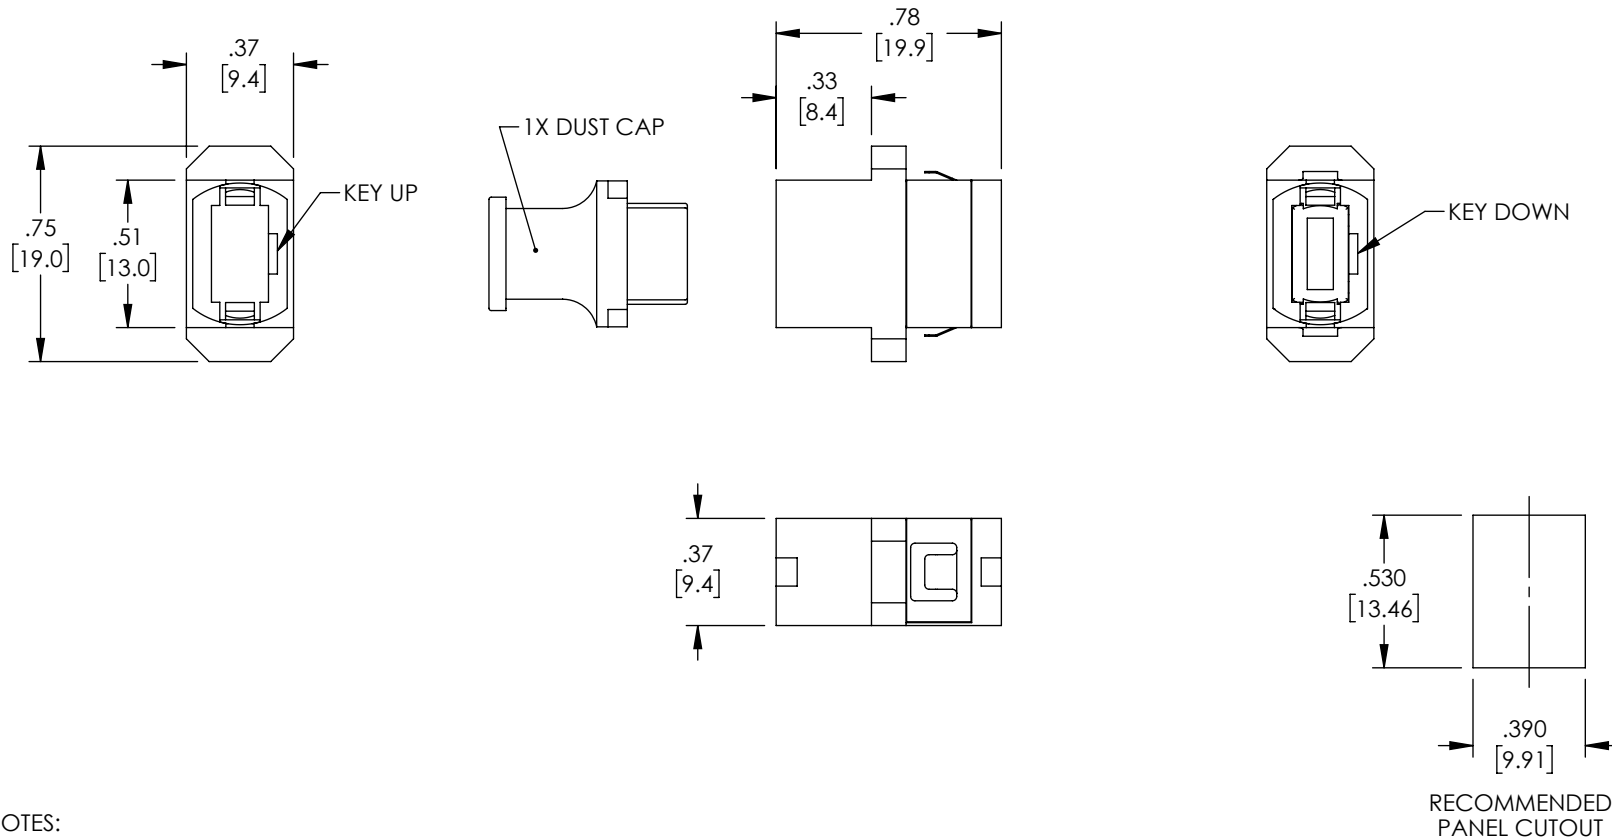

#### NOTES:

#### MATERIALS:

BODY: ABS THERMOPLASTIC, BLACK  
DUST CAP: ENGINEERING PLASTIC, GRAY  
MOUNTING CLIPS: STAINLESS STEEL



RECOMMENDED PANEL THICKNESS: .06" [1.5]

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

#### REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0  ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]      FRACTIONS ± 1/32 .XX = ± .02 [.5]      ANGLES ± 1° .XXX = ± .005 [1.3]  THIRD-ANGLE PROJECTION 	APPROVALS	DATE	 an INFINITO brand		10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
	DRAWN BY DMAY	06/01/21				
	CHECKED BY PHOSPODAR	06/01/21	CATEGORY			
	APPROVED BY PHOSPODAR	06/01/21	FIBER OPTICS			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION MPO/MTP Adapter, Reduced Flange Key Up to Key Down (Type A)			
COLOR VARIATIONS MAY OCCUR			SIZE <b>A</b>	CAGE CODE <b>30992</b>		
			SCALE: NONE	CAD FILE: OFC-MPA-G-MNOPBK0.SLDDRW	SHEET 1 OF 1	