
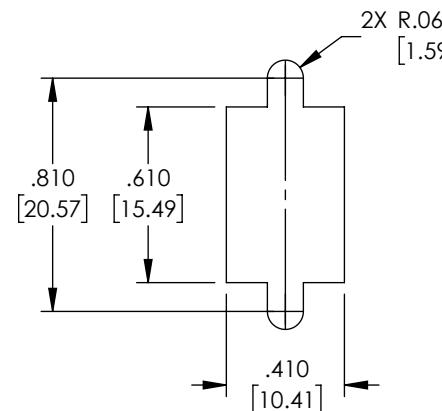

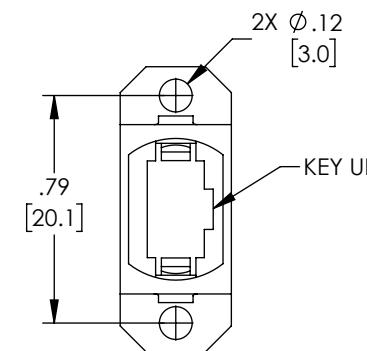

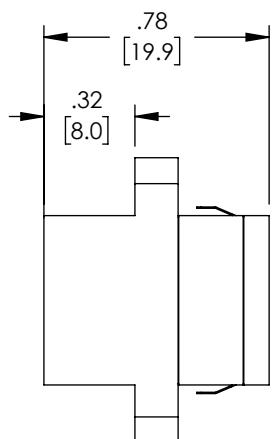



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISI

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/01/21	PHOSPODAR

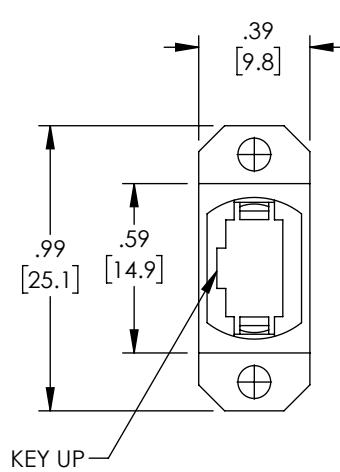

RECOMMENDED  
PANEL CUTOUT

NOTES:

MATERIALS:

BODY: ABS THERMOPLASTIC, BEIGE  
DUST CAP: ENGINEERING PLASTIC, GRAY  
MOUNTING CLIPS: STAINLESS STEEL

RECOMMENDED PANEL THICKNESS: .06" [1.5]

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:

$\leq 12$  [305] =  $+1$  [25] / -0  
 $> 12$  [305]  $\leq 60$  [1524] =  $+2$  [51] / -0  
 $> 60$  [1524]  $\leq 120$  [3048] =  $+4$  [102] / -0  
 $> 120$  [3048]  $\leq 300$  [7620] =  $+6$  [152] / -0  
 $> 300$  [7620] =  $+5\% / -0$

ALL OTHER DIMENSIONAL TOLERANCES:

$.X = \pm .2$  [5]  
 $.XX = \pm .02$  [5]  
 $.XXX = \pm .005$  [1.3]

FRACTIONS  
 $\pm 1/32$   
 ANGLES  $\pm 1^\circ$

THIRD-ANGLE PROJECTION



CONFIGURATION DETAILS OF  
UNDIMENSIONED FEATURES  
MAY VARY

COLOR VARIATIONS  
MAY OCCUR

APPROVALS

DATE

DRAWN BY

DMAY

06/01/21

CHECKED BY

PHOSPODAR

06/01/21

APPROVED BY

PHOSPODAR

06/01/21

**PolyPhaser**  
an INFINIT brand

10701 Airport Road,  
Hayden, ID 83835  
Phone: 1.208.635.6400  
Fax: 1.208.955.2041

CATEGORY

FIBER OPTICS

PRODUCT DESCRIPTION

MPO/MTP Adapter, Full Flange, with 2  
Dust Caps, Key Up to Key Up (Type B)

SIZE

**A**

CAGE CODE

**30992**

ITEM NO.

OFC-MPB-G-1N0PGRD

REV.

**A**

SCALE: NONE

CAD FILE: OFC-MPB-G-1N0PGRD.SLDDRW

SHEET 1 OF 1