


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/01/21	PHOSPODAR

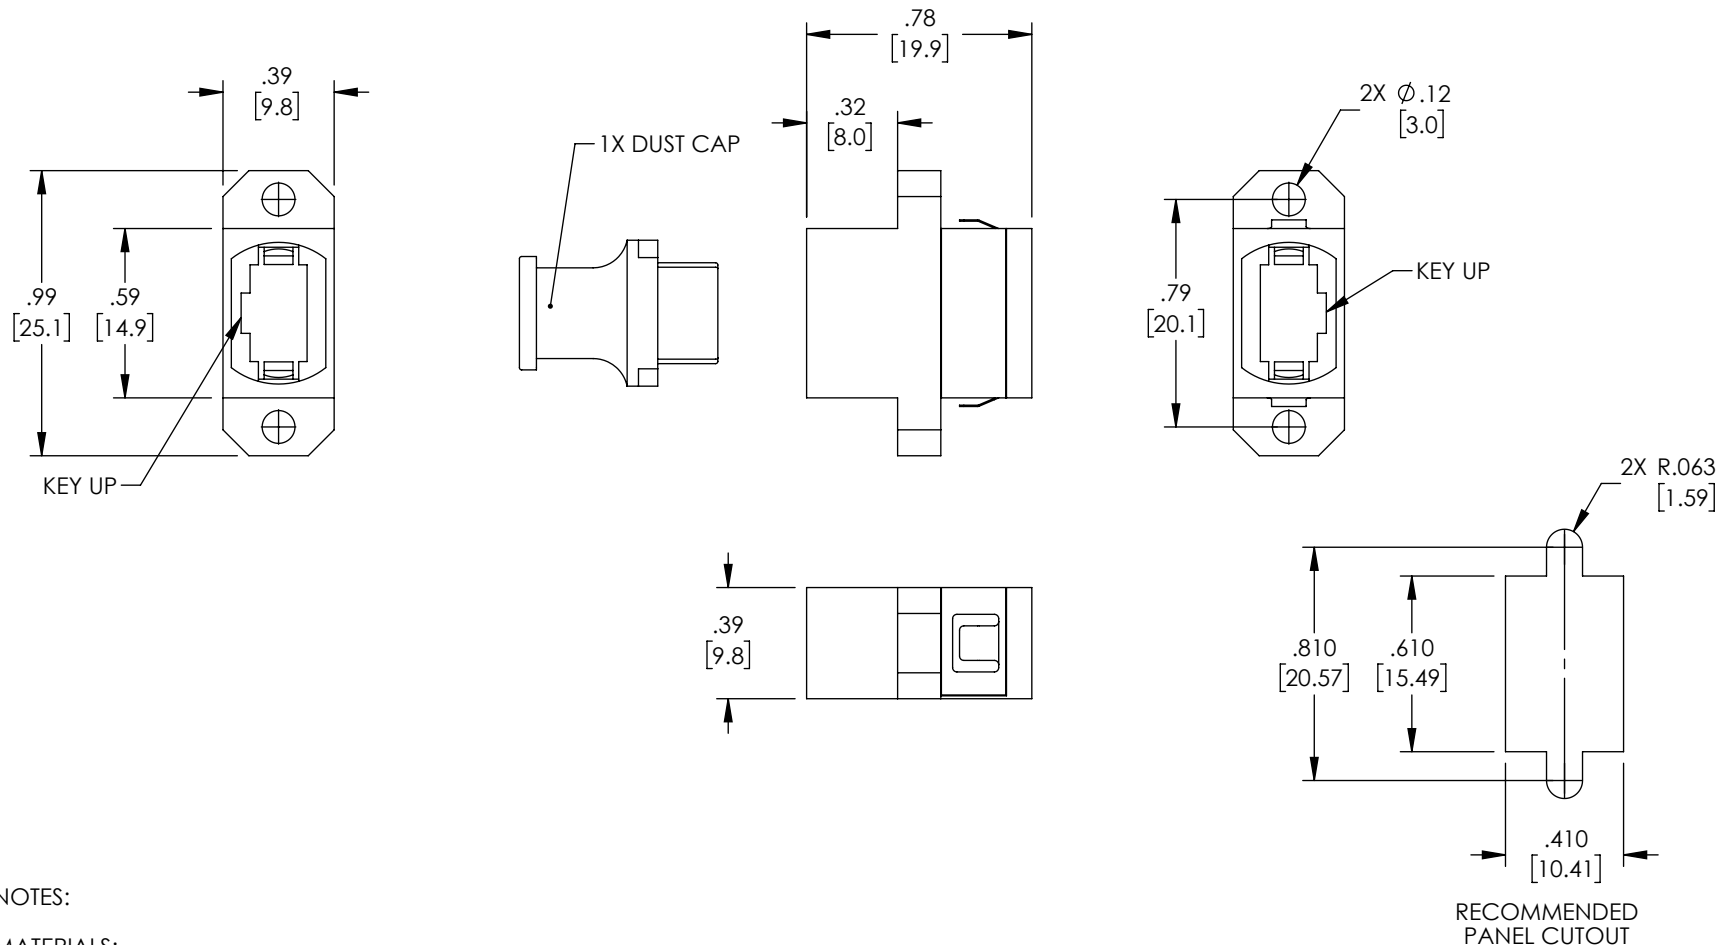

NOTES:

MATERIALS:
BODY: ABS THERMOPLASTIC, BEIGE
DUST CAP: ENGINEERING PLASTIC, GRAY
MOUNTING CLIPS: STAINLESS STEEL



RECOMMENDED PANEL THICKNESS: .06" [1.5]

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS DRAWN BY DMAP 06/01/21		 an INFINITI® brand		10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		CHECKED BY PHOSPODAR 06/01/21		CATEGORY FIBER OPTICS			
ALL OTHER DIMENSIONAL TOLERANCES: $.X = \pm .2$ [5] $.XX = \pm .02$ [.5] $.XXX = \pm .005$ [.13]		APPROVED BY PHOSPODAR 06/01/21					
FRACTIONS $\pm 1/32$ ANGLES $\pm 1^\circ$		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION MPO/MTP Adapter, Full Flange, with 1 Dust Cap, Key Up to Key Up (Type B)			
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 30992	ITEM NO. OFC-MPB-G-1N0PGRS	REV A
				SCALE: NONE	CAD FILE: OFC-MPB-G-1N0PGRS.SLDDRW	SHEET 1 OF	