


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REV. DESCRIPTION DATE APPROVED

A INITIAL RELEASE 06/01/21 PHOSPODAR

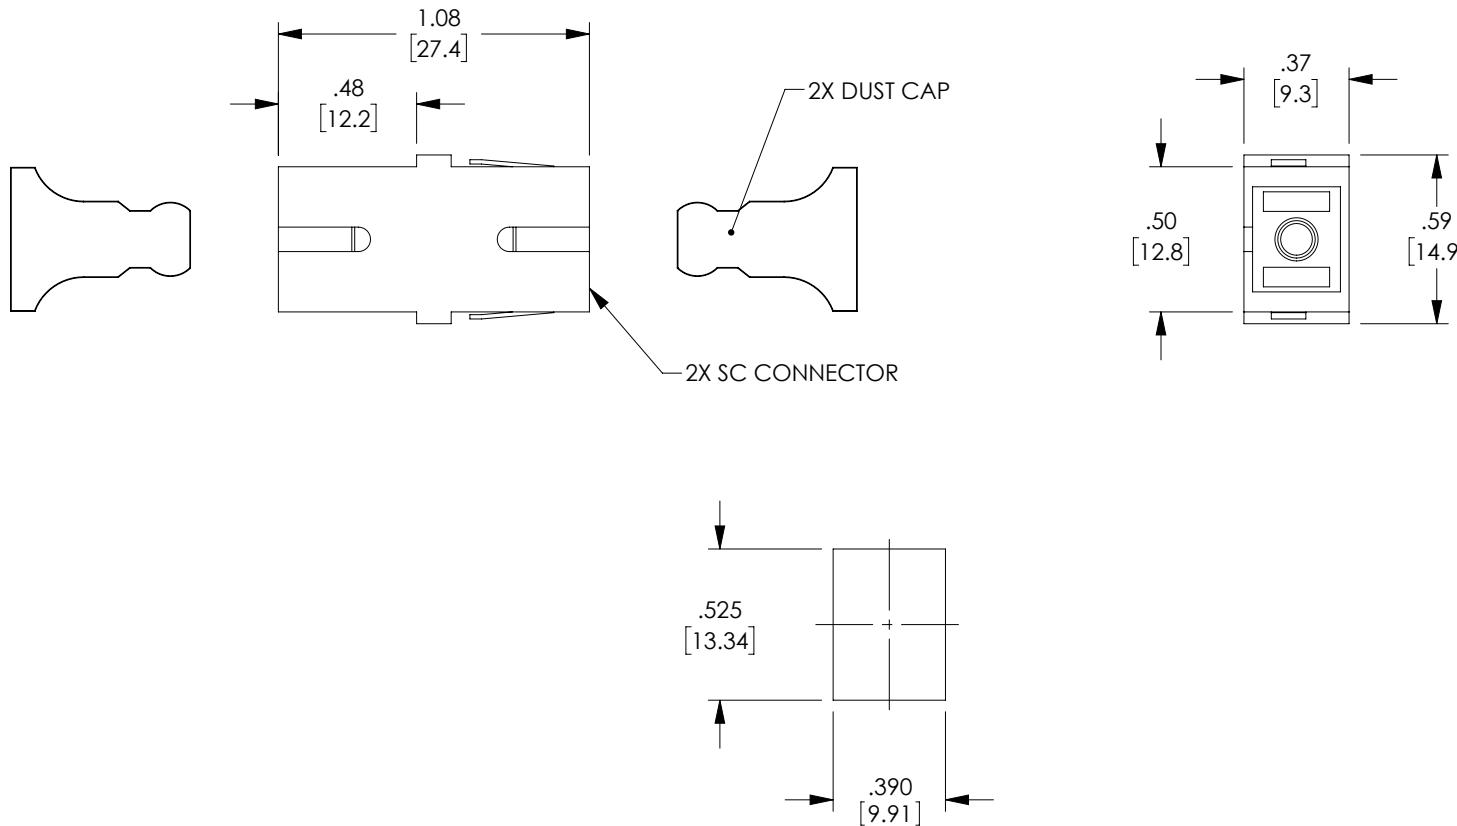

NOTES:

MATERIALS:

BODY: ABS THERMOPLASTIC, AQUA

SLEEVE: BRONZE

DUST CAP: ENGINEERING PLASTIC, BLACK

MOUNTING CLIPS: STAINLESS STEEL

RECOMMENDED PANEL THICKNESS: .06" [1.5]

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

APPROVALS		DATE	PolyPhaser an INFINITE brand		10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041
DRAWN BY DMAY		05/28/21	CATEGORY		FIBER OPTICS
CHECKED BY PHOSPODAR		06/01/21	PRODUCT DESCRIPTION		SC Coupler, Multimode, No Flange, Aqua
APPROVED BY PHOSPODAR		06/01/21	SIZE		REV.
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		ITEM NO.	CAGE CODE	ITEM NO.	REV.
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0					
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [5] ± 1/32 .XXX = ± .005 [13] ANGLES ± 1°		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			
THIRD-ANGLE PROJECTION		COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 30992	ITEM NO. OFC-SCSC-D-0B0PAQ0
			SCALE: NONE	CAD FILE: OFC-SCSC-D-0B0PAQ0.SLDDRW	REV. A
					SHEET 1 OF 1