




REVISI			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/01/21	PHOSPODAR

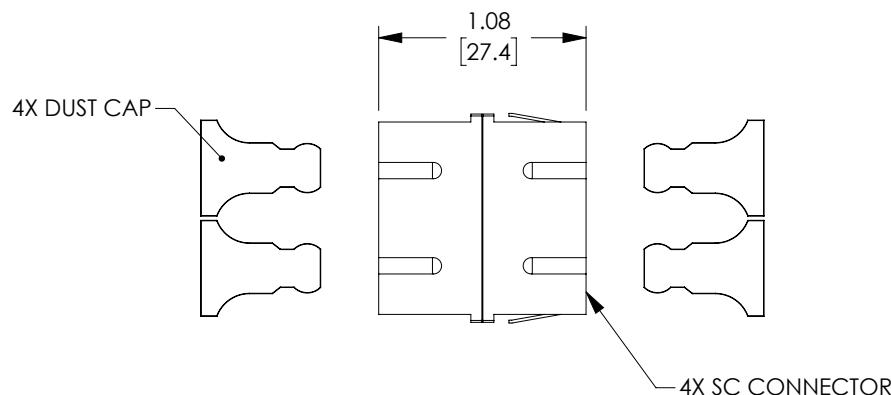

RECOMMENDED
PANEL CUTOUT

NOTES:

MATERIAL:
SLEEVE: BRONZE
BODY: ABS THERMOPLASTIC, BEIGE
DUST CAP: PVC, BLACK
MOUNTING CLIPS: STAINLESS STEEL

RECOMMENDED PANEL THICKNESS: .06" [1.5]

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] FRACTIONS
.XX = ± .02 [5] ± 1/32
.XXX = ± .005 [1.3] ANGLES ± 1°



APPROVALS
DRAWN BY
DMAY
05/28/21

CHECKED BY
PHOSPODAR
06/01/21

APPROVED BY
PHOSPODAR
06/01/21

PolyPhaser
an INFINIT brand

10701 Airport Road,
Hayden, ID 83835
Phone: 1.208.635.6400
Fax: 1.208.955.2041

FIBER OPTICS

PRODUCT DESCRIPTION
SC Duplex Multimode Coupler
No Flange, Beige

SIZE A	CAGE CODE 30992	ITEM NO. OFC-SCSC-E-0B0PBG0	REV. A
SCALE: NONE	CAD FILE: OFC-SCSC-E-0B0PBG0.SLDDRW	SHEET 1 OF 1	