


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/01/21	PHOSPODAR

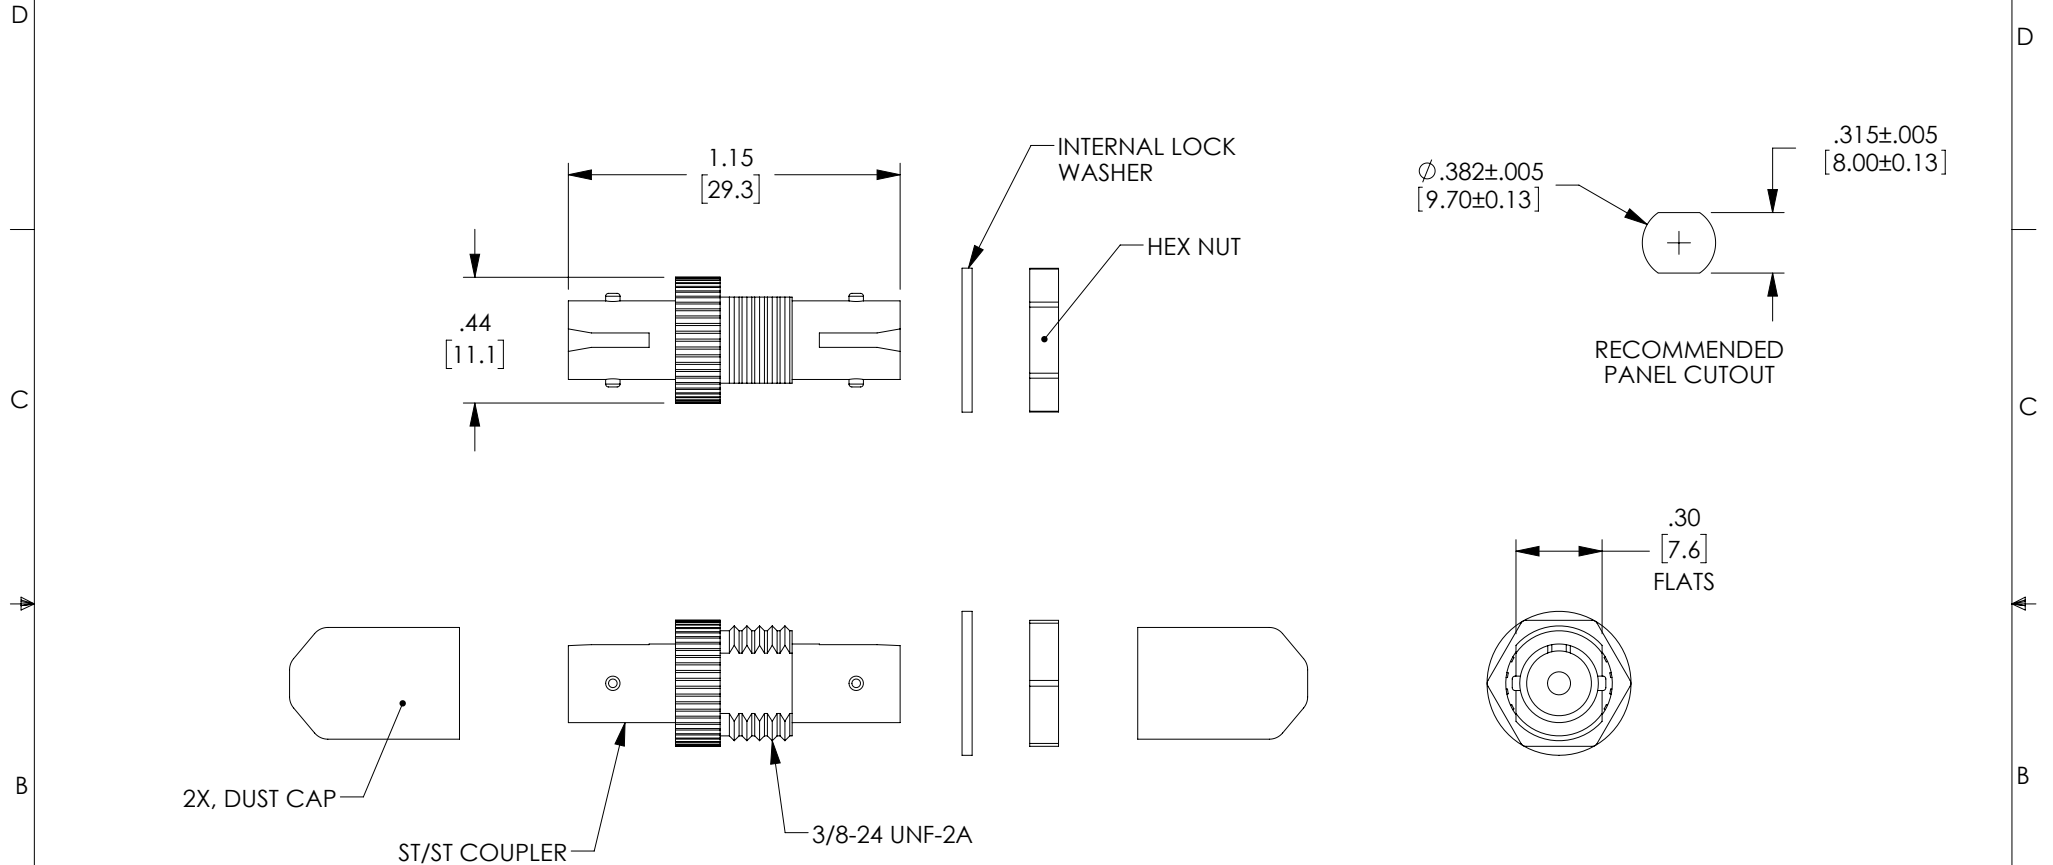

NOTES:

MATERIAL:

SLEEVE: PHOSPHOR BRONZE
BODY: BRASS, NICKEL PLATED
DUST CAP: VINYL, RED



RECOMMENDED PANEL THICKNESS: .06" [1.5]

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		<div>an INFINITO® brand</div>		10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041			
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°		DRAWN BY DMAY		06/01/21		CATEGORY FIBER OPTICS PRODUCT DESCRIPTION ST Simplex Multimode Coupler, Metal Body					
		CHECKED BY PHOSPODAR		06/01/21							
		APPROVED BY PHOSPODAR		06/01/21							
		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY									
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 30992		ITEM NO. OFC-STST-D-HB0MMT0		REV. A	
				SCALE: NONE		CAD FILE: OFC-STST-D-HB0MMT0.SLDDRW				SHEET 1 OF 1	