



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/2021	PHOSPODAR

FIBER TYPE	FIBER CABLE JACKET DIAMETER OPTIONS	
	4.5-4.9mm	5.8-6.2mm
12 FIBER MM LOW LOSS	OFCO-IPMM1M-L480	OFCO-IPMM1M-L600
12 FIBER MM STANDARD	OFCO-IPMM1M-S480	OFCO-IPMM1M-S600
12 FIBER SM LOW LOSS	OFCO-IPMM1S-L480	OFCO-IPMM1S-L600
12 FIBER SM STANDARD	OFCO-IPMM1S-S480	OFCO-IPMM1S-S600
24 FIBER MM LOW LOSS	OFCO-IPMM2M-L480	OFCO-IPMM2M-L600
24 FIBER MM STANDARD	OFCO-IPMM2M-S480	OFCO-IPMM2M-S600
24 FIBER SM STANDARD	OFCO-IPMM2S-S480	OFCO-IPMM2S-S600

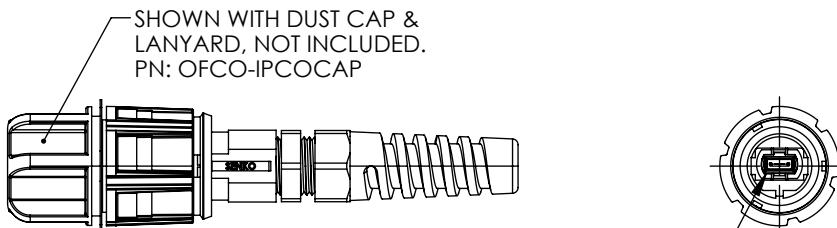

INTERNAL CONN DUST COVER INCLUDED, NOT SHOWN

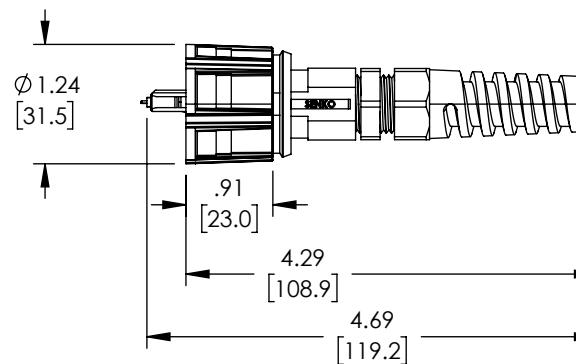

#### NOTES:

- ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

#### REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	PolyPhaser an INFINIT <sup>®</sup> brand	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DMAY	05/05/2021			
	CHECKED BY PHOSPODAR	05/10/2021			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]      FRACTIONS .XX = ± .02 [.5]      ± 1/32 .XXX = ± .005 [.13]      ANGLES ± 1°	APPROVED BY PHOSPODAR	05/10/2021	CATEGORY		
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	THIRD-ANGLE PROJECTION	PRODUCT DESCRIPTION	FIBER OPTIC		
		IP68 MPO MALE CONNECTOR WITH LOCK RING, 4.5-6.2mm	SIZE <b>A</b>	CAGE CODE <b>30992</b>	
			ITEM NO. OFCO-IPMM	REV. <b>A</b>	
		SCALE: NONE	CAD FILE: OFCO-IPMM.SLDDRW	SHEET 1 OF 1	