


8 7 6 5 4 3 2 1  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYPHASER, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYPHASER, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/2021	PHOSPODAR

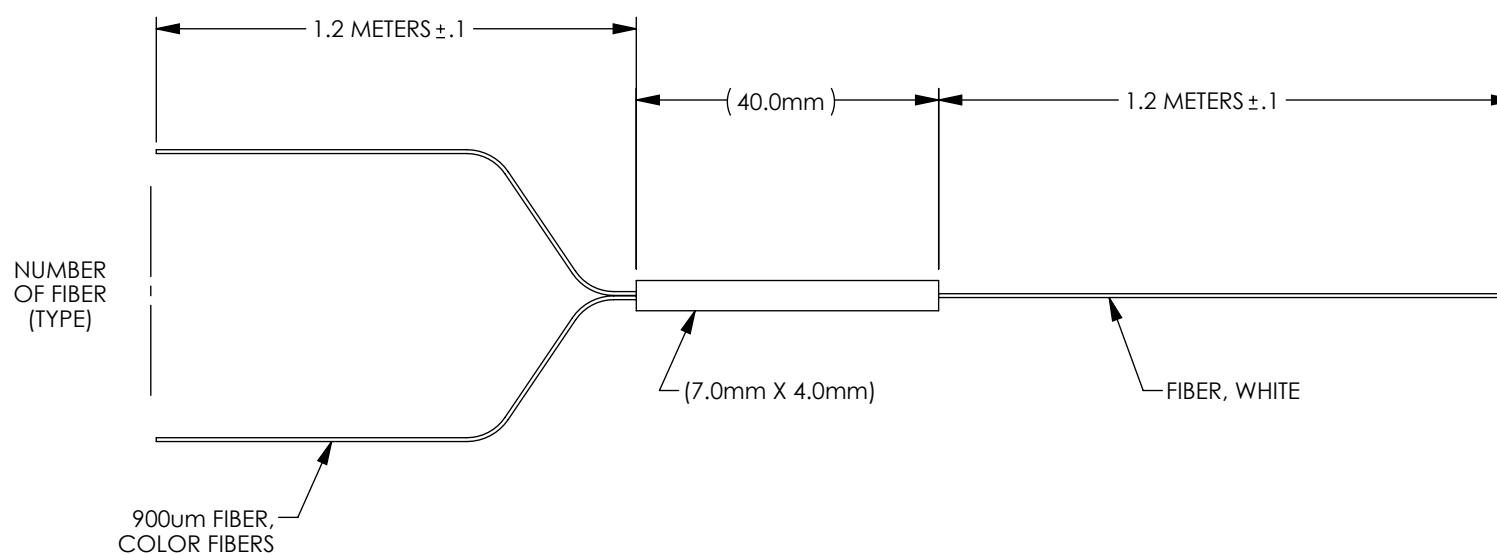

MODEL NUMBER	TYPE	OPERATING WAVELENGTH
PSPF-04BSS-1500	1 X 4	1260nm-1650nm
PSPF-08BSS-1500	1 X 8	
PSPF-16BSS-1500	1 X 16	
PSPF-32BSS-1500	1 X 32	

NOTES:

1. OPERATING TEMPERATURE RANGE:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	<b>PolyPhaser</b> an INFINITE brand	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
OVERALL CABLE LENGTH TOLERANCE: $\leq 12 [305] = +1 [25] / -0$ $> 12 [305] \leq 60 [1524] = +2 [51] / -0$ $> 60 [1524] \leq 120 [3048] = +4 [102] / -0$ $> 120 [3048] \leq 300 [7620] = +6 [152] / -0$ $> 300 [7620] = +5\% / -0$	DRAWN BY DMAY	05/07/2021			
CHECKED BY PHOSPODAR	05/10/2021				
APPROVED BY PHOSPODAR	05/10/2021				
CATEGORY			FIBER OPTICS		
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION Passive PLC Field Unit PLC Splitter (Even) Split 1.0m 900um colored fiber no connector		
ALL OTHER DIMENSIONAL TOLERANCES: $.X = \pm .2 [5]$ FRACTIONS $.XX = \pm .02 [5]$ $.XXX = \pm .005 [13]$ $\pm 1/32$ ANGLES $\pm 1^{\circ}$			SIZE <b>A</b>	CAGE CODE <b>30992</b>	
THIRD-ANGLE PROJECTION			ITEM NO. PSPF-xxxxx-1500	REV. <b>A</b>	
COLOR VARIATIONS MAY OCCUR			SCALE: NONE	CAD FILE: PSPF-xxxxx-1500.SLDDRW	
			SHEET 1 OF 1		