

3 FT Outdoor Rated 4.3-10 to 4.3-10 M Right Angle/M
Right Angle SPO-250 Low PIM Cable Jumper

CASPO250006-3FT




Configuration

- Connector 1: 4.3-10 Male Right Angle
- Connector 2: 4.3-10 Male Right Angle
- Cable Type: SPO-250

Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- PE Jacket
- Shielding Effectivity > 100 dB
- 100% Tested with PIM Test Results Marked on Cable
- 1.25 Inch Minimum Bend Radius
- Low Loss with Excellent VSWR

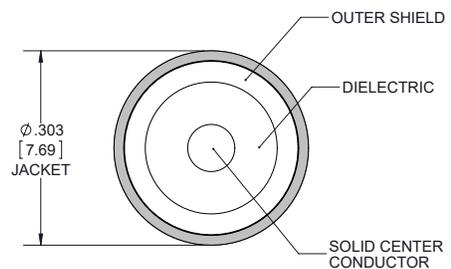

Applications

- Distributed Antennas Systems (DAS)
- Outdoor Installations
- Low PIM Applications
- Multi-Carrier Communication Systems

Description

PolyPhaser CASPO250006-3FT is a 3 FT Outdoor Rated 4.3-10 to 4.3-10 M Right Angle/M Right Angle SPO-250 Low PIM Cable Jumper built using high quality components by skilled technicians to ensure a reliable product. The 4.3-10 Male Right Angle to 4.3-10 Male Right Angle jumper connections are designed to industry standard interface dimensions to ensure superior performance. These low PIM corrugated cable assemblies are durable and outdoor rated for applications that require these parameters. All PolyPhaser cable assemblies are available for same day shipment to fulfill your urgent needs. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as outdoor installations, low PIM applications, distributed antenna systems (DAS), and many other RF systems. The CASPO250006-3FT 4.3-12 to 4.3-12 low PIM cable assembly is the perfect companion to PolyPhaser line of products, particularly when used as an antenna jumper.

The quarter inch low PIM outdoor rated coax used in these 4.3-12 to 4.3-12 assemblies is a .250 inch diameter copper corrugated coax with a black PE jacket. This cable's foam PE dielectric is low loss material with a phase velocity of 83% and offers excellent passive intermodulation (PIM) performance better than -160 dBc. The construction of the quarter inch copper corrugated jumper results in a minimum bend radius of 1.25 inches. The cable assembly's combination of 4.3-12 to 4.3-12 M Right Angle/M Right Angle and Times Microwave's SPO-252 low PIM plenum rated cable supports a maximum operation frequency of 5.8 GHz. Each cable assembly is installed with heat shrink booting on each end and a PIM label with the measured PIM level. You can find detailed performance specifications in the product datasheet. All PolyPhaser assemblies are tested and inspected prior to shipping.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[3 FT Outdoor Rated 4.3-10 to 4.3-10 M Right Angle/M Right Angle SPO-250 Low PIM Cable Jumper CASPO250006-3FT](#)

3 FT Outdoor Rated 4.3-10 to 4.3-10 M Right Angle/M
Right Angle SPO-250 Low PIM Cable Jumper



CASPO250006-3FT

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
Passive Intermodulation		-165	-160	dBc
Capacitance		24 [78.74]		pF/ft [pF/m]
Inductance		0.054 [0.18]		uH/ft [uH/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.45	0.7	1	2.5	5.8	GHz
Insertion Loss (Max.)	0.25	0.32	0.38	0.62	0.98	dB

Electrical Specification Notes:

PIM test results vary between cables

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of $0.1 \cdot \sqrt{\text{FGHz}}$ dB per connector.

Mechanical Specifications

Size

Length	36 in [914.4 mm]
Diameter	0.74 in [18.8 mm]
Weight	0.34 lbs [154.22 g]

Cable

Cable Type	SPO-250
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	Foam PE
Number of Shields	1
Shield Layer 1	Helically Corrugated Copper Tube
Outer Conductor Material and Plating	Copper
Jacket Material	PE, Black
Jacket Diameter	0.303 in [7.7 mm]
One Time Minimum Bend Radius	1.25 in [31.75 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[3 FT Outdoor Rated 4.3-10 to 4.3-10 M Right Angle/M Right Angle SPO-250 Low PIM Cable Jumper CASPO250006-3FT](#)

3 FT Outdoor Rated 4.3-10 to 4.3-10 M Right Angle/M
Right Angle SPO-250 Low PIM Cable Jumper



CASPO250006-3FT

Bending Moment 0.5 lbs-ft [0.68 N-m]

Connectors

Description	Connector 1	Connector 2
Type	4.3-10 Male Right Angle	4.3-10 Male Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Brass, Silver
Contact Plating Specification	200 µin	200 µin
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	80 µin	80 µin
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	200 µin	200 µin
Torque	15.05 in-lbs [1.7 Nm]	15.05 in-lbs [1.7 Nm]

Environmental Specifications

Temperature

Operating Range -55 to +200 deg C
Storage Range -55 to +200 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[3 FT Outdoor Rated 4.3-10 to 4.3-10 M Right Angle/M Right Angle SPO-250 Low PIM Cable Jumper CASPO250006-3FT](#)

3 FT Outdoor Rated 4.3-10 to 4.3-10 M Right Angle/M
Right Angle SPO-250 Low PIM Cable Jumper

CASPO250006-3FT



Compliance Certifications

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 FT Outdoor Rated 4.3-10 to 4.3-10 M Right Angle/M Right Angle SPO-250 Low PIM Cable Jumper CASPO250006-3FT](#)

URL: <https://www.polyphaser.com/3-ft-outdoor-rated-4.3-10-to-4.3-10-m-right-angle-m-right-angle-spo-250-low-pim-cable-jumper-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

3 FT Outdoor Rated 4.3-10 to 4.3-10 M Right Angle/M Right Angle SPO-250 Low PIM Cable Jumper

CASPO250006-3FT CAD Drawing

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	9/16/2020
		APPROVED
		SELLIS

LENGTH MEASURED FROM CONTACT TO CONTACT

2X HEAT SHRINK BOOT

www.POLYPHASER.com
CASPO250006
SIN: XXXXXXXXXX
(SEE NOTE 1)

PIM LEVEL
-ZZZB5C
SIN: XXXXXXXXXX
(SEE NOTE 2)

SPO-250

CONTACT

4.3-10 MALE RA

CONTACT

4.3-10 MALE RA

NOTES:

- CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE END OF THE CONNECTOR.
- 6" FROM CABLE END 1 PLACE FOR ALL LENGTHS OF CABLE.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = +2 [5.08]	FRACTIONS
.XX = +0.02 [.51]	+1/32
.XXX = +0.005 [.13]	ANGLES ±1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0
12 [305] < L ≤ 60 [1524] = +2 [51] / -0
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
300 [7620] < L = +6%L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

PolyPhaser
an INFINITE brand

10701 Airport Road, Hayden, Idaho 83835, USA
Phone: 1.208.635.6400 | 1.800.882.9110
Fax: 1.208.762.6133
Website: www.PolyPhaser.com
E-mail: CustomerService@PolyPhaser.com

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	30992	K.DANG	CASPO250006
REV			A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.