

25 M Outdoor Rated Type N to 7/16 DIN M/M
Right Angle SPO-250 Low PIM Cable Jumper



CASPO250012-25M


Configuration

- Connector 1: 7/16 DIN Male Right Angle
- Connector 2: N Male
- Cable Type: SPO-250



Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- PE Jacket
- Shielding Effectivity > 100 dB
- 100% Tested with PIM Test Results Marked on Cable
- 1.25 Inch Minimum Bend Radius
- Low Loss with Excellent VSWR

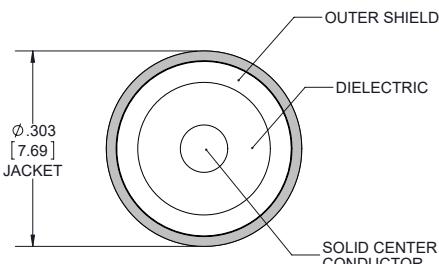

Applications

- Distributed Antennas Systems (DAS)
- Low PIM Applications
- Outdoor Installations
- Multi-Carrier Communication Systems

Description

PolyPhaser CASPO250012-25M is a 25 M Outdoor Rated Type N to 7/16 DIN M/M Right Angle SPO-250 Low PIM Cable Jumper built using high quality components by skilled technicians to ensure a reliable product. The Type N Male to 7/16 DIN Male Right Angle jumper connections are designed to industry standard interface dimensions to ensure superior performance. These low PIM corrugated cable assemblies are durable and outdoor rated for applications that require these parameters. All PolyPhaser cable assemblies are available for same day shipment to fulfill your urgent needs. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as distributed antenna systems (DAS), outdoor installations, low PIM applications, and many other RF systems. The CASPO250012-25M Type N to 7/16 DIN low PIM cable assembly is the perfect companion to PolyPhaser line of products, particularly when used as an antenna jumper.

The quarter inch low PIM outdoor rated coax used in these Type N to 7/16 DIN assemblies is a .250 inch diameter copper corrugated coax with a black PE jacket. This cable's foam PE dielectric is low loss material with a phase velocity of 83% and offers excellent passive intermodulation (PIM) performance better than -160 dBc. The construction of the quarter inch copper corrugated jumper results in a minimum bend radius of 1.25 inches. The cable assembly's combination of Type N to 7/16 DIN M/M Right Angle and Times Microwave's SPO-259 low PIM plenum rated cable supports a maximum operation frequency of 5.8 GHz. Each cable assembly is installed with heat shrink booting on each end and a PIM label with the measured PIM level. You can find detailed performance specifications in the product datasheet. All PolyPhaser assemblies are tested and inspected prior to shipping.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[25 M Outdoor Rated Type N to 7/16 DIN M/M Right Angle SPO-250 Low PIM Cable Jumper CASPO250012-25M](#)

25 M Outdoor Rated Type N to 7/16 DIN M/M
Right Angle SPO-250 Low PIM Cable Jumper



CASPO250012-25M

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 83 | | % |
| Passive Intermodulation | | | -160 | dBc |
| Capacitance | | 24 [78.74] | | pF/ft [pF/m] |
| Inductance | | 0.054 [0.18] | | uH/ft [uH/m] |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-------|------|-------|--------|--------|-------|
| Frequency | 0.45 | 0.7 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Max.) | 40.53 | 49.2 | 63.89 | 101.94 | 164.22 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. Insertion Loss is estimated as 0.1 dB for the right angle connector and 0.1*SQRT(FGHz) dB for the straight connector.

Mechanical Specifications

Size

| | |
|----------|---------------------|
| Length | 984.252 in [25 m] |
| Diameter | 1.14 in [28.96 mm] |
| Weight | 4.565 lbs [2.07 Kg] |

Cable

| | |
|--------------------------------------|----------------------------------|
| Cable Type | SPO-250 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper Clad Aluminum |
| Dielectric Type | Foam PE |
| Number of Shields | 1 |
| Shield Layer 1 | Helically Corrugated Copper Tube |
| Outer Conductor Material and Plating | Copper |
| Outer Conductor Diameter | 0.252 in [6.4 mm] |
| Jacket Material | PE, Black |
| Jacket Diameter | 0.303 in [7.7 mm] |

| | |
|------------------------------|--------------------|
| One Time Minimum Bend Radius | 1.25 in [31.75 mm] |
|------------------------------|--------------------|

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[25 M Outdoor Rated Type N to 7/16 DIN M/M Right Angle SPO-250 Low PIM Cable Jumper CASPO250012-25M](#)

25 M Outdoor Rated Type N to 7/16 DIN M/M
Right Angle SPO-250 Low PIM Cable Jumper



CASPO250012-25M

Bending Moment 0.5 lbs-ft [0.68 N-m]

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|---------------------------|-------------------------|
| Type | 7/16 DIN Male Right Angle | N Male |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Silver | Phosphor Bronze, Silver |
| Contact Plating Specification | 196 μ in | 196 μ in |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Nickel | Brass, Tri-Metal |
| Body Plating Specification | 118 μ in | 118 μ in |
| Coupling Nut Material and Plating | Brass, Nickel | Brass, Tri-Metal |
| Coupling Nut Plating Specification | 118 μ in | 118 μ in |
| Torque | 22.127 ft-lbs [30 Nm] | 9.74 in-lbs [1.1 Nm] |

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C
Storage Range -40 to +85 deg C

Compliance Certifications

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [25 M Outdoor Rated Type N to 7/16 DIN M/M Right Angle SPO-250 Low PIM Cable Jumper CASPO250012-25M](#)

URL: <https://www.polyphaser.com/25-m-outdoor-rated-type-n-to-7-16-din-m-m-right-angle-spo-250-low-pim-cable-jumper-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [25 M Outdoor Rated Type N to 7/16 DIN M/M Right Angle SPO-250 Low PIM Cable Jumper CASPO250012-25M](#)

25 M Outdoor Rated Type N to 7/16 DIN M/M
Right Angle SPO-250 Low PIM Cable Jumper



CASPO250012-25M

make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

CASPO250012-25M CAD Drawing

