

## 25 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-500-LLPL Low PIM Cable Jumper

### CASPP500LLPL002-25FT



#### Configuration

- Connector 1: 4.3-10 Male
- Connector 2: 7/16 DIN Male
- Cable Type: SPP-500-LLPL
- Coax Flex Type: Corrugated

#### Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- UL 910 Plenum Rated
- FEP Jacket
- Shielding Effectivity > 100 dB
- 100% Tested with PIM Test Results Marked on Cable
- 1.25 Inch Minimum Bend Radius
- Low Loss with Excellent VSWR


#### Applications

- Distributed Antennas Systems (DAS)
- Low PIM Applications
- Plenum Installations
- Multi-Carrier Communication Systems

#### Description

PolyPhaser CASPP500LLPL002-25FT is a 25 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-500-LLPL Low PIM Cable Jumper built using high quality components by skilled technicians to ensure a reliable product. The 4.3-10 Male to 7/16 DIN Male jumper connections are designed to industry standard interface dimensions to ensure superior performance. These low PIM corrugated cable assemblies are durable and plenum rated for applications that require these parameters. All PolyPhaser cable assemblies are available for same day shipment to fulfill your urgent needs. This high-quality RF coaxial assembly is perfect in many RF Interconnect applications such as low PIM applications, distributed antenna systems (DAS), plenum installations, and many other RF systems. The CASPP500LLPL002-25FT 4.3-10 to 7/16 DIN low PIM cable assembly is the perfect companion to PolyPhaser line of products, particularly when used as an antenna jumper.

The half inch low PIM plenum rated coax used in these 4.3-10 to 7/16 DIN assemblies is a .500 inch diameter copper corrugated coax with a blue FEP jacket. This cable's PTFE dielectric is low loss material with a phase velocity of 76% and offers excellent passive intermodulation (PIM) performance better than -160 dBc. The construction of the half inch copper corrugated jumper results in a minimum bend radius of 1.25 inches. The cable assembly's combination of 4.3-10 to 7/16 DIN M/M and Times Microwave's SPP-500-LLPL low PIM plenum rated cable supports a maximum operation frequency of 5.8 GHz. Each cable assembly is installed with heat shrink booting on each end and a PIM label with the measured PIM level. You can find detailed performance specifications in the product datasheet. All PolyPhaser assemblies are tested and inspected prior to shipping.

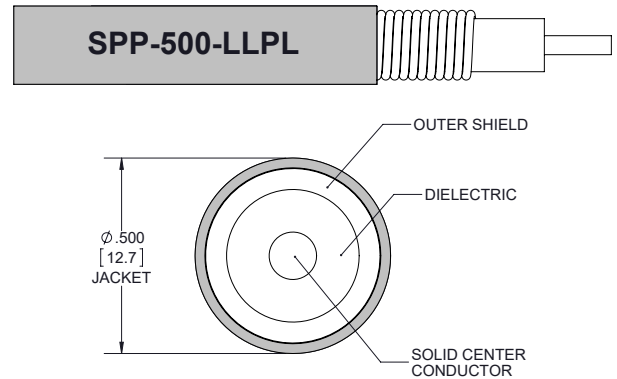

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
Passive Intermodulation		-165	-160	dBc
IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz				

25 FT Plenum Rated 4.3-10 to 7/16 DIN M/M  
SPP-500-LLPL Low PIM Cable Jumper



## CASPP500LLPL002-25FT

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Capacitance		26.2 [85.96]		pF/ft [pF/m]

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.45	0.7	1	2.5	5.8	GHz
Insertion Loss (Max.)	0.74	0.9	1.07	1.7	2.64	dB

Electrical Specification Notes:

PIM test results vary between cables

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1\*SQRT(FGHz) dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length	300 in [762 cm]
Weight	2.03 lbs [920.79 g]

#### Cable

Cable Type	SPP-500-LLPL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Helically Corrugated Copper Tube
Outer Conductor 1 Material and Plating	Copper
Jacket Material	FEP, Blue
Jacket Diameter	0.5 in [12.7 mm]
One Time Minimum Bend Radius	1.5 in [38.1 mm]

25 FT Plenum Rated 4.3-10 to 7/16 DIN M/M  
SPP-500-LLPL Low PIM Cable Jumper



## CASPP500LLPL002-25FT

### Connectors

Description	Connector 1	Connector 2
Type	4.3-10 Male	7/16 DIN Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Silver	Brass, Silver
Contact Plating Specification	200 µin	196 µin
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Tri-Metal
Outer Conductor Plating Specification		118 µin
Body Material and Plating	Brass, Tri-Metal	
Body Plating Specification	80 µin	
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	80 µin	200 µin
Torque	44.25 in-lbs 5 Nm	22.127 ft-lbs 30 Nm

### Environmental Specifications

Operating Range Temperature	-55 to +200 deg C
Storage Range Temperature	-55 to +200 deg C
Plenum Rating	UL910

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:  
Values at 25°C, sea level.

25 FT Plenum Rated 4.3-10 to 7/16 DIN M/M  
SPP-500-LLPL Low PIM Cable Jumper



## CASPP500LLPL002-25FT

### Typical Performance Data

### How to Order

Part Number Configuration: **CASPP500LLPL002**    **- xx**    **uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length

Base Number

Example: CASPP500LLPL002-12 = 12 inches long cable  
CASPP500LLPL002-100cm = 100 cm long cable

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [25 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-500-LLPL Low PIM Cable Jumper CASPP500LLPL002-25FT](#)

URL: <https://www.polyphaser.com/25-ft-plenum-rated-4.3-10-to-7-16-din-m-m-spp-500-llpl-low-pim-cable-jumper-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume liability arising out of the use of any part or document.

CASPP500LLPL002-25FT CAD Drawing
25 FT Plenum Rated 4.3-10 to 7/16 DIN M/M SPP-500-LLPL Low PIM Cable Jumper

